



Tiki3D Master 2025

User Manual

(Jul 2025)

Table of Content

Introduction to Tiki3D Master Software	4
1.1 Overview	4
1.2 System Requirements	6
Tiki3D Master Software Installation and Licensing	7
2.1 Installing Tiki3D Master Software	7
2.2 Tiki3D Master Software Licensing and Updates	8
2.2.1 Account Registration & License Application	8
2.2.2 Trial License Update	8
2.3 Official Version (CodeMeter) License Configuration	8
2.4 Official Version (CodeMeter) License Update	12
2.4.1 Submitting License Update	12
2.4.2 Importing License Update	13
2.5 Official Version (DeepThink) License Configuration	15
2.6 Official Version (DeepThink) License Update	20
Tiki3D Master Product System	22
3.1 Tiki3D Master Main Program	22
3.2 Tiki3D Engine Node Console	22
3.3 Tiki3D Viewer	23
Tiki3D Data Sources	24
Tiki3D Functionality	26
5.1 Tiki3D Job Path Configuration	26
5.2 Tiki3D Master Main Interface	28
5.2.1 Tiki3D Menu Bar	31
5.2.1.1 File	31
5.2.1.2 Task	31
5.2.1.3 Measurement	31

5.2.1.4 Tools	32
5.2.1.5 Tiki3D Toolbar	33
5.2.1.5.1 Displaying and Exporting Log	40
5.2.1.5.2 Coordinate File Modification	41
5.2.1.5.3 Texture Mapping Enhancement Tool	42
5.2.2 Tiki3D Master Project Tree	44
5.2.2.1 Project Name	44
5.2.2.2 Original Photos	48
5.2.2.2.1 Photo Groups	48
5.2.2.2.2 Partition Reference Points (Control Points).....	51
5.2.2.2.3 Photo Block Division	51
5.2.2.3 Point Cloud Collection	55
5.2.2.4 Aerotriangulation Task.....	57
5.2.2.4.1 AT Task Options.....	57
5.2.2.4.2 AT Task Properties.....	58
5.2.2.5 Reconstruction Task.....	59
5.2.2.5.1 Reconstruction Task Options.....	59
5.2.2.5.2 Reconstruction Task Properties.....	61
5.3 Tiki3D Master Workflow Guide	63
5.3.1 Creating a New Project.....	63
5.3.2 Image Loading	63
5.3.2.2 Importing POS Files	65
5.3.4.2 Viewing Aerotriangulation Reports	84
5.3.4.3 Import Custom Coordinate System.....	88
Selecting the Control Point Coordinate System.....	91
Geometric Constraint.....	104
5.4 Tiki3D Viewer Browser.....	117

Introduction to Tiki3D Master Software

1.1 Overview

Tiki3D is a fully automated 3D reality modeling software that integrates technologies such as digital photogrammetry, computer vision, and computer graphics. It is designed for rapid, fully automated 3D reality modeling using oblique photogrammetry. The software generates 3D reality models from various digital images and scanned point clouds. The modeling results can be widely applied in fields such as basic surveying and mapping, urban planning, land resources, military surveying, highways, railways, water conservancy, electric power, energy, environmental protection, agriculture, forestry, and more. The software plays a significant role in improving the efficiency of urban 3D model production, reducing production costs, and promoting the development of 3D reality modeling globally.

Software Advantages:

1. Efficient Aerotriangulation Algorithm:

The unique distributed aerotriangulation algorithm ensures more accurate and robust measurement results, enabling parallel processing of large-scale oblique 3D reality data.

2. Cluster and Multi-OS Support:

Supports cluster computing and multiple operating systems (including Linux), as well as single-machine multi-instance operation to fully utilize computer resources, achieving higher processing efficiency and saving significant modeling time.

3. High Model Fidelity and Precision:

Achieves millimeter-level model accuracy.

4. Advanced Node Management and Monitoring:

Ensures efficient task management and real-time monitoring.

5. Multi-Source Data Output:

Produces mesh models, DEM, DOM, and high precision aerotriangulation results.

Tiki3D Reality 3D Modeling Software Modules:

1. Tiki3D Master:

The main module of Tiki3D reality modeling software, responsible for:

- a. Importing datasets,
- b. Defining processing settings,
- c. Submitting job tasks,
- d. Monitoring job progress,
- e. Browsing processing results, and more.

2. **Tiki3D Engine:**

Handles the core computational tasks for 3D modeling.

3. **Tiki3D Viewer:**

Allows visualization and inspection of the generated 3D models.

This comprehensive software suite ensures efficient, high-quality 3D reality modeling for a wide range of applications.

1.2 System Requirements

Tiki3D software supports running on Microsoft Windows XP/Vista/7/8/10 64-bit operating systems, as well as Linux systems such as CentOS, Ubuntu, and NeoKylin.

It requires at least 8GB of RAM and an NVIDIA GeForce/AMD graphics card with a minimum of 1GB of VRAM. For model reconstruction, OpenGL version 4.6 or higher and Vulkan version 1.2 or higher are required. It is recommended to update the graphics card driver to the latest version.

The software supports both desktop and rack-mounted computers. It can also run on multimedia or gaming laptops, although performance may be significantly reduced in such cases.

Our recommended running configuration is as follows:

- **Memory:** > 64GB
- **CPU:** > 8 threads
- **Disk Capacity:** > 512GB
- **Operating System:** Microsoft Windows XP/Vista/7/8/10/Server
- **Graphics Card:** NVIDIA GTX/Quadro series or AMD series

For more professional hardware configuration advice, please contact Tiki Technologies (support@tiki3d.com). If the computer is configured with multiple graphics cards, the software also supports multi-GPU processing.

Input data, processing data, and output data are best stored on fast storage devices (such as high-speed HDD, SSD, SAN, etc.). For file-sharing-based cluster environments, we recommend using Gigabit or higher Ethernet.

Tiki3D Master Software Installation and Licensing

2.1 Installing Tiki3D Master Software

Trial Version Users:

You may download the latest installation package from:

Tiki3D Website: www.tiki3d.com

Full Version Users:

Please contact Tiki Technologies support staff to obtain the latest installation package.

Installation Instructions:

Double-click the downloaded installation file to run it.

Follow the on-screen prompts to complete the default installation.

For multi-node users:

Please ensure that all your machines are installed with the same version of the software to avoid unnecessary conflicts.

2.2 Tiki3D Master Software Licensing and Updates

2.2.1 Account Registration & License Application

Visit <https://www.tiki3d.com> and complete the basic information to register.

After installing Tiki3D Master, you need to submit an authorization request to obtain a license before you can use the software.

To submit a trial request:

1. Open Tiki3D Activation after installation
2. Fill out the Tiki3D Activation Form.

During the first authorization, you only need to provide the following information:

- a. Organization name
- b. Name
- c. Mobile phone number
- d. Email address

Submit the Tiki3D Activation Form.

3. Download (Right-click, click “save link”) the activation key document from your email (Check spam/junk folder if email is not found in inbox.
4. Double-click on the activation key document (*.WibuCmRaU*) once and you will be prompted upon successful activation
5. You can now open Tiki3D Master software. If you wish to check your software license, open up CodeMeter Control Center.

2.2.2 Trial License Update


Please contact Tiki Technologies staff (support@tiki3d.com) for trial license updates.

2.3 Official Version (CodeMeter) License Configuration

Tiki3D Installation and Codemeter Configuration


During Tiki3D installation, Codemeter will be automatically installed. Open the CodeMeter Control Center after

installation.

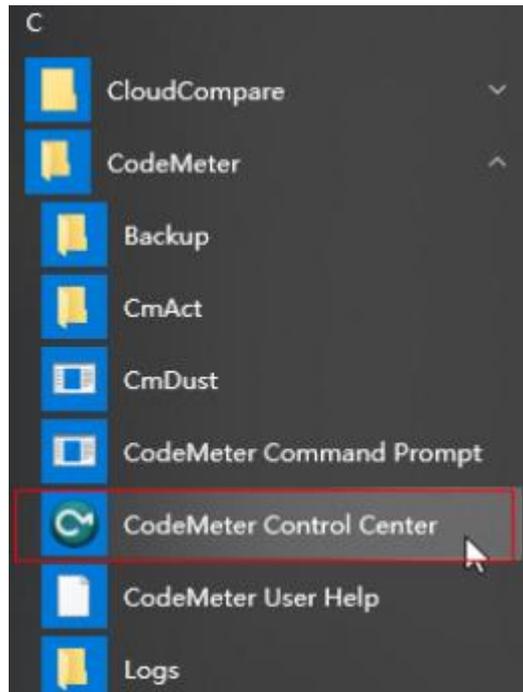

License Dongle Identification:

After inserting the dongle, check it in CodeMeter's web interface. Full version dongles have IDs formatted as 3-*****, which differs from trial licenses.

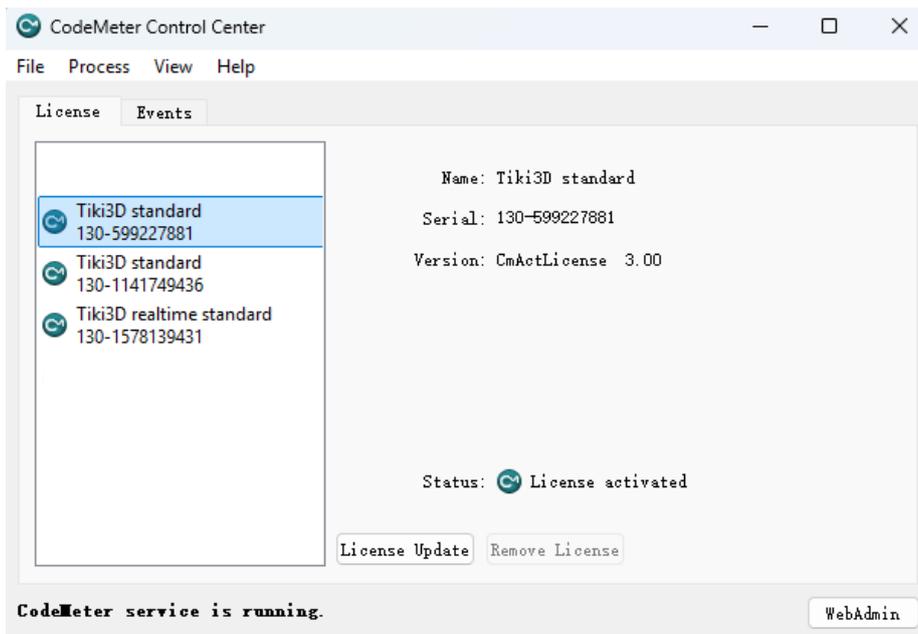


The web interface displays current license expiration date and authorized connections (node count)

Network Configuration (Two Steps):

Step 1: Server Configuration (Dongle Host Machine)



Navigate to: Configuration → Server → Server Access

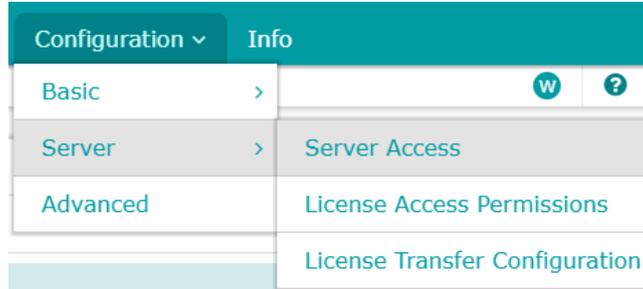

Ensure that:

Network Server: **Enabled**

CMWAN: Disabled

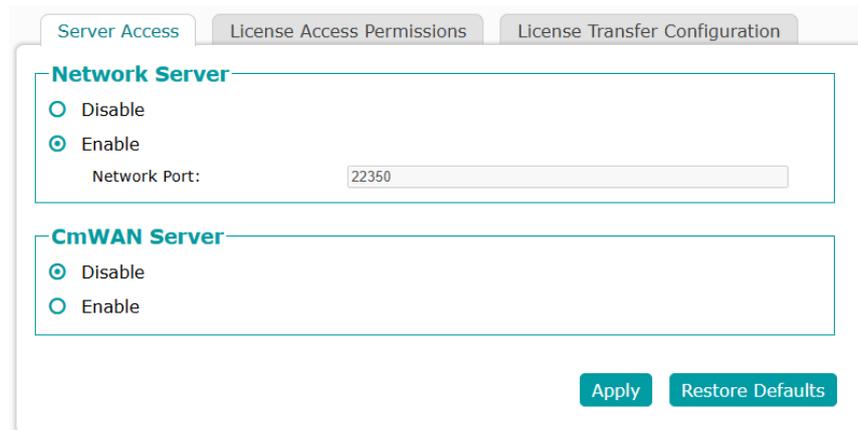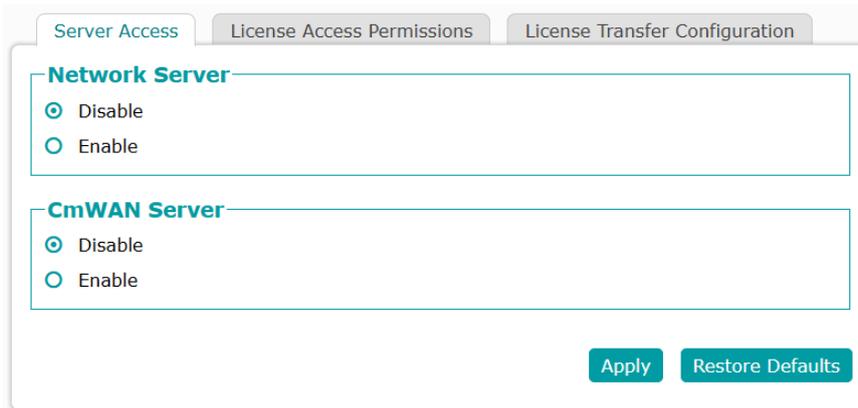

Computers on the same LAN will automatically detect the dongle license service.


The number of concurrent connections depends on the license quantity in the dongle.

Important:

All LAN computers must disable **firewalls** and **antivirus** software

Failure to do so may cause license access issues!

Step 2: Client Machine Setup

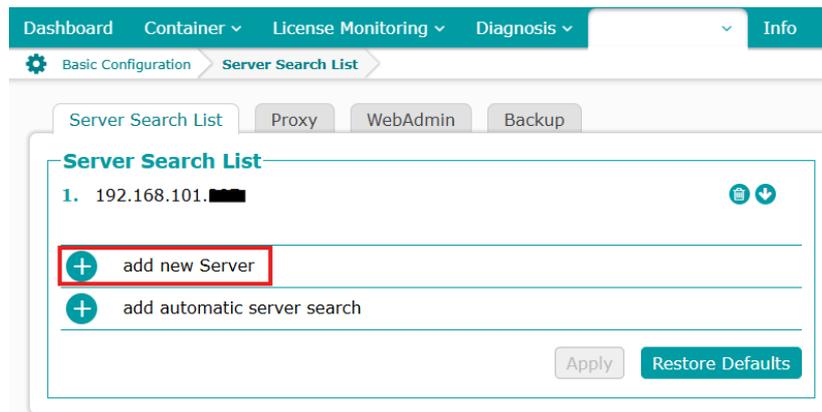


To ensure client machines are properly set up, locate the license server:

1. Open the web interface on the client machine
2. Go to Configuration
3. Remove any existing automatic server detection
4. Select "Add New Server"
5. Enter the host machine's IP address



2.4 Official Version (CodeMeter) License Update

2.4.1 Submitting License Update

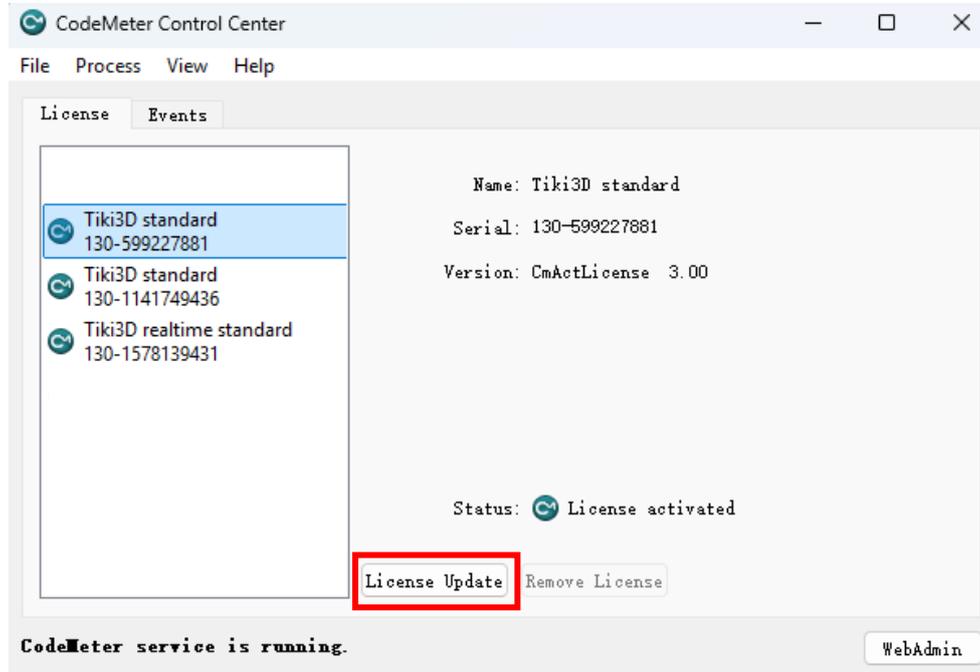

License updates for the hardware dongle are performed using update files. Follow these steps:



- Insert the dongle and open CodeMeter Control Center.
- Click "License Update".
- Proceed to the next step and select "Create License Request".
- Export the generated license request file and send it to the manufacturer for license renewal.

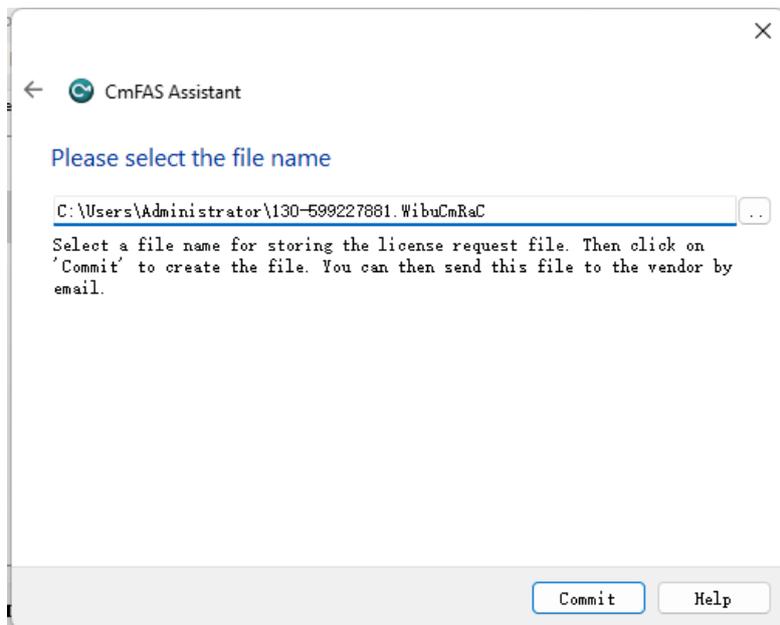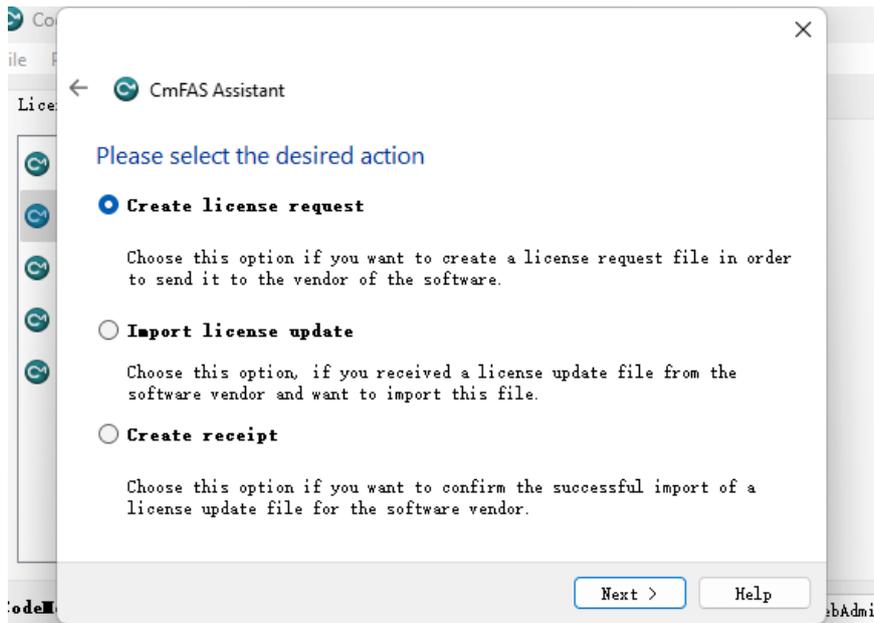

2.4.2 Importing License Update

After receiving the update file from the manufacturer:

- In CodeMeter Control Center, click "License Update"
- Select "Import License Update" this time
- Import the .WibuCmRau file provided by the manufacturer
- Complete the update process

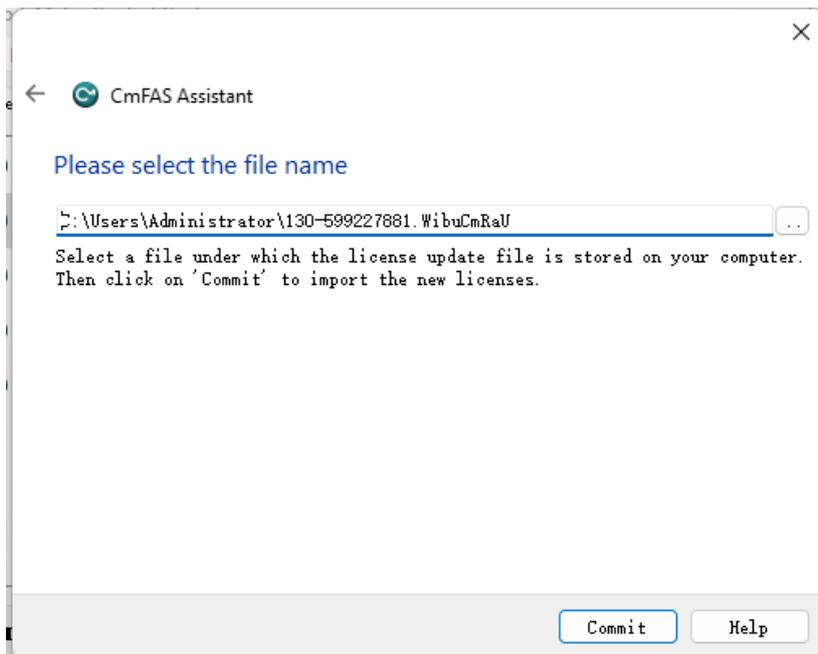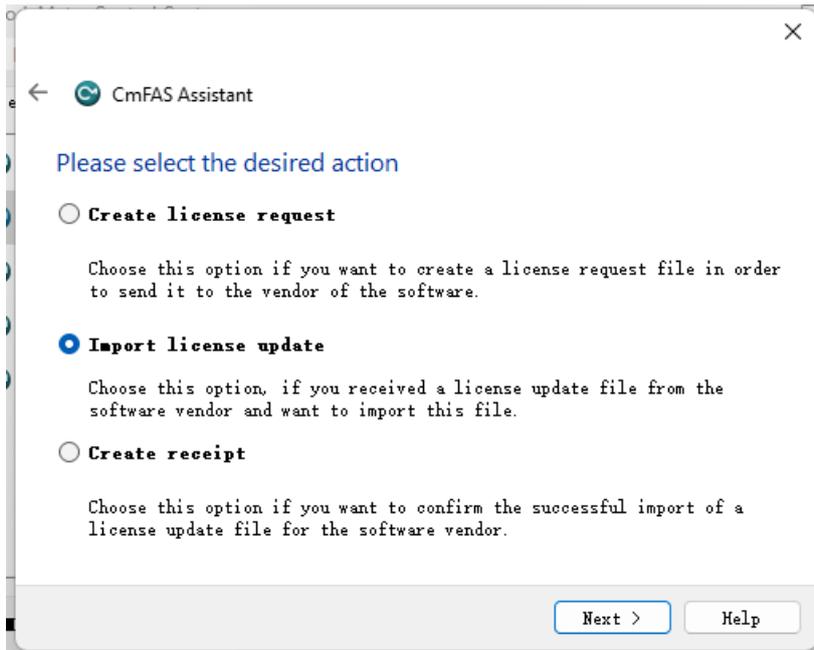

2.5 Official Version (DeepThink) License Configuration


During the installation of Tiki3D DeepThink Edition, the Virbox User Tool will be automatically installed. Please run the Virbox User Tool as an administrator.



After inserting the hardware dongle, you can view it in the Hardware Lock interface of Virbox User Tool. The DeepThink Edition dongle's device information will be displayed in this interface, including the dongle case number, device time, and license quantity.



Click "My Software" to view information such as license start time, license end time, and concurrent connections (node count).

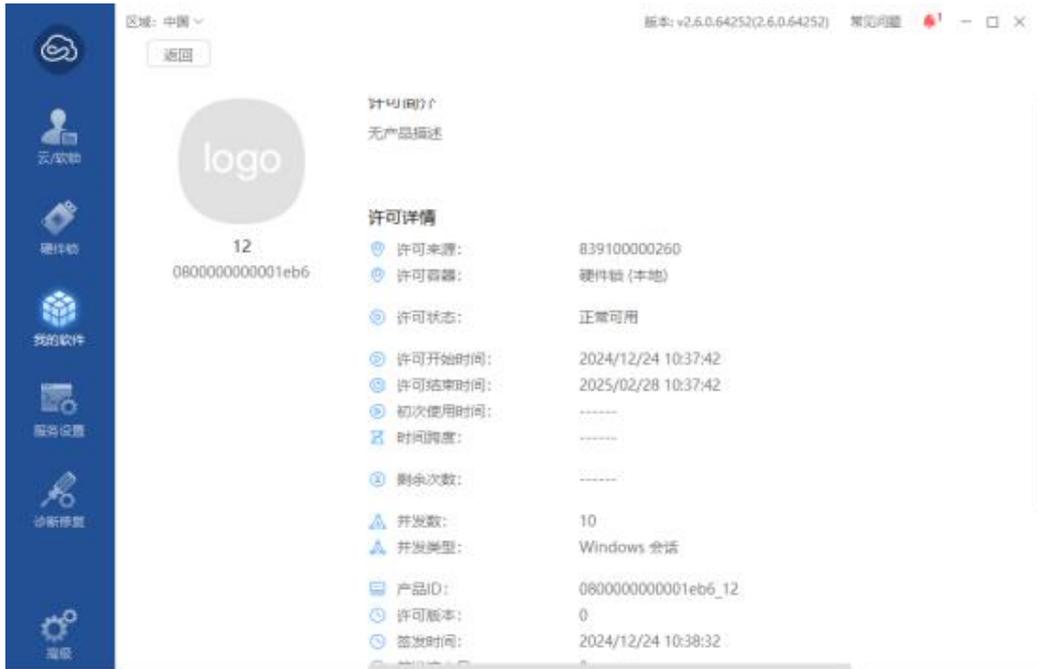

When multiple machines within the same LAN need to perform parallel cluster computing, a network license configuration is required. On the machine with the dongle inserted, open the Virbox User Tool - Service Settings interface.

In this interface, you can view the host name and host IP of the local machine. Set the service mode to "Client/Server Mode", click "Save & Restart", and the server-side service mode will be successfully configured.



If software on the machine with the dongle also needs to use the licenses within the dongle, you need to add the local machine's IP. After adding, the server will also occupy one license node.

In the Service Settings interface - Server Settings, click "Add", enter the IP address, click "OK", then click "Save & Restart".



When there is only one license dongle in the LAN, other nodes generally only need to set the service mode to Client Mode to access the server-side licenses.

However, when multiple license dongles exist in the network, client configuration is required.

After adding the server IP, set the service mode to "Client Mode" and click "Save & Restart".



After configuration is complete, you can test the connection to the service IP in the Service Settings interface.
If the connection is successful, you can test the encrypted software.



Additionally, in Advanced - License Session Tool, click "Advanced" in the upper right corner and check "Network Hardware Lock License Session" to view the current network hardware lock ownership and corresponding host names and IPs.



2.6 Official Version (DeepThink) License Update

For this version's license update, you need to provide the hardware dongle case number and authorization period to the manufacturer. The manufacturer will then send an authorization file for license updates.



After receiving the authorization file:

1. Open Virbox User Tool
2. Navigate to Advanced > Data Packet Upgrade
3. Import the D2C format authorization file



4. Click "Upgrade" to complete the authorization update

5. After updating, you can check the authorization status in the Hardware Lock interface


Tiki3D Master Product System

3.1 Tiki3D Master Main Program

Tiki3D Master is the main module of Tiki3D Reality Modeling Software, primarily responsible for the following tasks:

- Importing datasets
- Defining processing settings
- Submitting job tasks
- Monitoring job progress
- Reviewing processing results


Below is the main interface of the Tiki3D Master Console. All project items can be browsed from the project tree:

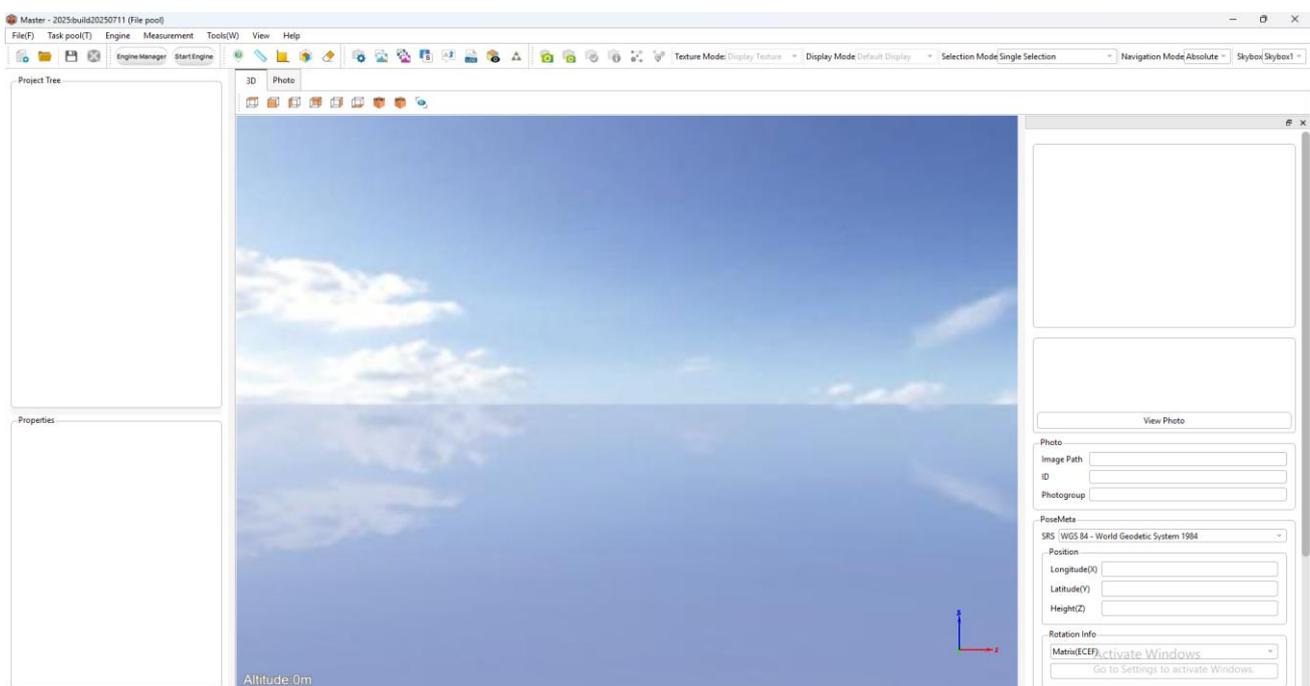

3.2 Tiki3D Engine Node Console

Tiki3D Engine is the computing module of Tiki3D Reality Modeling Software. This module runs in the background without requiring interaction. When there are no computing tasks, the module automatically

fetches and executes queued tasks, with the fetching order determined by task priority levels. A task may be an aerotriangulation task or a 3D reconstruction task.

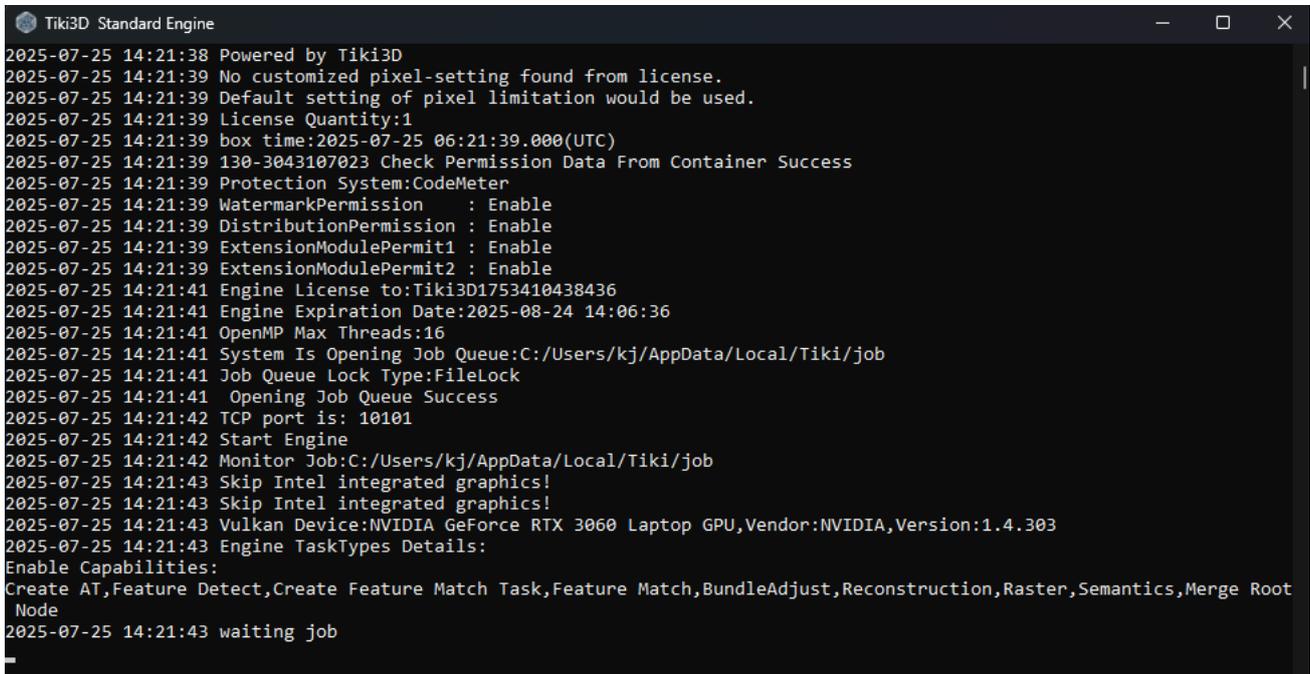

```
Tiki3D Standard Engine
2025-07-25 14:21:38 Powered by Tiki3D
2025-07-25 14:21:39 No customized pixel-setting found from license.
2025-07-25 14:21:39 Default setting of pixel limitation would be used.
2025-07-25 14:21:39 License Quantity:1
2025-07-25 14:21:39 box time:2025-07-25 06:21:39.000(UTC)
2025-07-25 14:21:39 130-3043107023 Check Permission Data From Container Success
2025-07-25 14:21:39 Protection System:CodeMeter
2025-07-25 14:21:39 WatermarkPermission : Enable
2025-07-25 14:21:39 DistributionPermission : Enable
2025-07-25 14:21:39 ExtensionModulePermit1 : Enable
2025-07-25 14:21:39 ExtensionModulePermit2 : Enable
2025-07-25 14:21:41 Engine License to:Tiki3D1753410438436
2025-07-25 14:21:41 Engine Expiration Date:2025-08-24 14:06:36
2025-07-25 14:21:41 OpenMP Max Threads:16
2025-07-25 14:21:41 System Is Opening Job Queue:C:/Users/kj/AppData/Local/Tiki/job
2025-07-25 14:21:41 Job Queue Lock Type:FileLock
2025-07-25 14:21:41 Opening Job Queue Success
2025-07-25 14:21:42 TCP port is: 10101
2025-07-25 14:21:42 Start Engine
2025-07-25 14:21:42 Monitor Job:C:/Users/kj/AppData/Local/Tiki/job
2025-07-25 14:21:43 Skip Intel integrated graphics!
2025-07-25 14:21:43 Skip Intel integrated graphics!
2025-07-25 14:21:43 Vulkan Device:NVIDIA GeForce RTX 3060 Laptop GPU, Vendor:NVIDIA, Version:1.4.303
2025-07-25 14:21:43 Engine TaskTypes Details:
Enable Capabilities:
Create AT, Feature Detect, Create Feature Match Task, Feature Match, BundleAdjust, Reconstruction, Raster, Semantics, Merge Root
Node
2025-07-25 14:21:43 waiting job
```

Opening Tiki3D Engine allows you to view system information.

To shut down the Tiki3D Engine, simply click the close button. Any running tasks will be returned to the task queue, with their status reverting to "Waiting" while maintaining their original priority settings. These waiting tasks will remain in the task sequence and will be processed when the Tiki3D Engine is restarted.

3.3 Tiki3D Viewer

Tiki3D Viewer is the viewing module of Tiki3D Reality Modeling Software. This module is a lightweight visualization software used to view the final results generated by the Tiki3D Master module.

Tiki3D Data Sources

Manned/Unmanned Aerial Vehicle Data

Model quality largely depends on image quality. For building areas, oblique images should generally achieve 2-3 cm resolution; for general areas, 5-6 cm resolution is required. Photos should maintain at least 30 degrees of overlap coverage.

Modeling effectiveness is unrelated to the number of cameras but depends on photo quantity and the time interval between adjacent flight paths.

A nadir camera is not mandatory since true orthoimages are generated from orthographic projections of 3D models. Nadir cameras function similarly to other orientation cameras.

Oblique camera angles between 20-30 degrees are optimal. Cameras set at 45-degree oblique angles produce images with excessively low resolution at the edges.

Tiki3D Aerial Photo Modeling Data Requirements:

- Continuous image overlap should typically exceed 2/3
- Different viewing angles of the same object should maintain less than 15-degree separation

Point Cloud Data/Image Point Cloud Fusion Data

Point cloud data refers to a collection of vectors in a 3D coordinate system. Scanned data is recorded as points, each containing 3D coordinates and potentially other attribute information like color, reflectivity, or intensity. Typically acquired via LiDAR, cameras, or 3D scanners, this data supports 3D modeling, scene reconstruction, robotic navigation, VR/AR applications, etc.

Key characteristics include high precision, resolution, and multidimensional geometric information, enabling accurate representation of object shapes, surfaces, and textures. Processing requires computer vision/graphics techniques like filtering, registration, segmentation, reconstruction, and classification.

Commonly used LiDAR-collected point clouds offer non-contact measurement advantages: rapid acquisition, high precision, and accurate identification - making them essential for mobile robot navigation. Current LiDAR technologies primarily use triangulation or Time-of-Flight (ToF) ranging methods. Triangulation calculates distances by measuring laser dot positions on internal optical sensors.

Acquisition Methods:

Airborne, vehicle-mounted, backpack, or handheld systems

Data Types:

- Synchronously collected point clouds and images

- Fused data from different devices

Remote Sensing Satellite Data

Satellite-mounted sensors capture comprehensive, objective surface feature data that, when processed via specialized remote sensing techniques, becomes georeferenced imagery.

Satellite surveys offer unique advantages: high vantage points, broad coverage, rapid/repeatable data collection, and direct digital output compatible with image processing systems. These "spaceborne eagle eyes" surpass traditional survey methods.

Tiki3D Satellite Modeling Data Requirements:

- Stereopair-capable multi-angle imagery of target areas (minimum 1 stereopair)
- <1m resolution (sub-meter recommended for finer detail)
- Minimal temporal gaps to avoid terrain-change-induced matching failures
- RGB multispectral imagery for true-color representation
- RPC files/parameters accompanying the imagery

Tiki3D Functionality

5.1 Tiki3D Job Path Configuration

When configuring the job path, pay attention to two aspects:



1. The job path set during project submission
2. The job path obtained during engine runtime

For jobs to run properly, these two paths must remain consistent. It is recommended to use Engine Management to make changes.

① Project Job Path


The project job path can be set in two ways:

1. Modify when creating a new project
2. Modify within an existing project

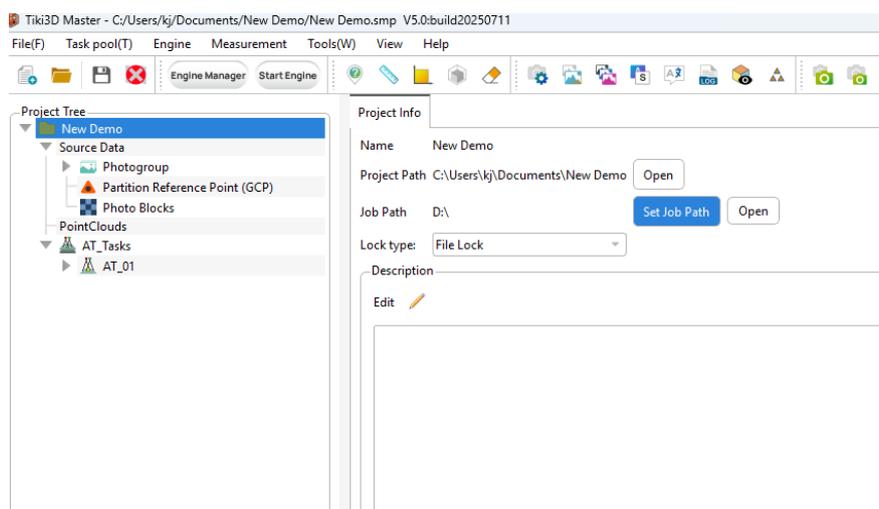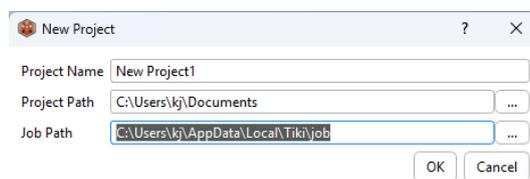

② Engine Job Path

Set in Engine Manager (refer to Online Settings)

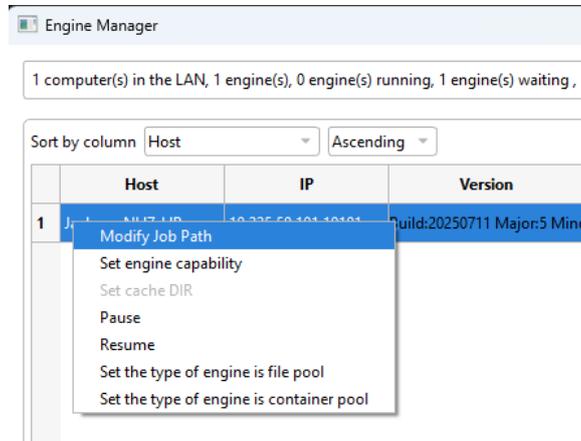

To access the configuration file:


Navigate to C:\Users\Administrator\AppData\Local\Tiki

If the AppData folder is not visible, enable "Show hidden items" in Folder View options.

In the Tiki directory, locate the job-config.ini file to set the computer job queue directory. Simply enter the correct job path in the document.

When the Tiki3D software engine starts, it will read these settings and begin processing jobs from the specified job queue directory.

5.2 Tiki3D Master Main Interface

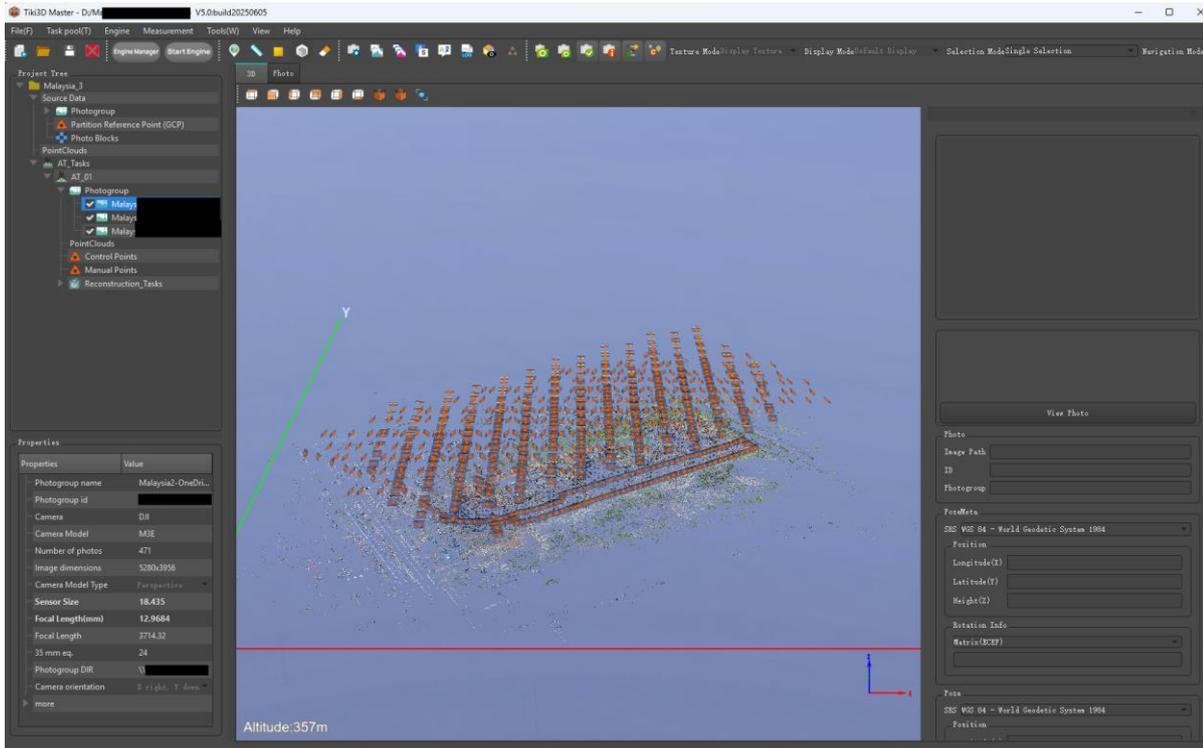

Common Tools Panel

When a function is selected, its corresponding icon will be highlighted. The main functions include:



- ✓ Texture Mode: Toggle texture display on/off
- ✓ Display Settings: Control visibility of aerotriangulation cameras, tie points, and control points
- ✓ Display Mode: Switch between different display states:
 - Point cloud display
 - Wireframe display
 - Normal display

✓ Selection Mode:

- Single selection mode: Click on image to select
- Box selection mode: Draw rectangle to select images
- Polygon camera selection: Draw polygon to select images
- Single tie point selection: Select tie point to associate with related photos
- Box tie point selection: Draw rectangle to select tie point range and display associated photos
- Box control point selection: Draw rectangle to select control points (deletable)

✓ 3D Navigation Mode:

- Fixed rotation axis mode (model rotates along fixed axis)
- Free rotation axis mode (model rotates at any angle)

✓ Skybox Switching: Three built-in background sky options

Project Tree

Project browsing window that manages project items through an intuitive tree structure.

Properties

Project property display interface. Shows different item attributes and project progress for management purposes.


Photos

Main window. Used for browsing photos and adding control points.

3D View

Browsing window. Provides POS points, tie points and 3D model viewing. Supports measurement functionality.

Software Processing Flowchart

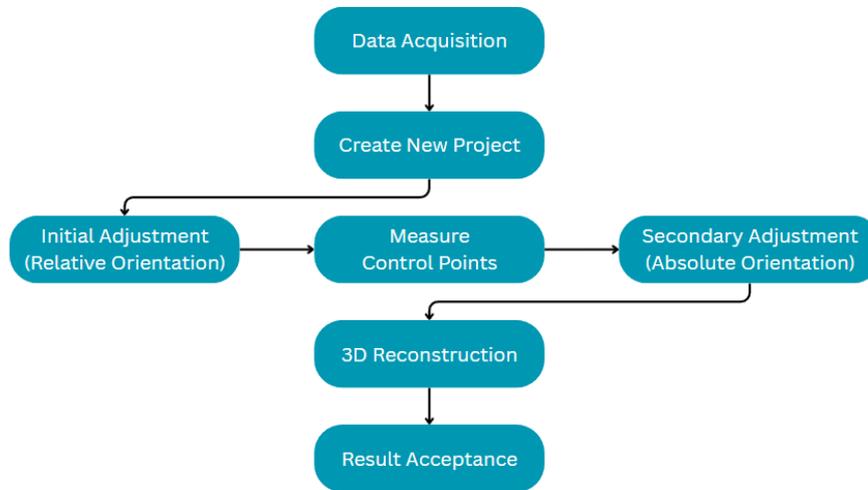

5.2.1 Tiki3D Menu Bar

5.2.1.1 File

New, Open, Save Project.

Open Recently Used Projects. 

5.2.1.2 Task

Create Aerotriangulation Task: Create a new aerotriangulation computation task.

5.2.1.3 Measurement

For details, refer to Section 6.3 Measurement.

Coordinates 

Obtain the coordinate information of the mouse-clicked position, with the freedom to select the coordinate system.

Distance

Obtain the straight-line distance and elevation difference between two points.

Area

Obtain the surface area and perimeter of a selected region.

The surface area is determined by the projection of the selected 3D contour onto the average plane of the contour points.

Volume

Obtain the volume defined by the difference between a reference plane and the 3D model.

The volume is determined by the sampled elevation differences between the reference plane and the 3D model mesh.

Cut Volume refers to the volume of the 3D model portion above the reference plane.

Fill Volume refers to the volume of the 3D model portion below the reference plane.

Clear

Clear all previous measurement states.

5.2.1.4 Tools

Camera Parameters

Manage saved camera parameters, including adding, importing, exporting, and deleting camera parameters.

Engine Manager

Used to manage and monitor the status of all engines, including host name, engine address, computer usage, project directory, task queue path, engine status, engine capabilities, cache directory, etc. Supports directly modifying the task queue path and configuring engine aerial triangulation in the engine management interface. For details, refer to Section 7.2 Engine Management.

Image Format Conversion

Used for converting photos between JPG and TIFF formats.

Photo Group Consistency Check

Used to check whether there are rotated photos in the photo group. If any are detected, the photos need to be rotated to the correct orientation.

Specific Scenes

Used to store specific scenes and viewpoints.

Language Settings

Used to set the software interface language. Currently supports switching between Chinese and English.

Open Master Log

Click to view the file that records Master, engine-side, and browser operation events, which can help identify the cause of errors.

Pop Up 3D View

Click to open a 3D view window that runs parallel to the Master interface. The 3D window and 2D list are synchronized in real time, eliminating the need to switch back and forth between 2D and 3D windows.


Start Engine

Click to quickly launch the engine-side application.

5.2.1.5 Tiki3D Toolbar

Camera Parameters

Obtain/Add to Camera Database – Used to store camera parameters, allowing users to customize and apply camera settings based on their needs.

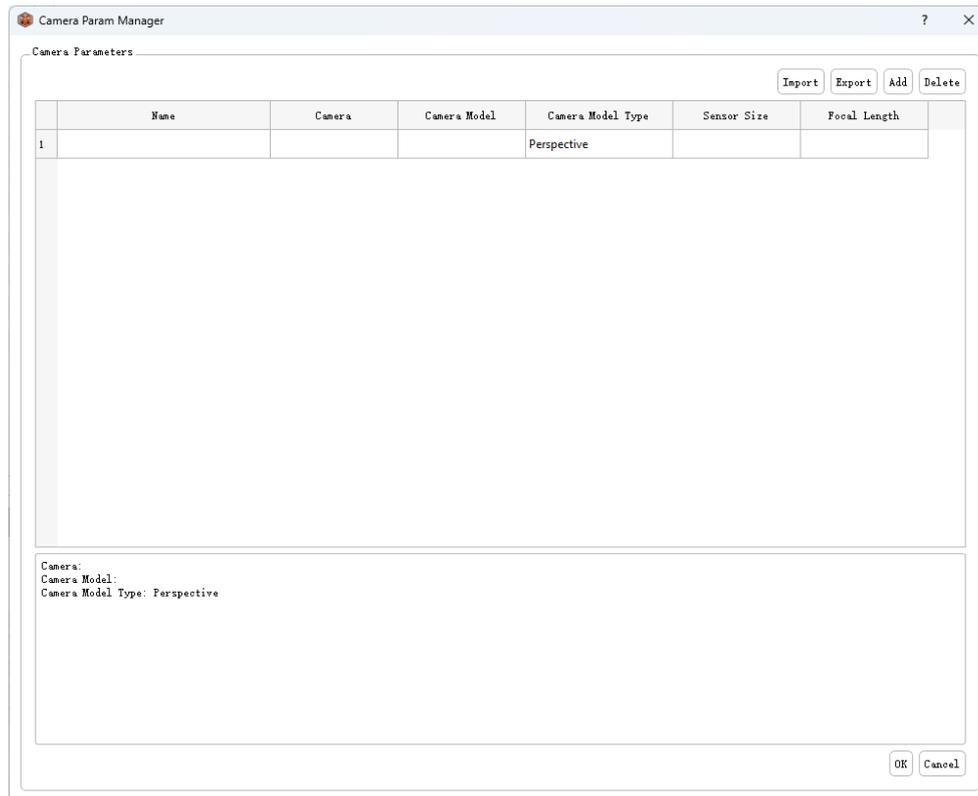

Import

Import existing camera parameter files. Currently, only Tiki3D's proprietary .bin format is supported.

Export


Export existing camera parameter files. Currently, only Tiki3D's proprietary .bin format is supported.

Add

Add existing camera parameter files to the camera library.

Usage Instructions:


1. **Click "Add"** and manually enter the parameters from the camera report into the corresponding fields in Tiki3D's camera parameter settings.

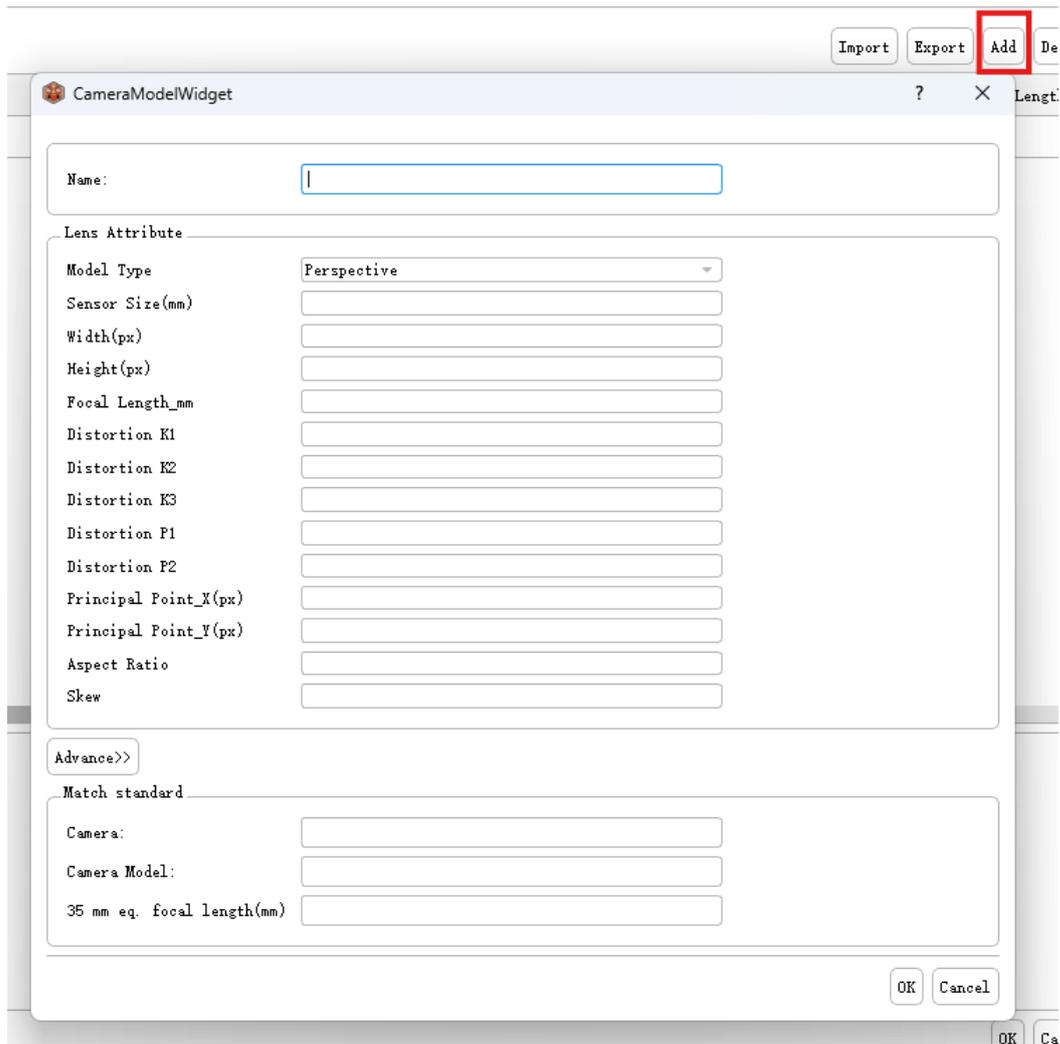

- a. Fill in all available parameters; leave unspecified fields as default.
- b. Set a **Camera Name** for identification.
- c. Click "**OK**" to save the new camera parameters to the library.
- d. Repeat the process for different lenses.

2. To apply camera parameters:

- a. Right-click on the desired **photo group** and select "**Import Camera Parameters.**"

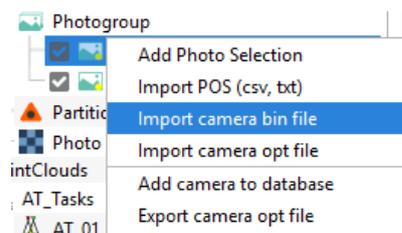

tasks are located.

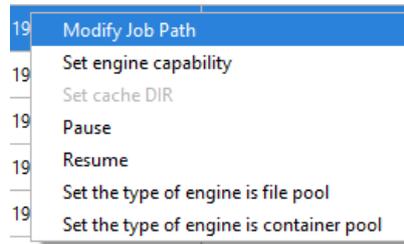


Figure 52



Figure 53

Task Lock Types

- **Folder Lock**
- **Distributed Lock**

File Lock vs. Directory Lock (Folder Lock)

- For standard Windows file systems, use the default **File Lock**.
- For special file systems (e.g., NAS servers), try **Folder Lock**.

Note on Directory Lock Scope:

- The **Folder Lock** applies to the **Job System task queue path**.
- When setting a **Folder Lock** for the first time on a task queue path:
 - **Do not start the Engine** immediately.
 - Wait until the **Master** finishes the configuration before launching the Engine.
- Upon startup, the Engine will display whether it is using **File Lock** or **Folder Lock**—ensure the correct type is selected.

```
2025-06-10 10:12:38 System Is Opening Job Queue:D:/job
2025-06-10 10:12:38 Job Queue Lock Type:FileLock
2025-06-10 10:12:38 Opening Job Queue Success
2025-06-10 10:12:39 TCP port is: 10101
2025-06-10 10:12:39 Start Engine
```

After the modification, the engine interface will automatically switch to the target path.

```
2023-12-24 19:15:23 Engine Expiration Date:
2023-12-24 19:15:23 OpenMP Max Threads:16
2023-12-24 19:15:23 System Is Opening Job Queue:C:/job
2023-12-24 19:15:23 Job Queue Lock Type:FileLock
2023-12-24 19:15:23 Opening Job Queue Success
2023-12-24 19:15:23 TCP port is: 10101
2023-12-24 19:15:23 Start Engine
2023-12-24 19:15:23 Monitor Job:C:/job
2023-12-24 19:15:23 Skip Intel integrated graphics!
2023-12-24 19:15:23 Skip Intel integrated graphics!
2023-12-24 19:15:23 Vulkan Device:NVIDIA GeForce RTX 3060 Laptop GPU, Vendor:NVIDIA, Version:1.3.194
2023-12-24 19:15:23 Engine TaskTypes Details:
Enable Capabilities:
Create AT,Feature Detect,Create Feature Match Task,Feature Match,BundleAdjust,Reconstruction,Raster,Semantics
2023-12-24 19:15:23 waiting job
2023-12-24 19:16:21 Change locktype to FileLock
Command:Set Job Dir to C:/job2023 success
2023-12-24 19:16:21 Job Queue Lock Type:FileLock
2023-12-24 19:16:23 Job Queue Lock Type:FileLock
2023-12-24 19:16:23 Engine TaskTypes Details:
Enable Capabilities:
Create AT,Feature Detect,Create Feature Match Task,Feature Match,BundleAdjust,Reconstruction,Raster,Semantics
2023-12-24 19:16:23 Change Job Dir: C:/job2023
```

Figure 55

Task Types

Tiki3D Engine fetches two types of tasks:

- **Aerotriangulation (AT) Task:** Created by submitting an AT block.
- **Reconstruction Task:** Created by submitting a reconstruction production project.

Task Sequence

Tiki3D Engine retrieves tasks for processing from the task sequence folder under the task queue path. The task sequence folder contains the following subfolders:

- Cancel
- Complete
- Failed
- jobcache
- locks
- NodeMachine
- Pending
- Running
- tmp

Figure 56

- **Canceled:** Contains tasks canceled by the user.
- **Completed:** Contains successfully finished tasks.
- **Nodes:** Contains all engine nodes associated with the current task path.
- **Failed:** Contains tasks that failed during processing.
- **Pending:** Contains tasks waiting to be processed. This subfolder includes three priority-level

subfolders: **Low**, **Medium**, and **High**, indicating task priority.

- **Running**: Contains tasks currently being processed.


The task sequence can be managed directly via **Windows File Explorer**:

- **Cancel a waiting task**: Move the task file from **Schedule (Low/Medium/High)** to **Canceled**.
- **Cancel a running task**: Move the task file from **Running** to **Canceled**.
- **Change task priority**: Move the task file between **Scheduled (Low/Medium/High)**.
- **Restart a task**: Move the task file from **Canceled** or **Failed** to **Running**.
- **Clear failed or canceled tasks**: Delete task files from **Failed** or **Canceled**.
- **Clear completed tasks**: Delete task files from **Completed**.

Setting Engine Capabilities

During parallel AT computation, Tiki3D randomly selects a host for the adjustment step. To ensure high-performance machines handle critical calculations, the software allows configuring **engine capabilities** per node, restricting engines to specific functions.

In the Engine Manager interface, right-click the target engine and select **Set Engine Capabilities**.

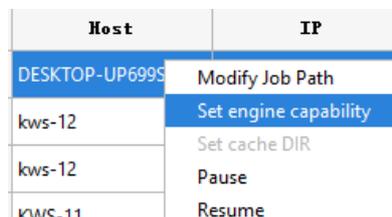

The screenshot shows a table with two columns: 'Host' and 'IP'. The table contains four rows of data. A context menu is open over the second row, listing several actions: 'Modify Job Path', 'Set engine capability', 'Set cache DIR', 'Pause', and 'Resume'. The 'Set engine capability' option is highlighted in blue.

Host	IP
DESKTOP-UP699S	
kws-12	
kws-12	
kws-11	

Figure 57

The engine capabilities (**A**, **F**, **Mt**, **M**, **B**, **Re**, **Ra**) correspond to:

- **A**: AT Creation
- **F**: Feature Extraction
- **Mt**: Image Similarity Calculation
- **M**: Feature Matching
- **B**: Bundle Adjustment
- **Re**: 3D Reconstruction
- **Ra**: Raster Operations

Unchecking a capability prevents the engine from executing that step.

- **Image Similarity Calculation (Mt)** and **Bundle Adjustment (B)** are single-machine computations; others support clustering.
- **Bundle Adjustment** requires significant memory. Low-memory hosts should disable this option to avoid out-of-memory errors.

Pause/Resume

Pauses or resumes tasks on the current node.

- **Pause:** Stops the currently running task, which is automatically returned to the task queue.

Specific Scenes

Stores camera positions and orientations of a 3D scene for quick viewpoint restoration.

- **To add a scene:** Import coordinates from measurements.

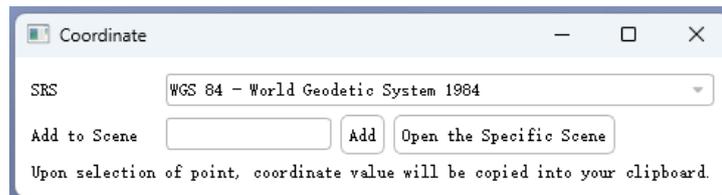


Figure 58*

- **To use:** Double-click a saved scene to instantly switch to its viewpoint.

5.2.1.5.1 Displaying and Exporting Log

Display Error Log

When issues occur during aerotriangulation (AT) and modeling, you can quickly locate calculation errors by displaying the error log.


To view the log, right-click on the failed AT task or tile and select "Show Log." If you are unable to determine the cause of the error, you can send a screenshot of the log to technical support for assistance. If the log cannot be displayed, you can choose to export the log file to seek technical support.

Export Log

If displaying the log does not help identify the error, the technical support team may request the user to export the calculation log file. Users can choose to export the log to seek technical support.

Note: The log file cannot be opened or viewed locally. Users need to provide it to our technical support team for analysis.

Method: Right-click on the failed AT task and select "Export Log." The software will package the relevant log files into a compressed archive, which the user can then provide technical support for assistance.

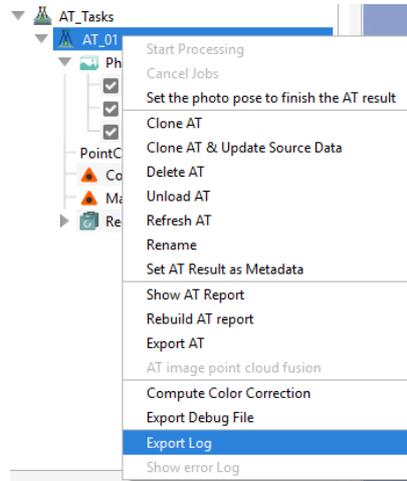

5.2.1.5.2 Coordinate File Modification

During data processing, it is often necessary to customize a coordinate system. The steps to create a custom coordinate system file are as follows.

1. Obtain a Similar .prj File

First, acquire a .prj file that closely matches the target coordinate system. You can export one from **Kanjing Smart3D** by right-clicking on a coordinate system with a similar ellipsoid and central meridian.

This file will serve as a base for further modifications.

2. Modify Ellipsoid and Projection Parameters

Adjust the ellipsoid and projection parameters by editing the fields highlighted in red in the file.

Figure 60

The image shows a modified coordinate file where the central meridian has been updated. Save the changes in .prj format.

3. .prj File with Seven-Parameter Transformation

When using a local urban coordinate system, you may need to include the corresponding **seven-parameter transformation** in the file.

- a. Add a line in the following format:

```
TOWGS84[dx, dy, dz, rx, ry, rz, scale]
```

where:

- i. **dx, dy, dz** = Coordinate shifts (translation)
- ii. **rx, ry, rz** = Rotation angles (in arc-seconds)
- iii. **scale** = Scale factor (in parts per million)

Example:

```
TOWGS84[100, 200, 300, 1.5, 2.5, 3.5, 0.999999]
```

Save the modified file in .prj format for use in your project.

5.2.1.5.3 Texture Mapping Enhancement Tool

If texture distortion occurs in a specific tile of the 3D model, you can optimize it by selecting the tile and enabling the **"Visibility Detection"** option under **"Reset Task"** with the **"Enhanced"** setting.

Steps:

1. Select the problematic tile in the model.
2. Right-click and choose **"Reset Task."**
3. Set **"Visibility Detection"** to **"Enhanced"** for optimization.

This process helps correct texture misalignment and improves visual quality. If issues persist, further manual adjustments or reprocessing may be required

5.2.2 Tiki3D Master Project Tree

5.2.2.1 Project Name

The **Project** function is used to manage project-related information, including project and project paths, image path updates, and importing aerotriangulation (AT) data. A detailed description of the project can be entered in the **Project Info** section.

Modifying Project Path

The project path can be modified within the project.




Importing Aerotriangulation (AT) Data

New projects support importing AT files in:


- **Universal formats** (e.g., .xml)
- **Tiki3D proprietary format** (.at)

Multiple AT files can be imported in a single operation.

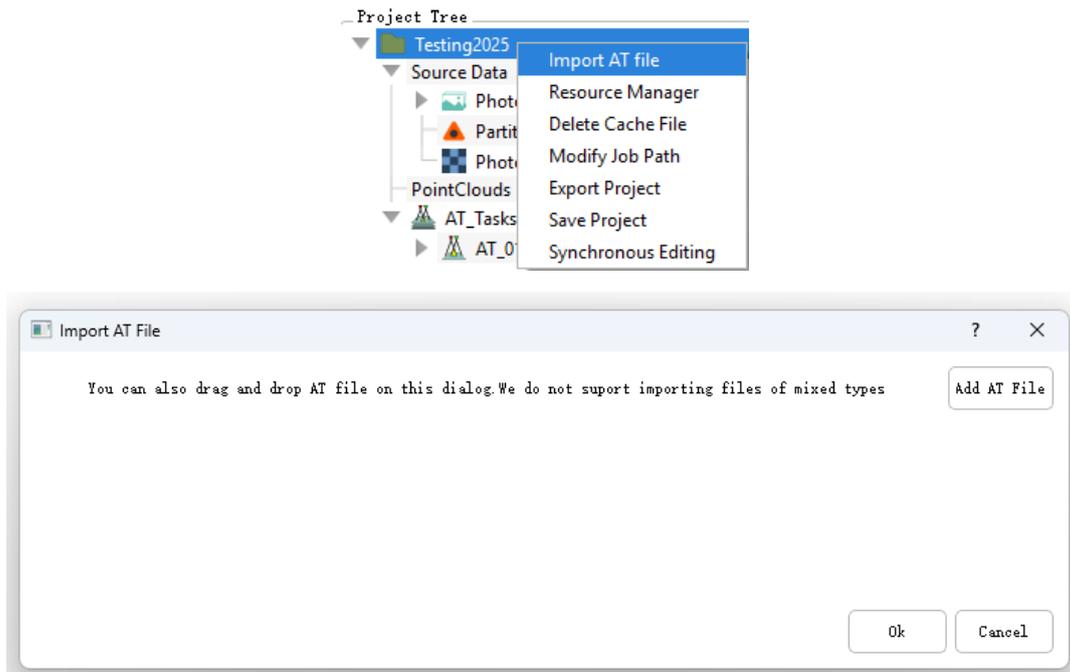


Opening the Resource Manager

Right-click on the project and select **Resource Manager** to access the **Image Source Management** interface.

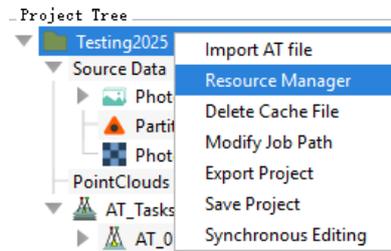

Updating Path Status


- Use **Update Status** to check the accessibility of all images in the list.
 - **Accessible paths** (correct) require no changes.
 - **Inaccessible paths** (marked as "Not Found") must be corrected.

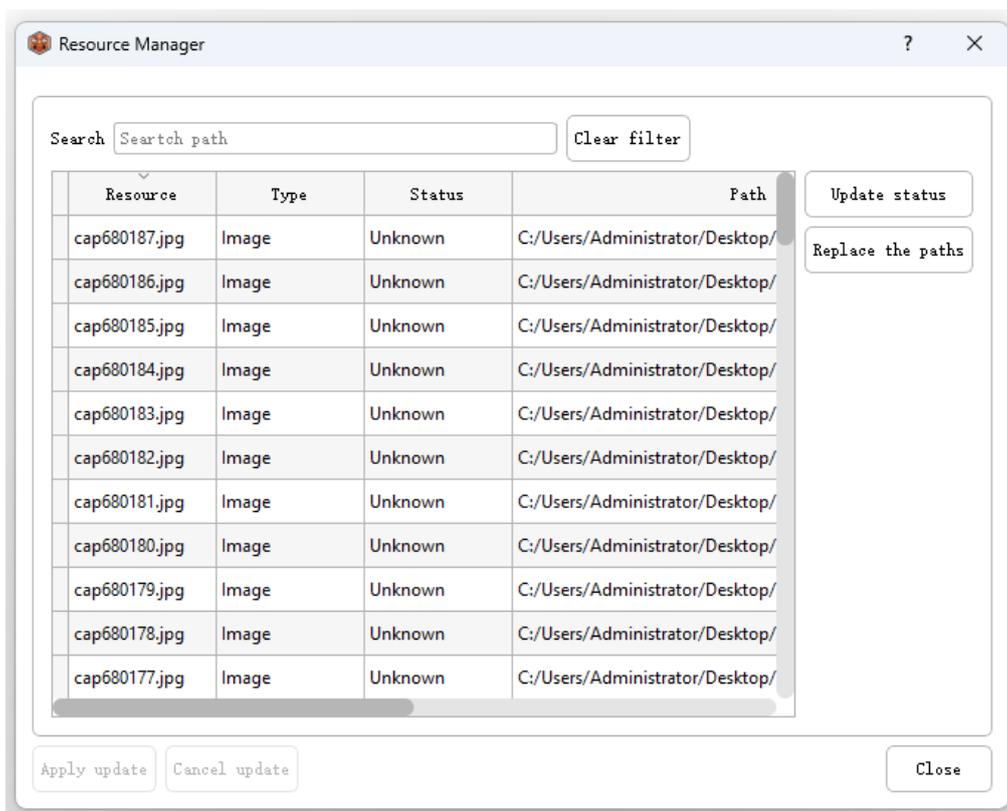

Modifying Incorrect Paths


1. **Double-click** a path to copy it.
2. Select **Replace Path**.

- a. In **Find**, paste the incorrect path.
 - b. In **Replace with**, enter the correct path.
3. Click **Replace** to confirm.

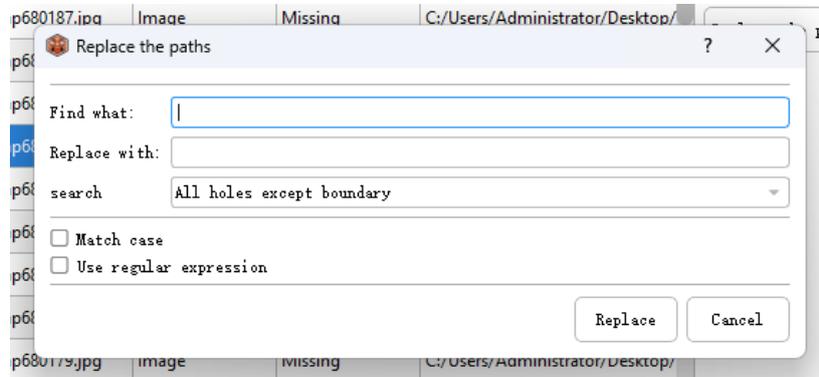

4. After all corrections, click **Update Status** again to verify all paths.
5. Click **Apply Update** to save changes.


Exporting a Project

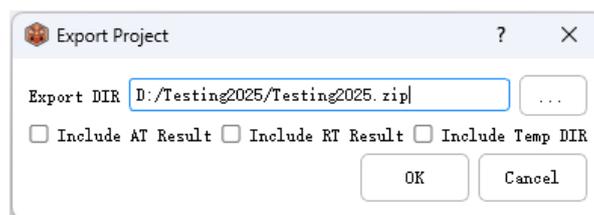

Export the project as a compressed file, with optional inclusions:

- AT results
- Reconstruction results
- Temporary directories

Deleting Cache Files


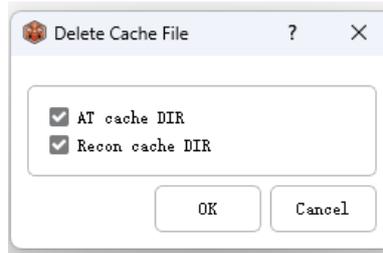


Clears temporary files generated during processing with a single click. Cache files include:

- **AT cache files**
- **Reconstruction cache files**

⚠ **Note:** Deleting cache files will require reprocessing from scratch.

Modifying Task Queue Path

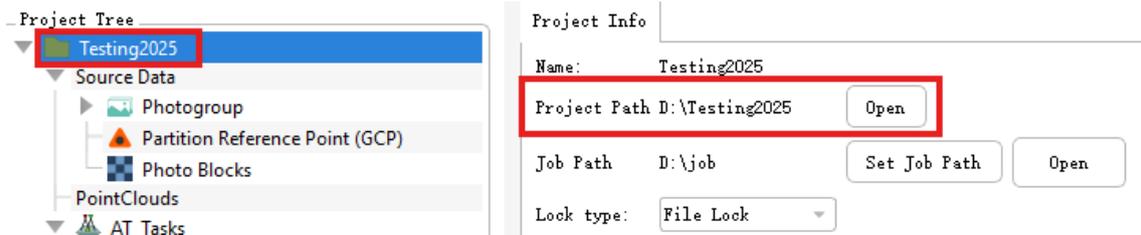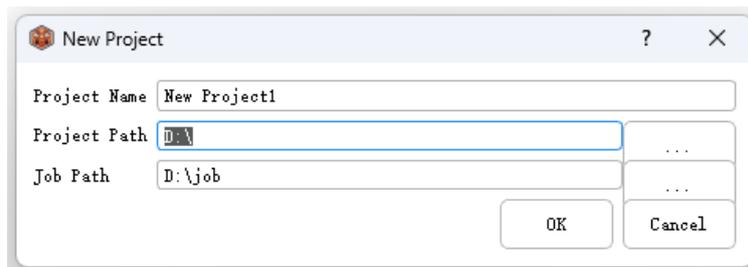

The task queue path can be set in two ways:

1. During project creation.
2. Within an existing project.

5.2.2.2 Original Photos

5.2.2.2.1 Photo Groups

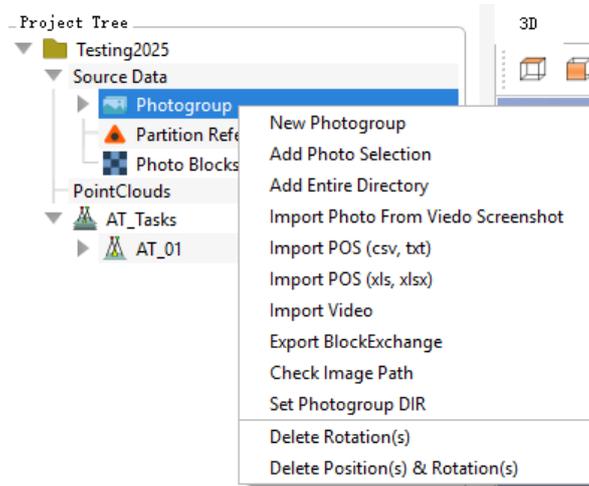


Photo Groups are used to manage one or multiple sets of images and their attributes.

Creating a New Photogroup

Create a new photogroup to add images.

Importing Photos

- Add Photo Selection, support multiple-selection (**Shift**) or select all (**Ctrl+A**).
- Import all supported image formats from the selected folder.

Importing Photogroups

- When importing all images from a directory, they are automatically assigned to different photo groups based on their folder structure, with the group name matching the folder name.
- If images within the same folder have different attributes (e.g., camera parameters, image dimensions), they will be automatically sorted into separate groups.

Importing POS Files

- Import image positioning and orientation data from a file.
- **Requirement:** Image names within the photo group must be unique. If duplicates exist, use the method of assigning a POS file to each photo individually.

Importing Excel Files

- Import an Excel (.xlsx) file to retrieve image and related metadata.

Importing Videos


- Import video file paths and set a frame extraction interval. The software will extract keyframes for 3D model generation.
- **Supported formats:** .mp4, .wmv, .avi, .mov, and .flv.

Exporting BlockExchange

- Export an aerotriangulation (AT) file containing only the original image data, POS information, and camera parameters.
- **Supported formats:**
 - **.at format** (Tiki3D proprietary, recommended for faster import/export and smaller file size).
 - **.xml format** (universally compatible with third-party software).

Check Image Path

- Verify the correctness of image paths in the photo group. Two modes are available:
 - **Quick Check** – Verifies only if the images exist (faster, does not check for corruption).
 - **Deep Check** – Validates image integrity (slower but detects damaged files).
- If invalid or corrupted paths are found, they can be deleted in bulk from the report or corrected via the **Resource Manager**.

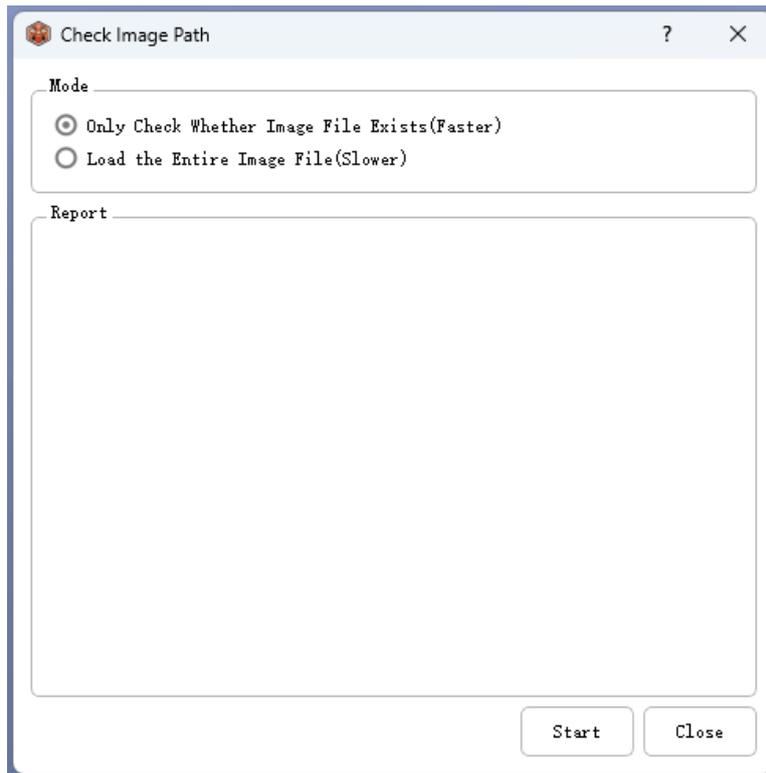

Set Photogroup Directory

- Reassign the photo group directory. It is recommended to modify image paths via the file explorer.

Deleting Rotation Data

- Remove image rotation (attitude) information while retaining position data. Useful when rotation data is incorrect.

Deleting Position and Rotation Data

- Clear all position and rotation information from the images.

5.2.2.2.2 Partition Reference Points (Control Points)

Adding Control Points

- Add individual control points manually.

Importing Control Points

- Import control point files in **TXT/CSV** format.

Importing BlockExchange Format Control Points

- Supports importing control point files in **XML format** exported from **ContextCapture** software.

Importing Tiki3D Control Points


- Supports importing control point files in **XML format** exported from **Tiki3D** software.

5.2.2.2.3 Photo Block Division


When processing large datasets, operators often need to divide photos into blocks. Tiki3D supports direct block division and merging of large-area data within the software.

Creating a New Photo Block

1. Photos are displayed in the 3D interface. Under **Original Photos** in Tiki3D, right-click **Photo Block Division** and select **Create New Block**.
 - a. **Note:** All photos must have POS data. Photos without POS information cannot be selected for blocking.

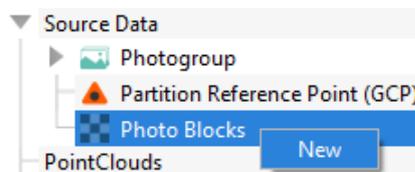


2. Rename the new block (e.g., "Block 1-1") and select a display color. Click **Next**.

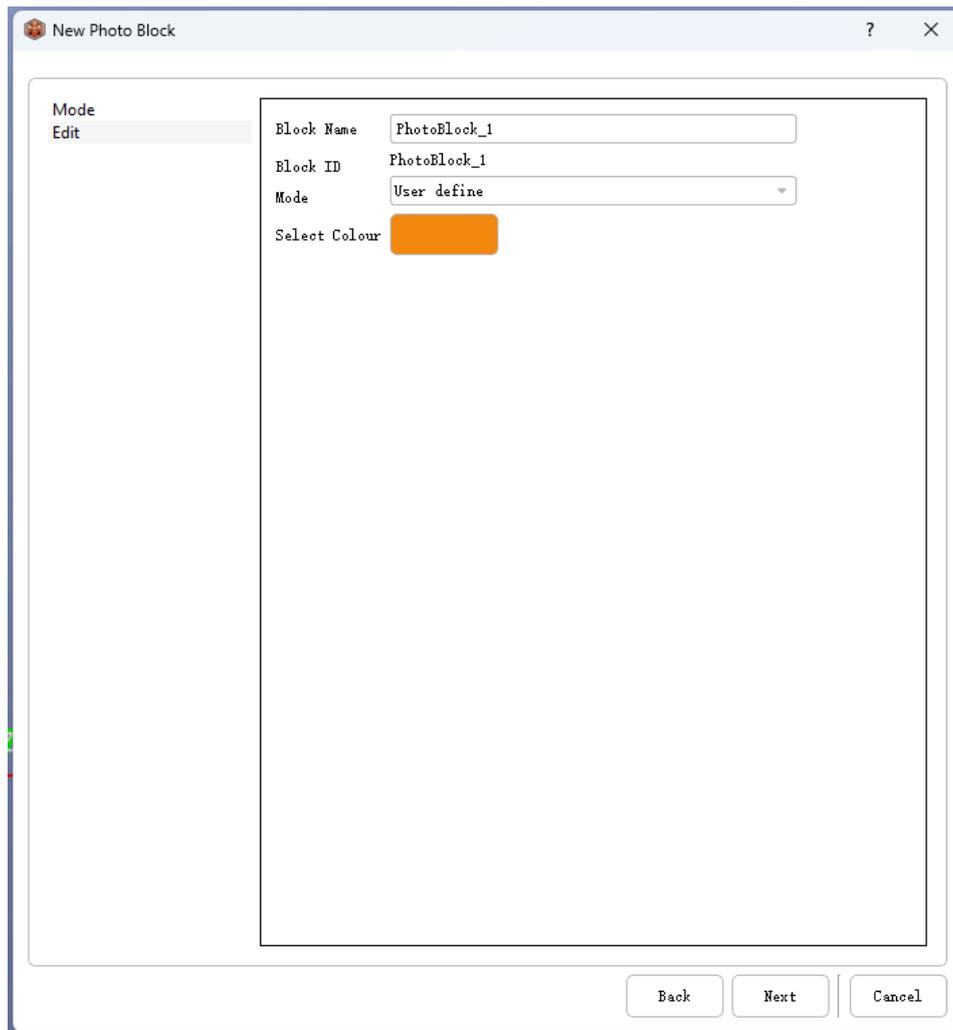


3. Rotate the 3D view by holding the **left mouse button** to adjust the perspective for data selection.


Selecting Photos for Blocking

- In the 3D view, click **Select Photos** to choose POS data.
- **Selection Methods:**
 - **Rectangular selection**
 - **Polygonal selection** (switch modes in the selection toolbar)

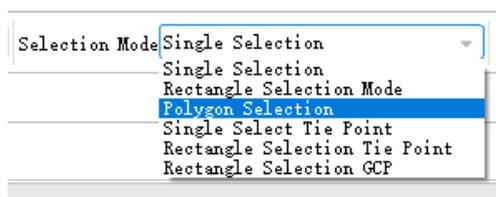

- Hold **Shift + Left-Click** to rotate the current view. Selected photos appear in the right panel, with the count displayed in the top-left corner.

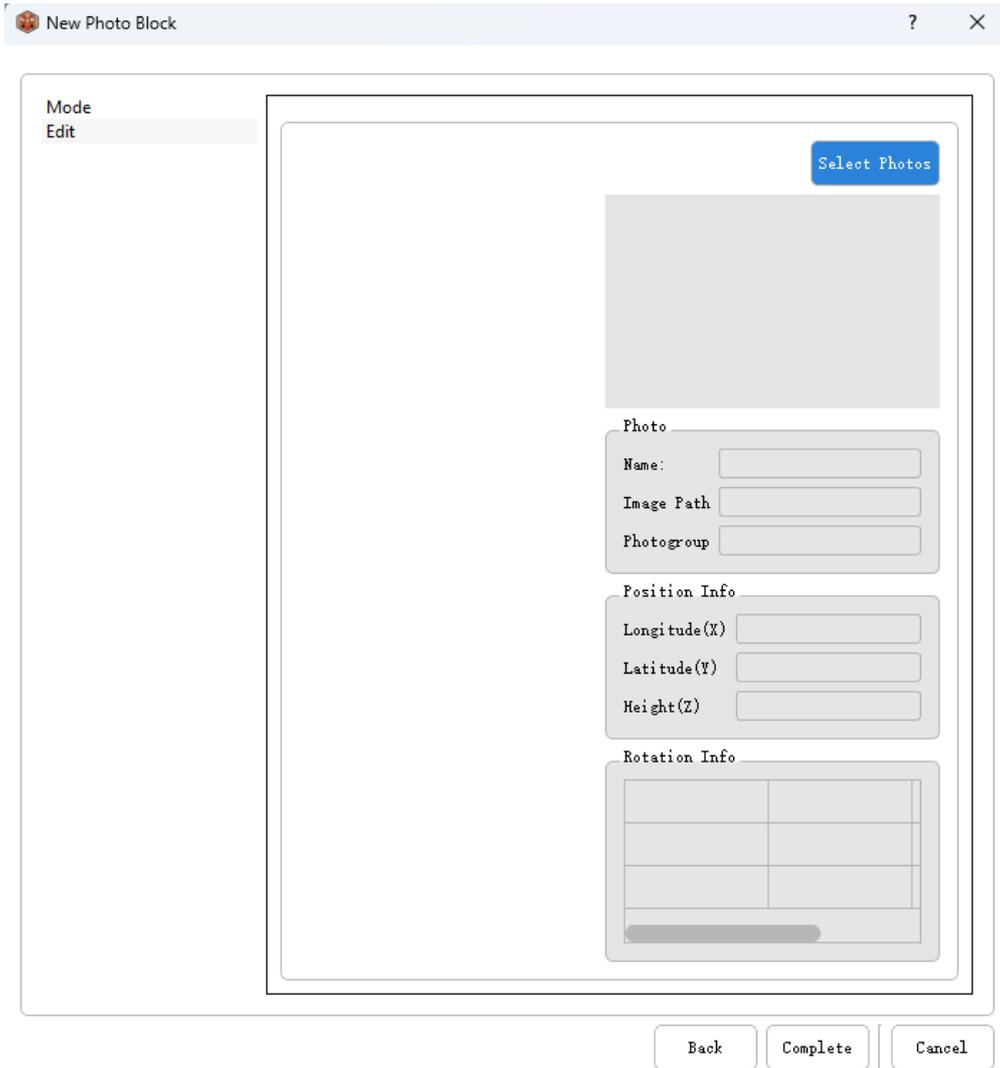

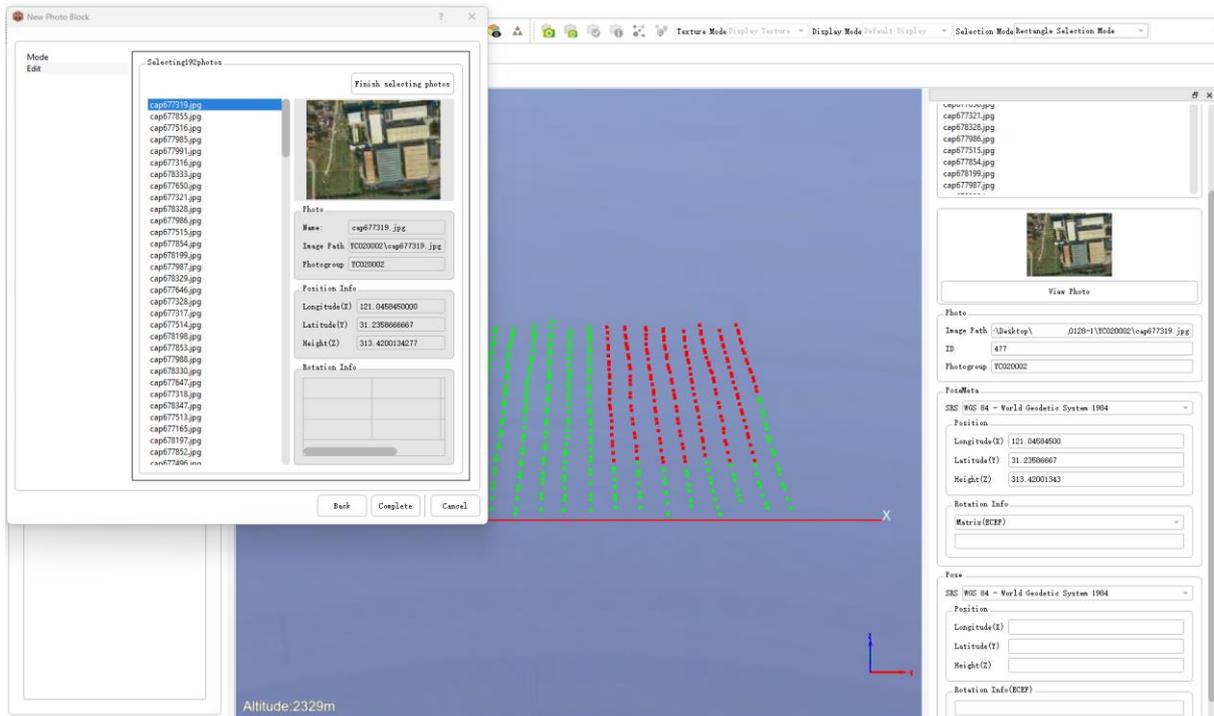


4. Click **Finish** to create the new block.

Dividing Remaining Data

- Repeat the process to divide the remaining data into blocks.
- **Key Considerations:**
 - Maintain **overlap** between adjacent blocks.
 - Ensure overlapping areas contain **at least three control points**.

Aerotriangulation (AT) for Divided Blocks


- When multiple blocks are created, you can run AT on individual blocks.
(Refer to **Figures 76 & 77**)

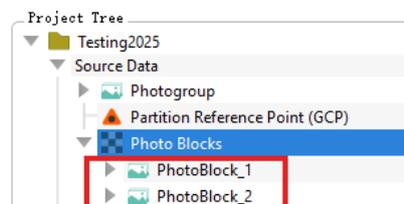

Merging Blocks

1. After completing AT for all blocks, merge them into a single AT task:

- a. Right-click the selected AT tasks and choose **Merge**.




2. Color Consistency Adjustment:

- a. Merged blocks may exhibit color differences. Tiki3D provides **color harmonization** to ensure tonal uniformity across the entire survey area.
- b. Right-click the merged AT task and select **Color Consistency Adjustment** to apply corrections.

5.2.2.3 Point Cloud Collection

The point cloud import function supports importing both **static point clouds** and **dynamic point clouds**. These can be integrated with aerial images for combined 3D reconstruction or used independently for point-cloud-based modeling.

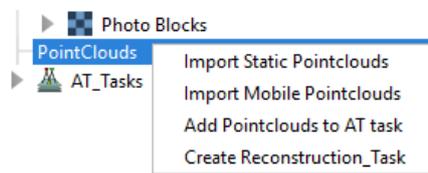

Importing Static Point Clouds

- **Definition:** Point clouds captured when both the object and scanning device are stationary (e.g., tripod-mounted laser scanners).
- **Supported Formats:** E57, LAS, PLY.

Importing Dynamic Point Clouds

- **Definition:** Point clouds captured while the scanning device is in motion (e.g., backpack, handheld, airborne, or vehicle-mounted scanners).
- **Supported Formats:** E57, LAS.
- **Requirement:** Trajectory files must be provided for processing.

Adding Point Clouds to Aerotriangulation (AT)

- Merge point cloud data with photo-based AT results for **integrated 3D reconstruction**.


Creating a Reconstruction Task

- Perform **point-cloud-only reconstruction**, where geometry and textures are derived solely from the point cloud data.

5.2.2.4 Aerotriangulation Task

5.2.2.4.1 AT Task Options

After submission, AT tasks display the following actions:

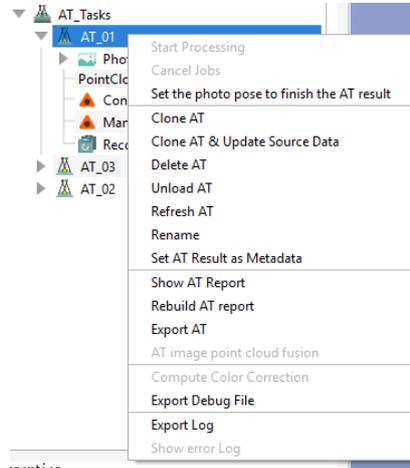

Operational Options:


- **Start Processing:** Begin AT processing. Settings can be adjusted in the pop-up dialog.
- **Cancel Job:** Terminate the AT task.
- **Clone AT Task:** Duplicate the task for modifications without altering the original.
- **Clone AT & Update Source Data:** Duplicate the task and refresh image data if the photogroup is updated.
- **Delete AT Task:** Remove unnecessary tasks.
- **Unload AT:** Reduce memory usage by unloading (data remains stored; reload to resume).
- **Refresh AT:** Update task info if display errors occur.
- **Rename:** Modify the task name (no impact on calculations).
- **Set AT Results as Metadata (POS Data):** Copy the task and assign computed positions as initial data for a new AT run.
- **Show/Rebuild AT Report:** Check or update the accuracy report.
- **Export AT:** Save AT outputs in .xml format.
- **AT image point cloud fusion**
- **(Compute Color Correction) Color Consistency Adjustment:** Harmonize color discrepancies

between merged AT blocks.

- **Export Debug File:** Export debugging files for software troubleshooting.
- **Export Log:** Generate logs for technical analysis if AT fails.
- **Show Error Log:** Review processing details to diagnose AT failures.

5.2.2.4.2 AT Task Properties

The properties panel displays submission parameters and real-time attributes:

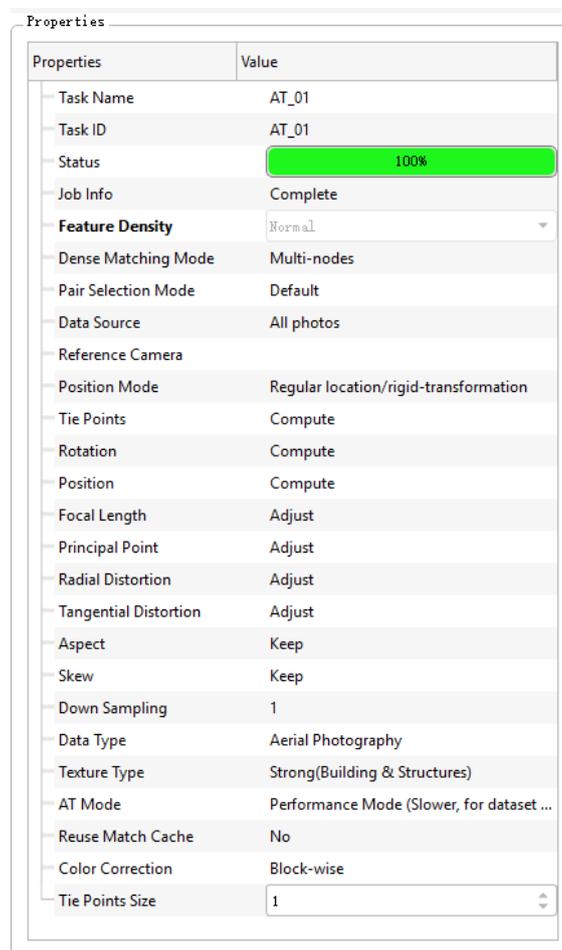

Properties	Value
Task Name	AT_01
Task ID	AT_01
Status	100%
Job Info	Complete
Feature Density	Normal
Dense Matching Mode	Multi-nodes
Pair Selection Mode	Default
Data Source	All photos
Reference Camera	
Position Mode	Regular location/rigid-transformation
Tie Points	Compute
Rotation	Compute
Position	Compute
Focal Length	Adjust
Principal Point	Adjust
Radial Distortion	Adjust
Tangential Distortion	Adjust
Aspect	Keep
Skew	Keep
Down Sampling	1
Data Type	Aerial Photography
Texture Type	Strong(Building & Structures)
AT Mode	Performance Mode (Slower, for dataset ...)
Reuse Match Cache	No
Color Correction	Block-wise
Tie Points Size	1

Key Attributes:


- Task Name: Editable label.
- Task ID: Unique identifier (non-editable).
- Status: Progress bar.

- Current Phase **(Job Info)**: Active processing stage.
- Feature Density: Tie point density selected for AT.
- Dense Matching Mode: Cluster or standalone computation.
- Pair Selection Mode: Method for selecting image pairs.
- Data Source: Full photo set or specific blocks.
- Reference Camera: Camera model used.
- Position Mode
- Tie Points/Position/Rotation/Focal Length/Principal Point: Calculation methods for respective parameters.
- Lens Distortion: Radial/tangential distortion models.
- Aspect Ratio/(Skew) Angle: Sensor calibration settings.
- Down Sampling (Factor): Image resolution reduction ratio.
- Data Type: Input data category.
- Texture Type: Texture handling options.
- AT Mode: Processing configuration.
- Reuse Match Cache: Optimization for repeated calculations.
- Color Correction **(Consistency)**: Toggle for color harmonization.
- Tie Point Size: Display scale for 3D tie points.

5.2.2.5 Reconstruction Task


5.2.2.5.1 Reconstruction Task Options

The reconstruction task options are shown below:

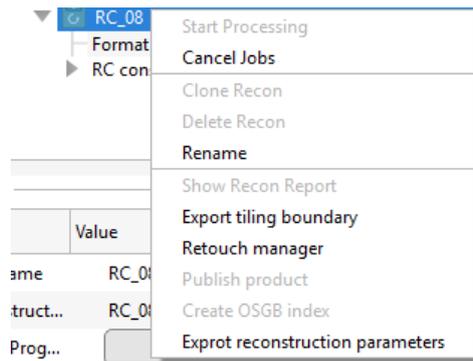

Available operations for reconstruction tasks:

- **Start Processing:** Begins the reconstruction process. A dialog box will appear after submission, allowing for setting adjustments.
- **Cancel Job:** Terminates the reconstruction task.
- **Clone Reconstruction:** Duplicates an existing reconstruction task.
- **Delete Reconstruction:** Removes unnecessary reconstruction tasks.
- **Rename:** Renames the current reconstruction task without affecting project calculations.
- **View (Show) Reconstruction Report:** Displays the reconstruction results report.
- **Export Tile Boundaries:** Exports boundary lines for all tiles, including:
 - Completed tiles
 - Failed tiles
 - Pending tiles
 - Unsubmitted tiles

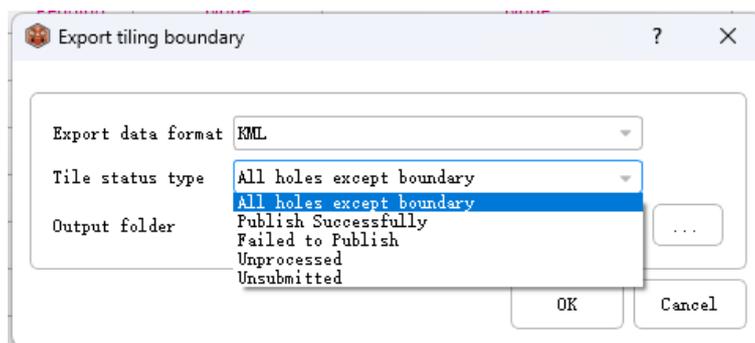

- **Modeling Management 2:** Refreshes AT task information. If data display is incorrect, this function reloads the AT task for proper visualization.
- **Publish Results:** Supports export in multiple formats:
 - OSGB, OBJ, DAE, 3DTiles, 3MX, LAS
 - Esri i3S, SuperMap S3M, FBX
 - Google Earth 3D KML
 - DOM/DSM
- **Generate OSGB Index:** Creates an index file for quick model access.

5.2.2.5.2 Reconstruction Task Properties

The properties panel displays all parameters set during reconstruction submission. For detailed parameter descriptions, see **Section 5.3.5.1: Reconstruction Parameter Settings**.

Properties	
Properties	Value
Task Name	RC_08
Reconstruct...	RC_08
Recon Prog...	<div style="width: 30%; background-color: #00FF00; border: 1px solid #ccc;"></div> 30%
AT_Tasks	AT_01
Published T...	
X Min(m)	227674.3485622508
X Max(m)	227976.3843090150
Y Min(m)	229116.0825201163
Y Max(m)	229388.3407674460
Z Min(m)	5.1567487996
Z Max(m)	28.6896549193
Tile size	62.5
Tiling Mode	Planar Grid
Geometric...	Low
Pairs	Normal
DenseMat...	Normal
DenseMat...	General
Product Type	I3S
Product SRS	EPSG:4326+3855
SRS Origin ...	
SRS of Tiling	EPSG:32648
SRS origin o...	
Tile Count	33.74
Tiles of	20
Texture Qua...	90
Inter-tile Co...	Enabled
Optimize ha...	No
Auto Water...	No
Texturing M...	Default
Enable Den...	Yes
Geometry ...	0
Texture Mip...	0
Output Pro...	Open Product Directory
Recon Cach...	D:/ /Project/RC/AT_01/Cache
Image Pyra...	D:/ Project/IP


Key Features:

- Centralized view of reconstruction configuration
- Direct access to parameter documentation
- Real-time verification of processing settings

5.3 Tiki3D Master Workflow Guide

5.3.1 Creating a New Project

1. Open **Tiki3D Master**.
2. Click **File** → **New Project** or the *New Project* icon .
3. Enter a project name and specify:
 - a. **Project Path**
 - b. **Job Path**
4. Click **Confirm**.

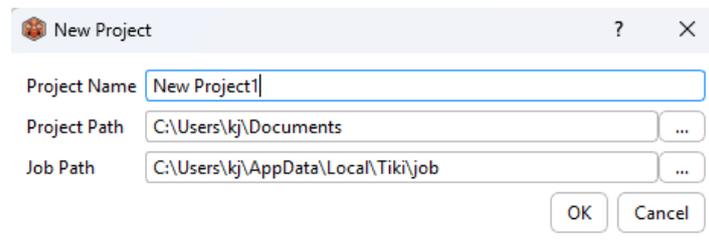

Job Path Notes:

- Stores task runtime files (small size but requires high disk I/O speed).
- Defaults to C:\; recommended to use an **SSD** (avoid storing on the same disk as the project).

Project Structure (Post-Creation):

- **Project Name:** Represents a single dataset but supports multiple AT/reconstruction tasks.
- **Photogroups:** Interface for creating/importing photos, POS data, and editing camera parameters.
- **AT Tasks:** Perform calculations, add control points, and review adjustment reports.
- **Reconstruction Tasks:** Generates textured 3D mesh models after successful AT.

5.3.2 Image Loading

After project creation, import:

- **Images**
- **POS data**


- **Camera parameters**

Three Import Methods:

1. **Import Photos** (Slow but verifies integrity; generates thumbnails).
2. **Import XML AT File** (Fast but requires manual photo validation).
3. **Import Excel Sheet** (Fast but lacks auto-validation).


5.3.2.1 Importing Photos

Right-click *Photogroup* → **Add Photo Selection** or **Add Entire Directory** (shown below).

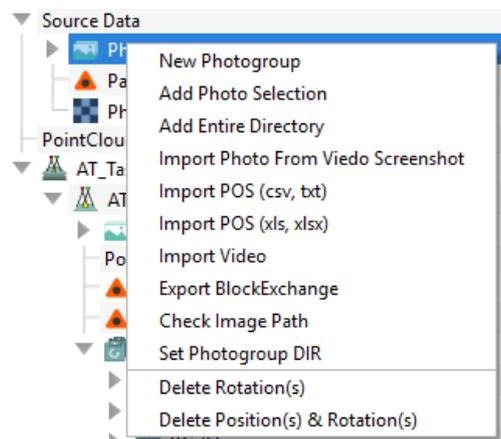

Options:


- **New Photogroup:** New group setup.
- **Add Photo Selection:** Single/multiple images.
- **Add Entire Directory:** Entire folder (auto-organizes by subfolder names).
- **Import Photo from Video Screenshot:** Single/multiple images from video clip.
- **Import POS (csv, txt):** Matches POS data to images (1:1 required).
- **Import POS (xls, xlsx):** Bulk import via formatted .xlsx.
- **Import Video:** Extracts keyframes (supports .mp4, .wmv, .avi, .mov, .mpg, .flv).
 - Set extraction interval/output directory.

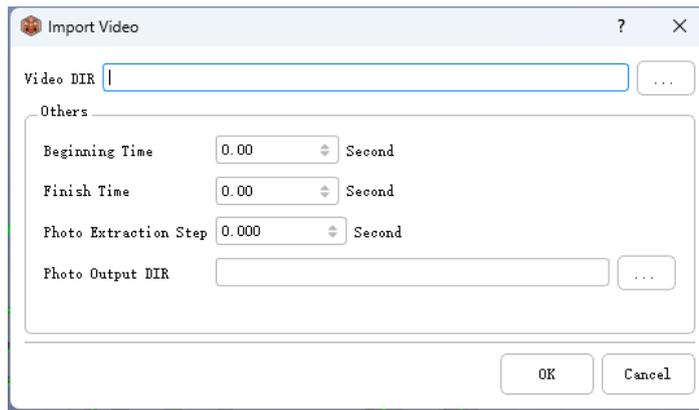

- **Export BlockExchange:** Generates .xml with images, POS, and camera data (no tie points).
- **Check Image Paths:** Validates paths; use *Path Manager* to fix errors.
- **Set Photogroup Directory:** Reassign paths (bulk or individual).
- **Delete Rotation(s):** Removes orientation-only.
- **Delete Position(s) & Rotation(s):** Clears all POS data.


GNSS Height Reference:

- If images lack geotags → Ignore.
- If geotagged → Select ellipsoid/vertical datum.

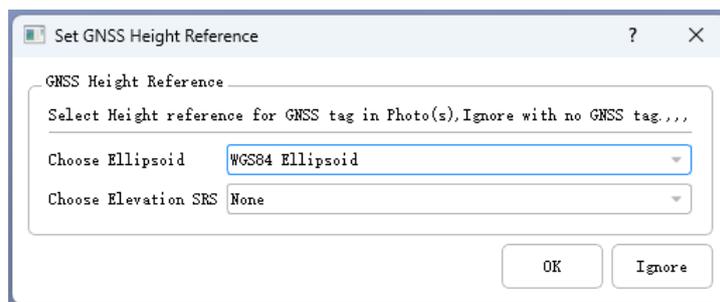

5.3.2.2 Importing POS Files

Right-click *Photo Group* → **Import POS**.

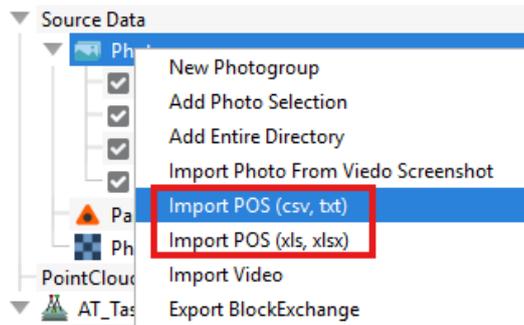



Modes:

1. **Single POS File:** Covers all photos (no duplicate names allowed).
2. **Per-Group POS Files:** Individual files for each group.


Steps:

1. Select a delimiter and skip header lines (if any).

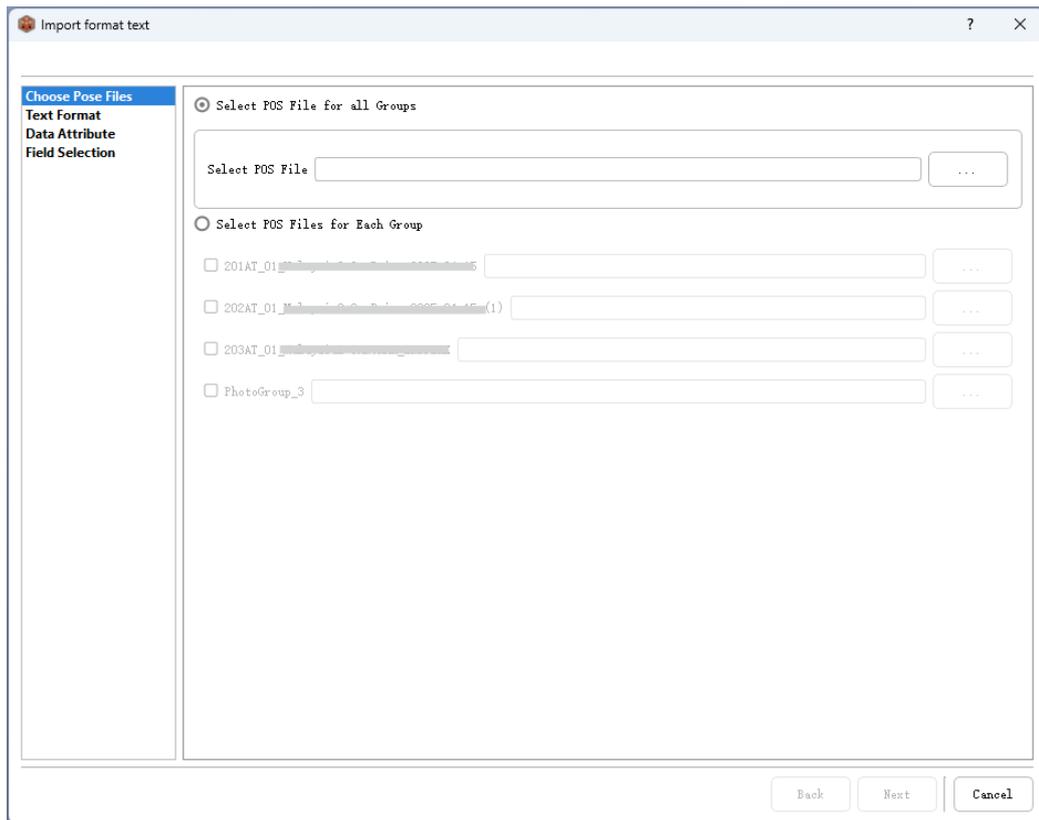


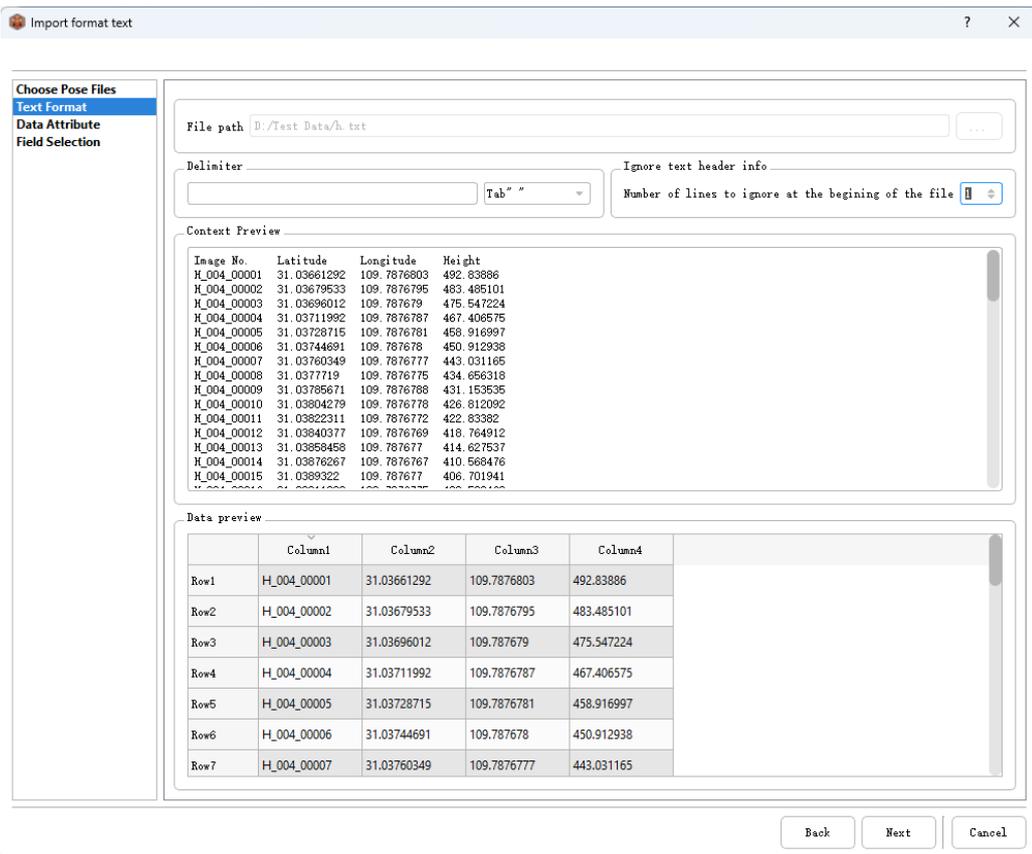


2. Choose coordinate system (default: WGS84).
3. Enable *Import Camera Attitude* if available (set angle format).

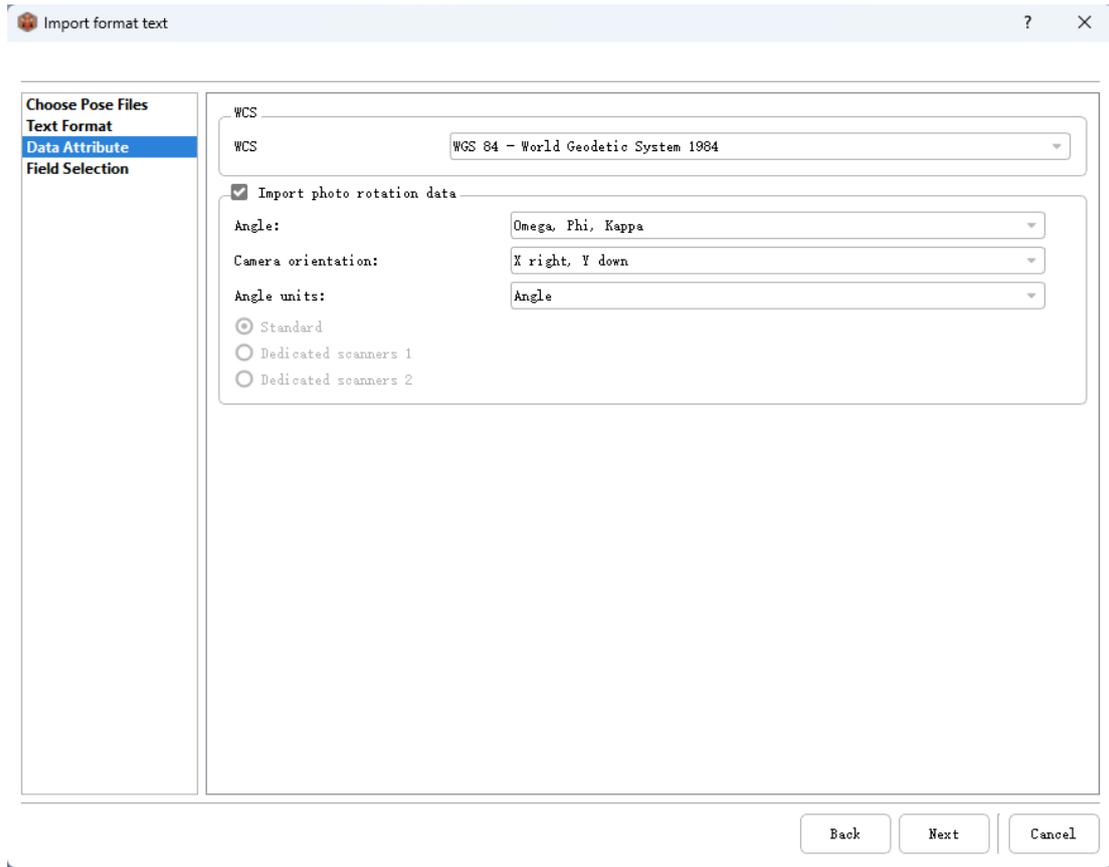

4. Map columns to fields (ensure correct order).

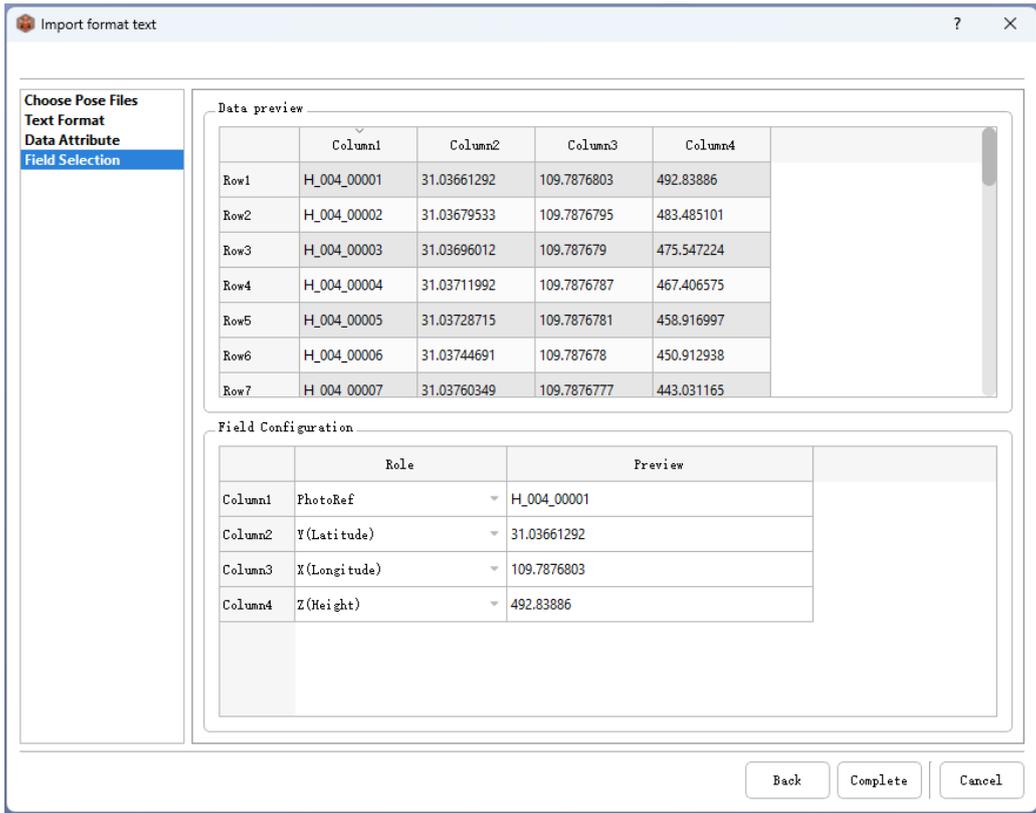

View POS Data: Toggle display via red-circle button.

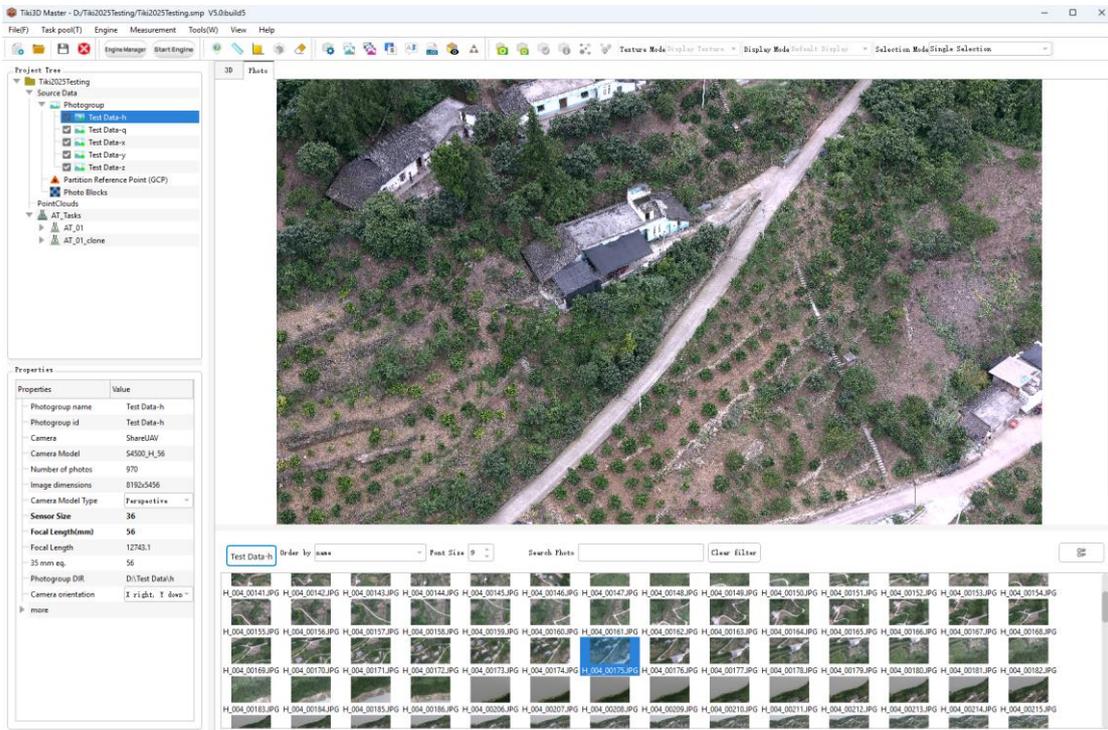

Test Data: h Order by: name Font Size: 9 Search Photo: Clear filter

ID	Name	Camera	Camera Model	Focal Length(mm)	POS Meta	Pose
99	H_004_00099.JPG	ShareUAV	S4500_H_56	56.00000000	✓ Longitude(X):109.787, Latitude(Y):31.0416, Height(Z):320.356; Yaw...	None
98	H_004_00098.JPG	ShareUAV	S4500_H_56	56.00000000	✓ Longitude(X):109.787, Latitude(Y):31.0414, Height(Z):322.676; Yaw...	None
970	H_004_01179.JPG	ShareUAV	S4500_H_56	56.00000000	✓ Longitude(X):109.774, Latitude(Y):31.0369, Height(Z):436.011; Yaw...	None
97	H_004_00097.JPG	ShareUAV	S4500_H_56	56.00000000	✓ Longitude(X):109.787, Latitude(Y):31.0412, Height(Z):325.576; Yaw...	None
969	H_004_01178.JPG	ShareUAV	S4500_H_56	56.00000000	✓ Longitude(X):109.774, Latitude(Y):31.0371, Height(Z):433.346; Yaw...	None
968	H_004_01177.JPG	ShareUAV	S4500_H_56	56.00000000	✓ Longitude(X):109.774, Latitude(Y):31.0372, Height(Z):429.427; Yaw...	None
967	H_004_01176.JPG	ShareUAV	S4500_H_56	56.00000000	✓ Longitude(X):109.774, Latitude(Y):31.0374, Height(Z):425.506; Yaw...	None

(Refer to **Figures 93–94**)


5.3.2.3 Importing Camera Parameters


1. Open **Camera Parameters** from toolbar.



2. Click **Add** → Enter values from calibration report (unlisted = 0). Name the preset.


(Refer to **Figures 96–97**)

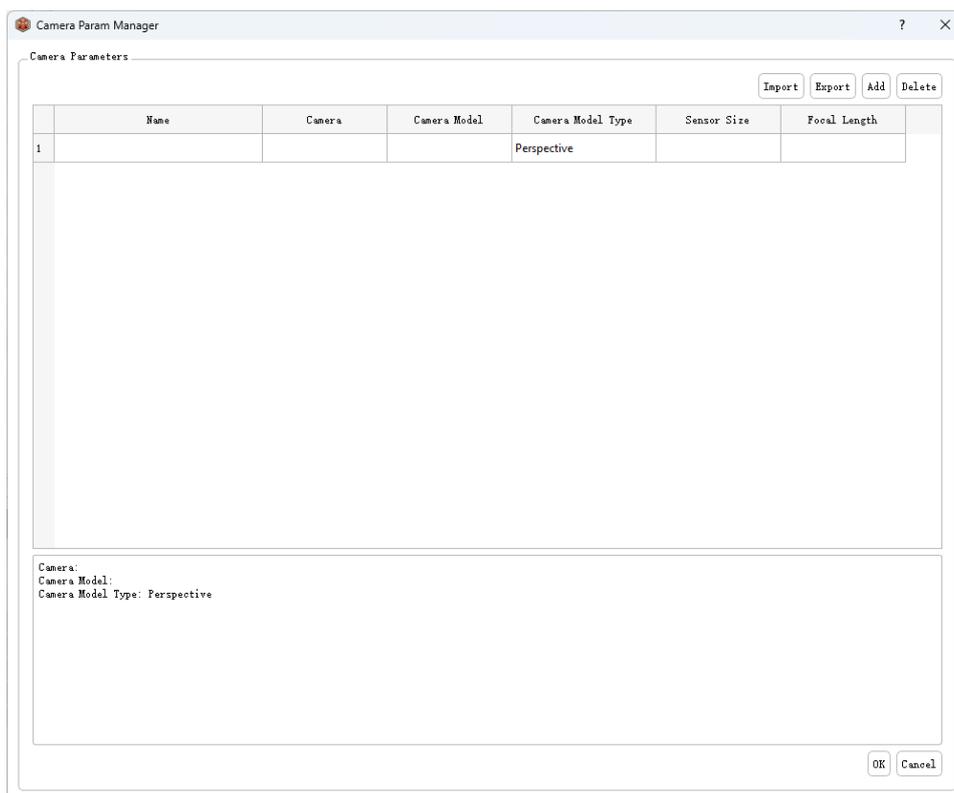

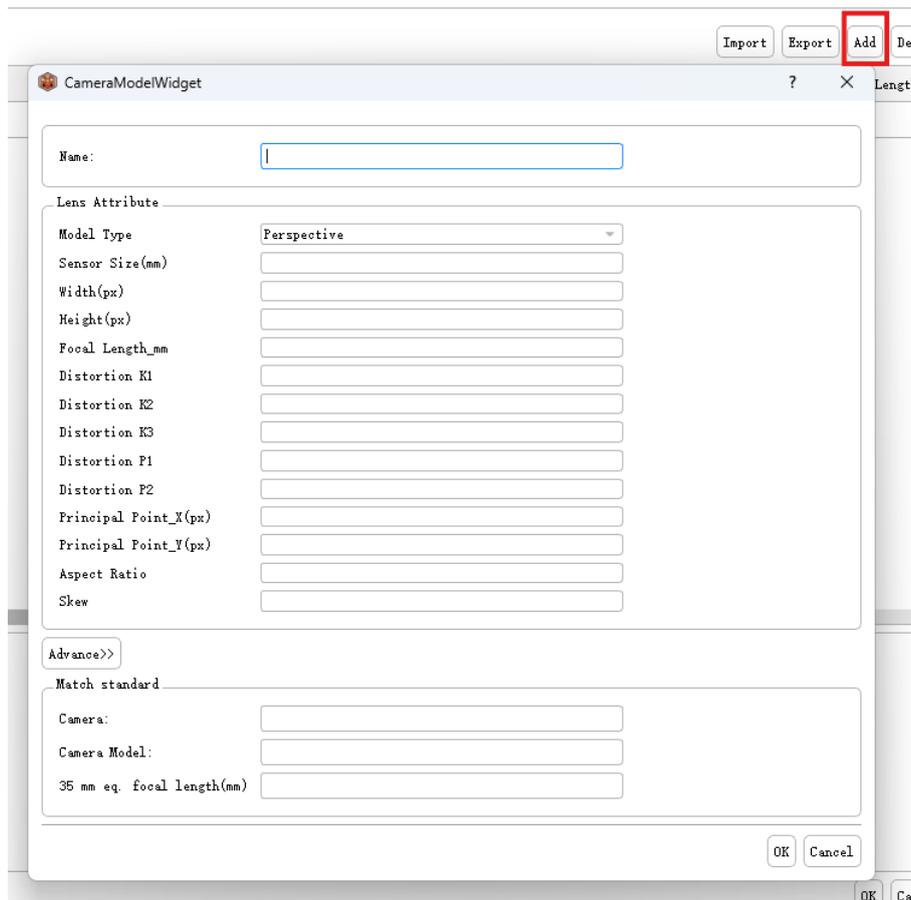


Save/Load Parameters:

- **To Library:** Right-click photo group → *Add Camera Model to Library*.

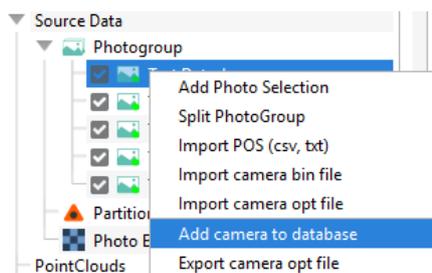

(Refer to **Figure 98**)

- **From BIN/OPT File:**
 - Right-click group → *Import Camera Parameters (bin/opt)*.
 - Select preset → Confirm.

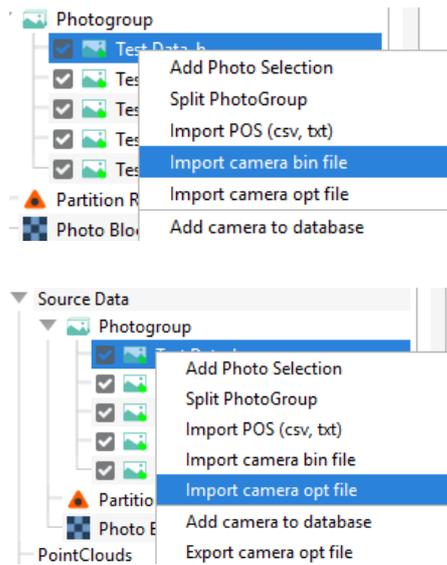


(Refer to **Figures 99–100**)


5.3.2.4 Importing XML AT Files

Right-click project → **Import AT File** (.xml).

- **Note:** Only for blank projects.
- Drag/drop files; multiple imports auto-merge.


(Refer to **Figures 101–102**)



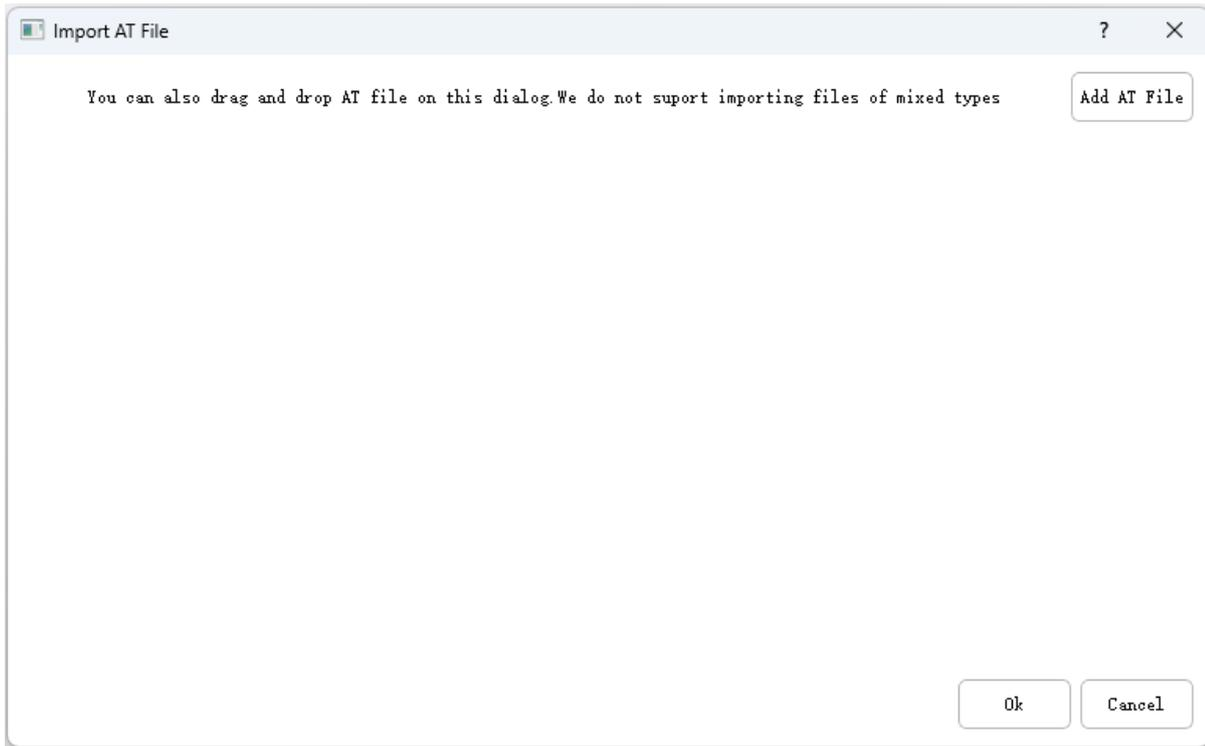

5.3.2.5 Importing Excel Files

Supports .xlsx with structured worksheets:

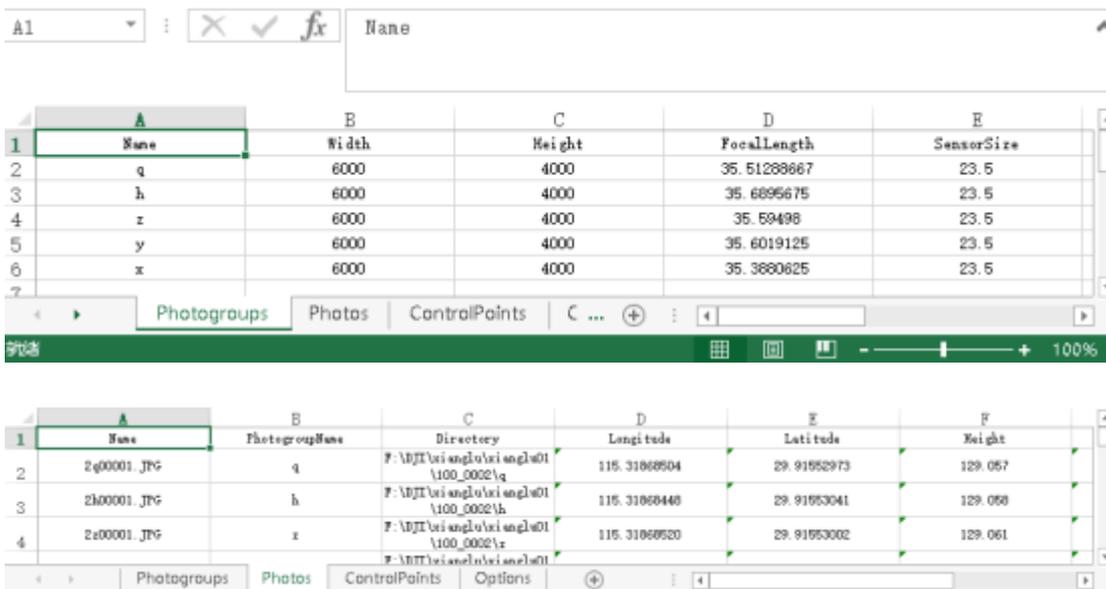

	A	B	C	D	E	F	G	H
1	Name	Longitude	Latitude	Height				
2								
3								
4								
5								
6								
7								

	A	B	C	D	E	F	G	H	I	J	K
1	OptionName	Value									
2	SRS	EPSG:4326									
3	Indadians	FALSE									
4											
5											
6											
7											

Worksheets:

1. Photo Groups:

- Required:* Name, Width/Height (pixels), Focal Length (mm), SensorSize (mm).
- Optional:* Principal Point offsets (pixels/mm), lens distortion (K1–K3, P1–P2).

2. Images:

- Required:* Filename, linked PhotoGroup Name.
- Optional:* Directory, Extension, coordinates (Long/Lat/Height or E/N/H), angles (Omega/Phi/Kappa or Heading/Roll/Pitch).

3. Control Points:

- Avoid adding here; use XML for image-linked points.

4. Options:

- Coordinate system (EPSG/PROJ.4/WKT).
- Root directory (for constructing absolute paths).
- Block type (optional).

5.3.3 Point Cloud Loading

When point cloud data is involved in reconstruction, both **static** and **dynamic** point clouds can be imported and processed as described below.

5.3.3.1 Importing Static Point Clouds

Import scanned point cloud data in the following formats: **LAS**, **E57**, **PLY**.

(Refer to *Figure 105*)

Configuration Options:

- **Point Cloud File Path:**
 - Specify the input path. Supports batch import of multiple files (E57, LAS, PLY).
- **Transformation File Path:**
 - Used with point cloud splitting to save subdivided data.
- **Point Cloud Splitting:**
 - Splits large datasets into smaller chunks to reduce hardware load and prevent lag.
- **Simplified Display:**
 - Optimizes rendering for smoother visualization.
- **Coordinate System Selection:**
 - Must match the point cloud's native CRS. Default: **WGS84**. Other systems available via dropdown.

5.3.3.2 Importing Dynamic Point Clouds

Import scanned point cloud data in **LAS** or **E57** format.

(Refer to **Figure 106**)

Requirements:

- A **trajectory file** is mandatory, containing:
 - GPSTime, Latitude, Longitude, H-Ell (ellipsoidal height).
(Refer to **Figure 107**)

Steps:

1. Confirm the delimiter and preview column mapping.
(Refer to **Figure 108**)
2. Select the point cloud's coordinate system.
(Refer to **Figure 109**)
3. Map data fields and complete the import.
(Refer to **Figure 110**)

5.3.3.3 Adding Point Clouds to Aerotriangulation

Merge imported point clouds with a selected AT task for **integrated reconstruction**.

(Refer to **Figures 111–112**)

Result:

- The AT task will include both:
 - **Photo Group** (image data)
 - **Point Cloud Set** (scanned data).

5.3.3.4 Creating Reconstruction Tasks

1. Right-click the **Point Cloud Set** → **Create Reconstruction Task**.

2. Select point clouds to include and confirm.
(Refer to **Figure 113**)
3. Configure parameters in the pop-up window (see *Section 5.3.5.1* for settings).
(Refer to **Figure 114**)


5.3.4 Tiki3D Master Aerotriangulation


5.3.4.1 Submitting Aerotriangulation Tasks

After importing the POS, right-click on the aerotriangulation task and select "**Create AT Task**" to create a new aerotriangulation task. Enter the name of the aerotriangulation task.

In the reference camera selection, check the NADIR camera as the reference camera.


If using cluster parallel computing, ensure that the image path, project path, and Job path are all using network paths.

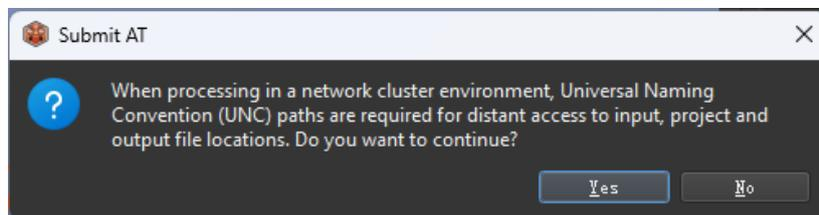

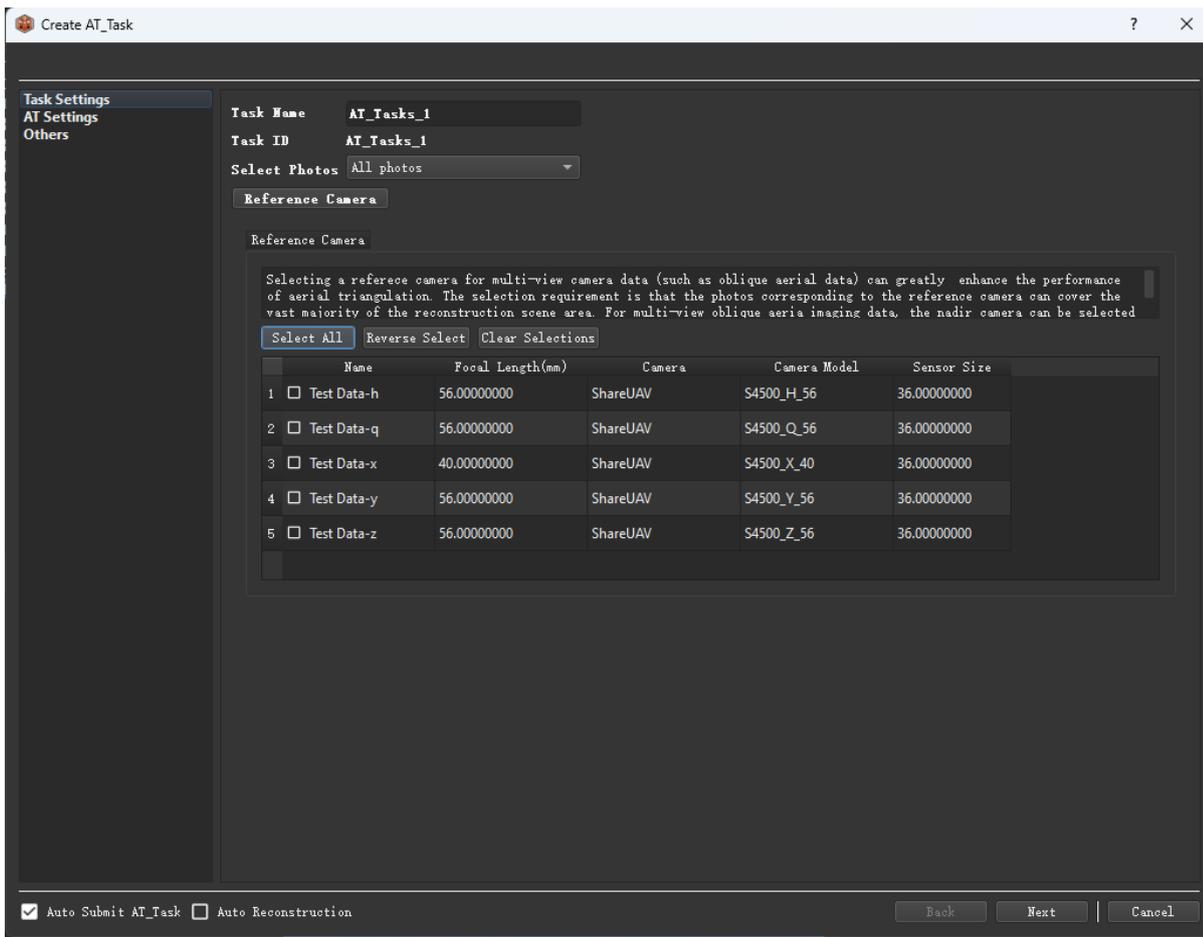

Reference Camera

This is a new aerotriangulation algorithm. If not selected, the general aerotriangulation algorithm will be used. Selecting this can significantly improve the performance of the aerotriangulation. When selecting, you need to specify a reference camera that can cover all survey areas. For multi-view oblique aerial photography data, the NADIR camera can be selected as the reference camera. When submitting the aerotriangulation calculation, the default settings of the software are sufficient to handle most image data. It is recommended to submit with the default settings for the first run. Below are the relevant aerotriangulation settings parameters.

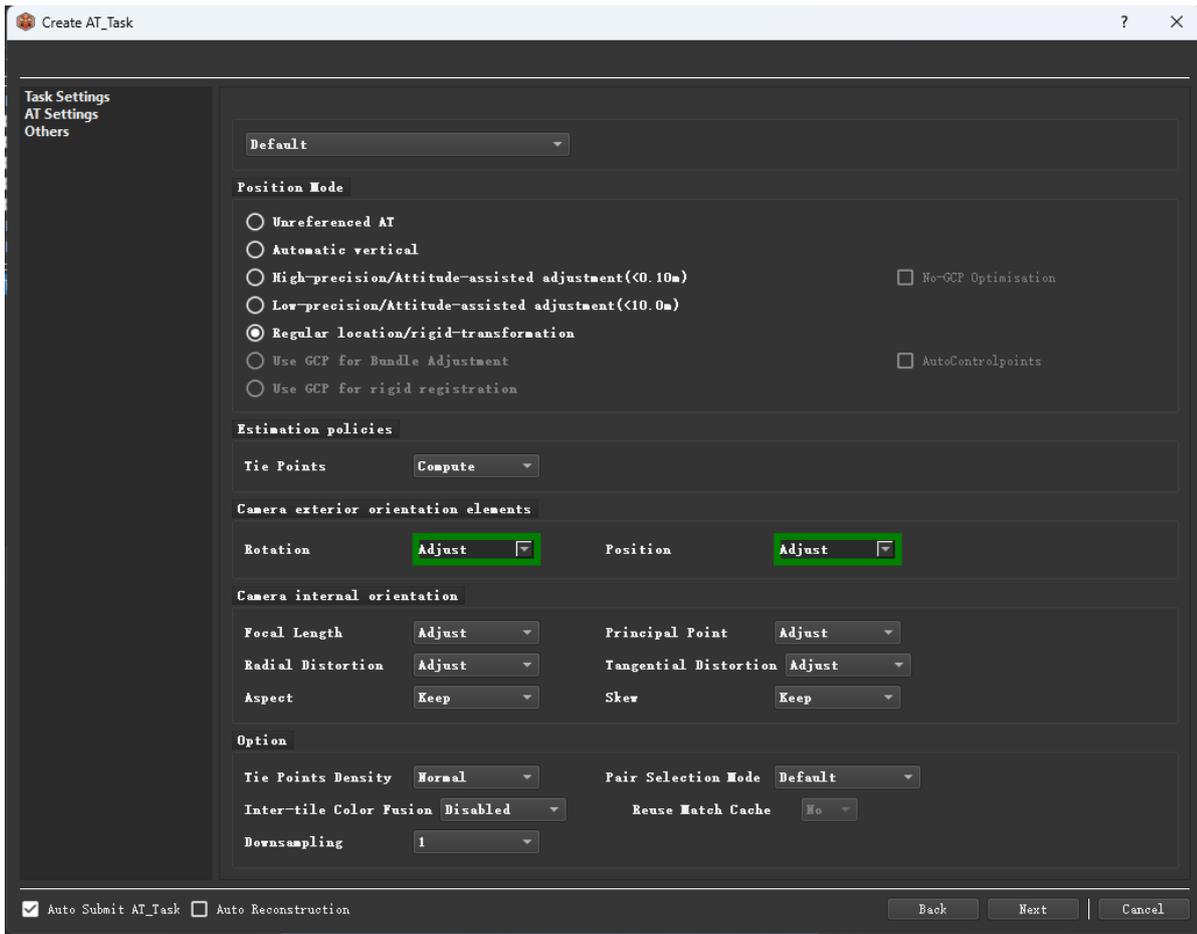

Calculate Only Tie Points

During aerotriangulation, only tie points are included in the calculation, performing a free network aerotriangulation. Control points (GCPs) do not participate in the adjustment solution.

Positioning Mode

- **Unreferenced Aerotriangulation:** Without positioning information, the position and orientation of the block are unrestricted.
- **Automatic Vertical Downward:** The vertical orientation of the block is determined by the composite vertical direction of the images involved in the calculation. This option is used when the positioning information is inaccurate during aerial photography.
- **High Precision Position/Altitude Assisted Adjustment (<0.10 meters):** Used when GNSS/POS positioning accuracy is high. Using GNSS/POS in the adjustment requires that each image has precise position information with an error of <0.1 meters.
- **Low Precision Position/Altitude Assisted Adjustment (<10.0 meters):** Used when GNSS/POS positioning accuracy is slightly lower, with positioning errors needing to be <10 meters.

- **Conventional Position/Altitude Rigid Transformation:** Adjusts the block positioning using image GNSS/POS data, with no high requirements on positioning accuracy.
- **Use Control Points for Bundle Adjustment:** Control points participate in the adjustment, providing precise positioning of the block.
- **Use Control Points Rigid Transformation:** Uses reference control points for rigid registration of the block without correcting geometric distortions, used when control points are not precise (generally not used).
- ~~**Automatic Control Points:** Uses specific targets, measures control point coordinates, and inputs them into the software without manual marking. The software automatically identifies and marks control points in the images.~~

Camera External and Internal Parameter Calculation Methods

- **Calculate:** All parameters are recalculated.
- **Adjust:** Uses the input values as initial values for calculation.
- **Keep:** Uses the input values as precise values and does not perform further calculations.

Tie Point Density

Adjusts the density of tie points extracted during aerotriangulation matching.

- **Normal:** Suitable for most data (the default option).
- **High:** Suitable for data with weak textures or small images, increases the number of tie point matches, but also increases the computation time for aerotriangulation.

Color Consistency Adjustment (Inter-tile Color Fusion)

- **Enable:** The software automatically performs color balancing on all images.
- **Disable:** The software does not automatically perform color balancing on images.

(Downsampling) Sampling Factor

Mainly used for the generation of single-lens photo quick mosaics. The higher the sampling factor, the fewer tie points are extracted, and the lower the image resolution.

Match Pair Selection Mode


- **Default:** Suitable for most data, the default option.
- **Enhanced (Intensify mode?):** If the images mostly consist of weak or no texture areas, and there are many lost images after aerotriangulation, it is recommended to choose the **enhanced** match pair selection mode.



Reuse Match Cache (New feature)

- ...

After selecting the aerotriangulation settings, click "**Next**". If "**Auto Submit AT_Task**" is checked, the calculation will start directly after clicking "Finish". If not checked, the calculation will not start immediately after clicking "Complete", and you will need to click "Submit Reconstruction" again for the software to start the calculation.

"Auto Reconstruction" checkbox:

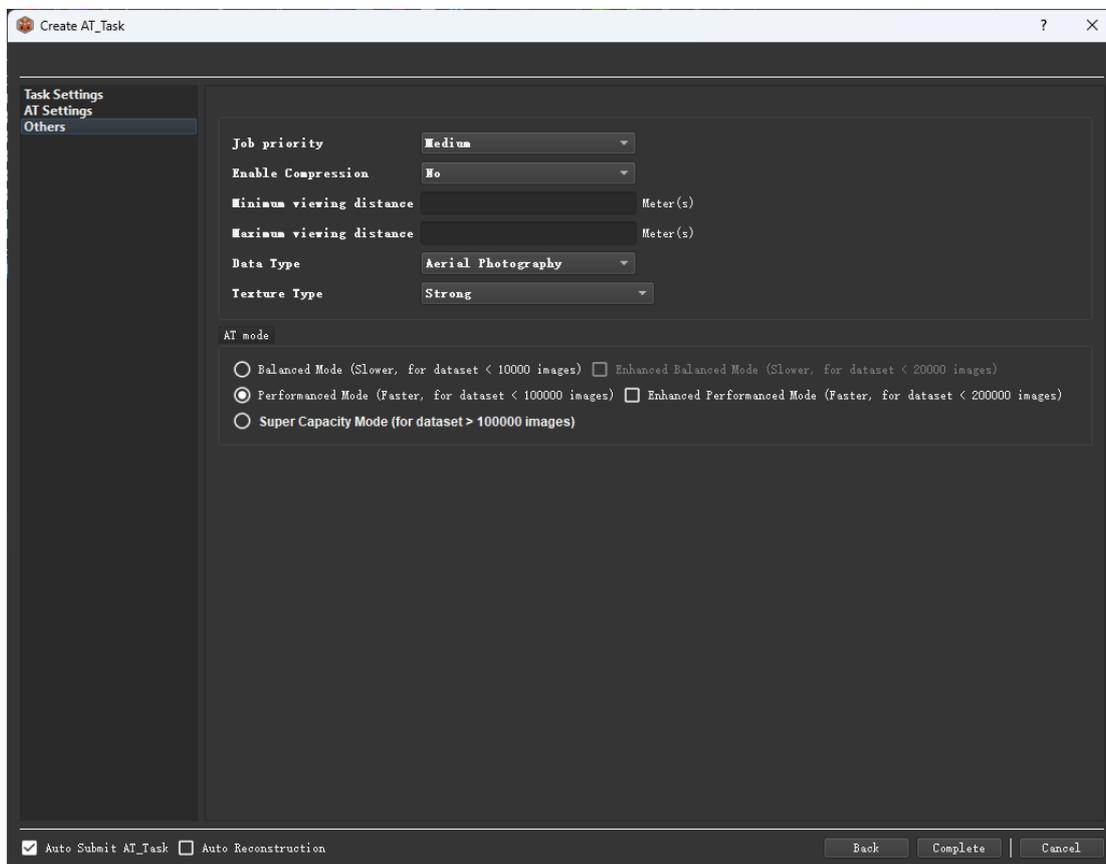




AT Modes:

- **Balanced Mode:** Suitable for general aerial image triangulation processing. This is the default option. A computer with 64GB RAM can process 15,000 to 20,000 images, while a computer with 128GB RAM can process 40,000 to 60,000 images. **With “Enhanced Balanced Mode”**
- **Performance Mode:** Suitable for large-scale data triangulation processing. A computer with 64GB RAM can process 40,000 to 50,000 images, while a computer with 128GB RAM can process 100,000 images. **With “(Faster, for dataset < 100000 images)”**
- **Performance Mode (Enhanced):** Supports larger data volumes with the same memory capacity. A computer with 64GB RAM can process 100,000 images.
- **Capacity Mode:** Suitable for large-scale data triangulation without chunking. This mode uses chunked triangulation adjustment followed by joint adjustment and does not allow merging data from multiple flights. It is recommended for tasks with more than 100,000 photos. A computer with 64GB RAM can process 100,000 to 200,000 photos in a single triangulation process.

After submitting the computation, you need to open the **Engine Manager** of the software to start the computation. Ensure that the Job Path in the Engine Manager matches the path selected when creating the project. The Job Path can be modified in the engine management by right-clicking and submitting the changes. During the triangulation calculation, you can view the progress bar in the properties panel.

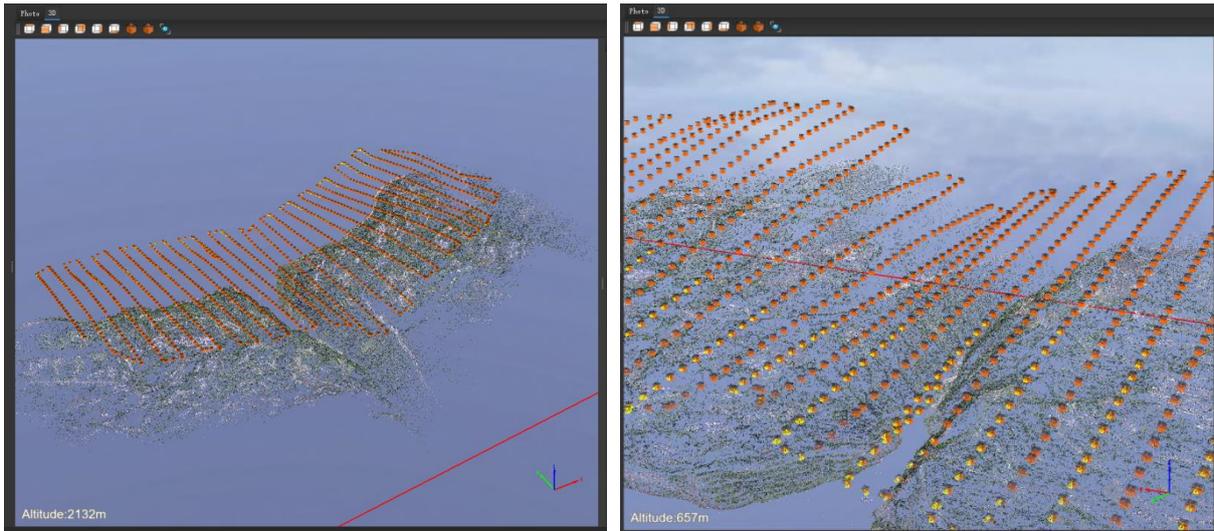

Matched POS points are displayed in orange, while unmatched POS points are displayed in yellow.

Operations Available for Each Aerotriangulation (AT) Task:

- **Start Processing:** Initiates the AT computation. A dialog box will appear after submission, allowing for adjustments to settings.
- **Cancel Job:** Terminates the ongoing AT computation task.
- **Clone AT:** Duplicates an existing AT task. Useful if modifications are needed without altering the original AT results.
- **Clone AT & Update Source Data (Photogroup):** If the imported photo group has been updated, this creates a new AT task with refreshed image data.
- **Delete AT:** Removes unnecessary AT tasks.
- **Unload AT:** Reduces project memory usage and speeds up data loading by unloading the AT task (data remains stored). The task becomes inactive but can be restored via loading.
- **Refresh AT:** Updates AT task information. Use this if displayed data appears incorrect.
- **Set AT Results as Metadata (POS Data):** Copies an AT task and assigns the computed positional data to photos, which then serve as the initial reference for a new AT computation.
- **Export AT Results:** After AT completion, results can be exported in .xml format.
- **Show AT Report:** Displays the AT accuracy report.
- **Rebuild AT Report:** Updates the displayed AT report.
- **Export Log:** Generates a log file documenting the AT process. Useful when standard methods fail to diagnose AT failures; logs can be shared with technical support for analysis.

- **Rename:** Renames the current AT task without affecting project computations.
- **Compute Color Correction (Consistency):** Reduces color discrepancies between merged AT blocks during multi-block modeling.
- **Export Debug File:** Exports project debugging files for software vendor analysis.
- **Show Error Log:** Shows the AT processing details when a task fails, aiding in quick error diagnosis.
- **Export Logs (Alternative):** If error logs are insufficient for diagnosing AT failures, logs can be exported and sent to technical support for further analysis.
- **Unload/Load (Reiterated):** Unloading an AT task reduces memory usage and improves loading times without deleting task data. The task can be reloaded when needed.



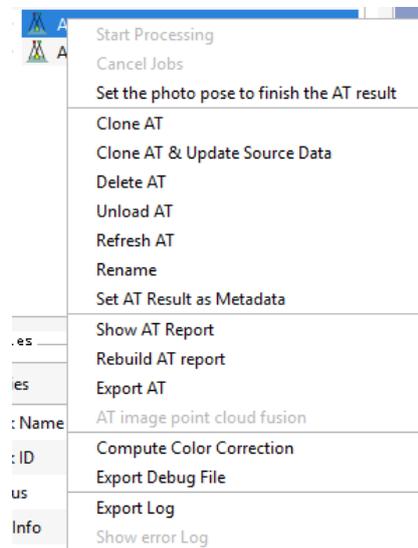


Figure 121

5.3.4.2 Viewing AeroTriangulation Reports

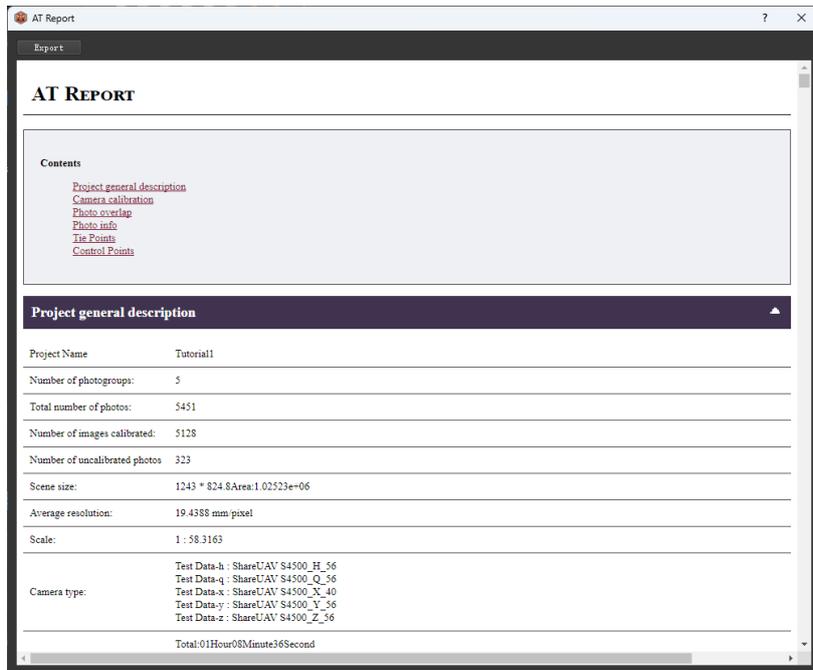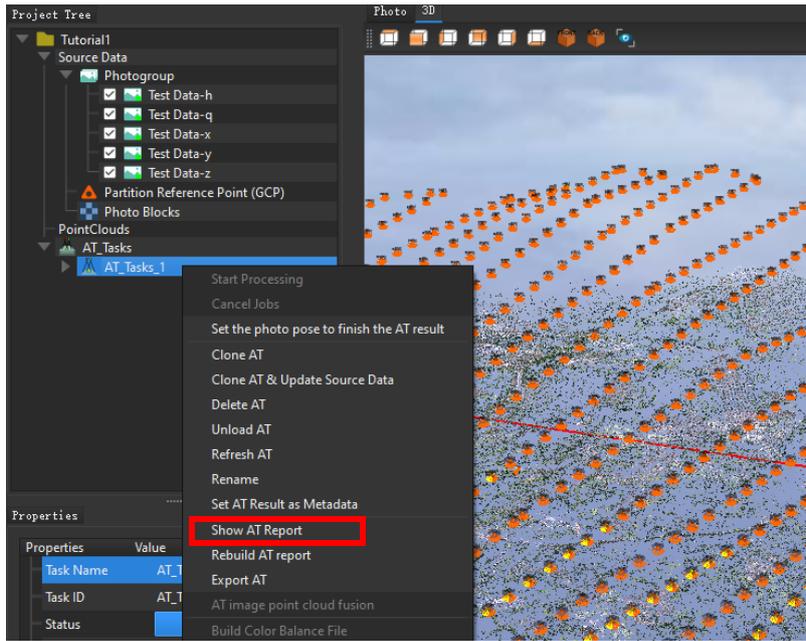

Camera calibration

ShareUAV S4500_H_56

Photogroup name: Test Data-h

Number of photos: 970

Camera: ShareUAV S4500_H_56

Camera model(s): Perspective

Image size: 8192*5456

Sensor Size: 36 mm

Focal Length: 56.0001 mm

Focal Length Equivalent 35 mm: 56 mm

Calibration results

	Focal Length(mm)	Focal Length Equivalent 35 mm [mm]	Principal Point X (pixels)	Principal Point Y (pixels)	K1	K2	K3	P1	P2
Calibration value	56.0001	56	4131.17	2695.17	0.0764425	-0.203684	-0.180165	-4.51309e-05	-0.000194547

Tie Points

Tie Points

Number of Points	Median Number of Photos per Point	Median Number of Points per Photo	ReprojError (pixels)	RMS (pixels)	RMS (meters)
636841	3	549	0.392922	0.50069	0.0107746

Run time

Total:01Hour08Minute36Second
 Feature Extraction:48Minute06Second
 Image similarity:02Minute21Second
 Feature Matching:04Minute31Second
 Adjustment13Minute38Second


Quality overview

Datasets: 5128/5451 Calibrated(94.0745%)

Down Sampling: 1

Tiepoints: 636841 Median:549

RMS: 0.50069 pixels

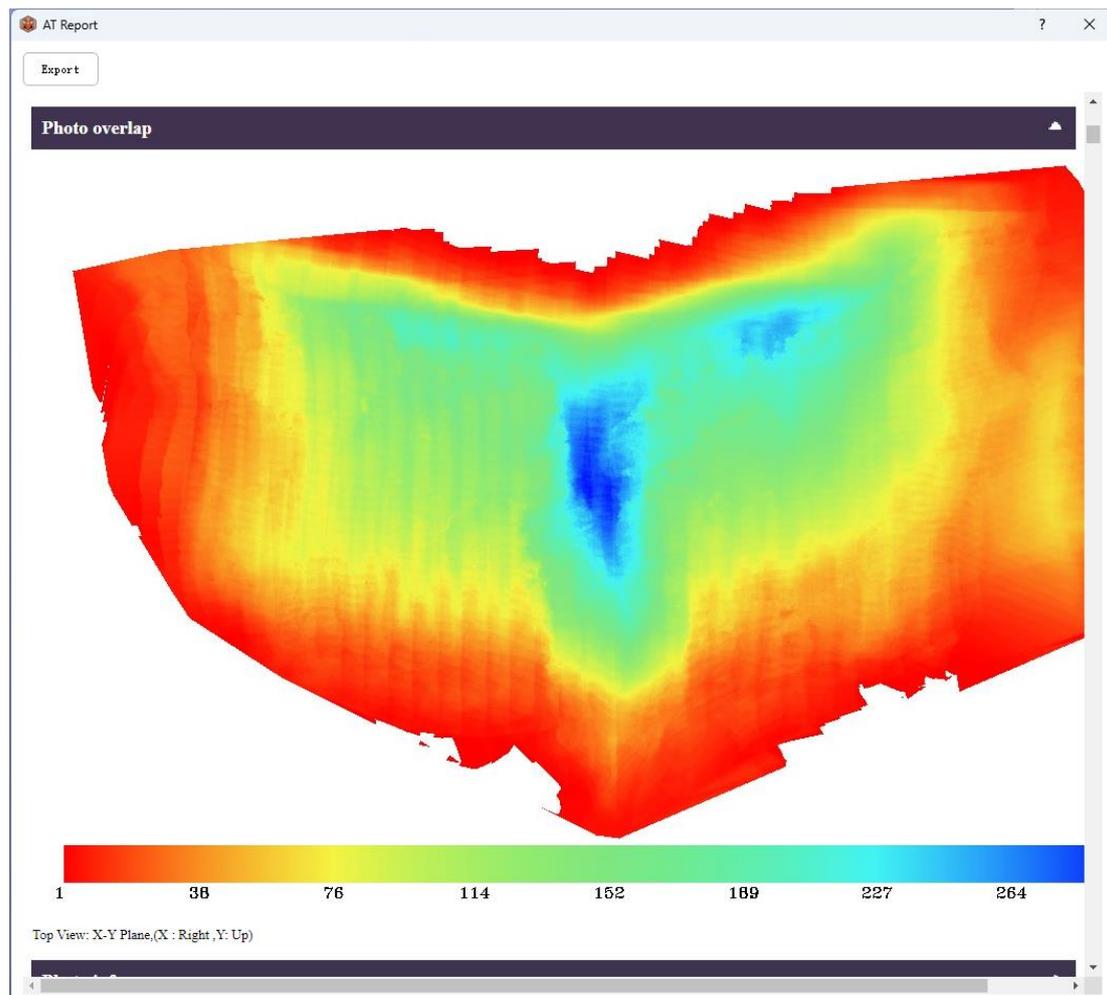

Quality Report

Calibration Data Volume and Homologous Tie Points

- Check the volume of calibration data and the number of homologous tie points.

Mean Reprojection Error

- Review the mean reprojection error, which should be less than 1 pixel.
- For manned aerial data, the mean reprojection error should be < 0.6 pixels.
- For unmanned aerial data, the mean reprojection error should be < 1 pixel.

Control Point/Check Point Errors

- In the control point list, review the residuals and mean errors of control points or check points.

- The RMS error of control points should generally be less than 1 pixel.
- The RMS error of check points should be less than 2-3 pixels.

5.3.4.3 Import Custom Coordinate System


Tiki3D supports importing custom coordinate system files through the following steps:



Method 1: Modify Existing PRJ File

1. Navigate to:
World Coordinate Systems → **More** → **Spatial Reference System Database**
2. This displays all built-in coordinate systems (stored as .prj files).
3. Modify an existing .prj file based on your coordinate data (see Section 7.7 for editing guidance).
4. After modification, import the updated .prj from the **Spatial Reference System Database**.
(Refer to **Figure 126**)

Method 2: Add a New Custom System

1. Scroll to the bottom of the database and select **User-Defined Coordinate Systems** → **Define New System**.
2. Click **Browse Coordinate System File** to import the desired .prj file.
3. Click **Add to Library** to store it under **User Defined Systems**.
4. To remove a system, select it and click **Remove from Library**.
(Refer to **Figures 127–128**)

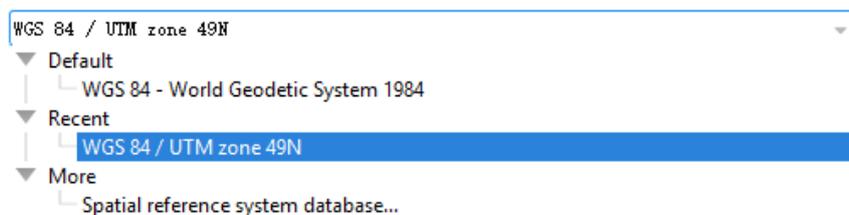

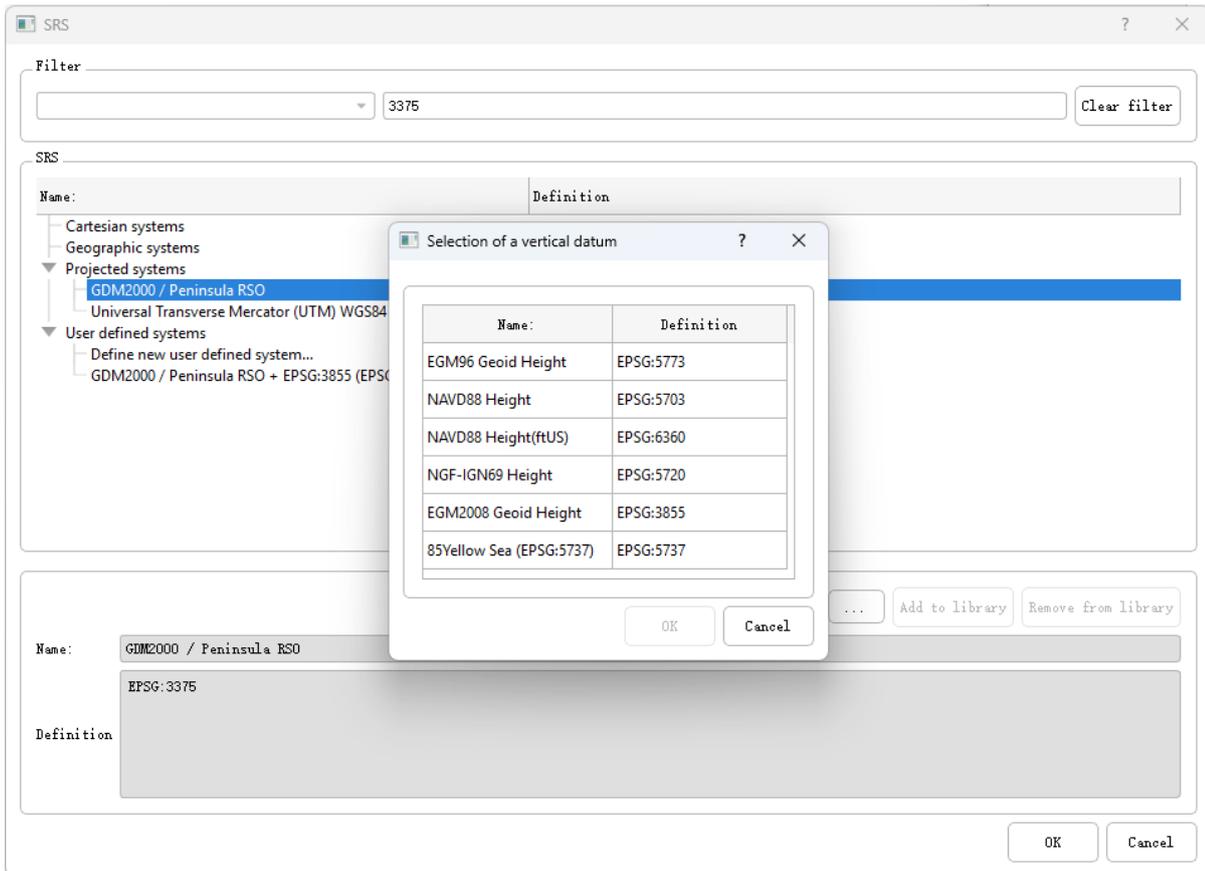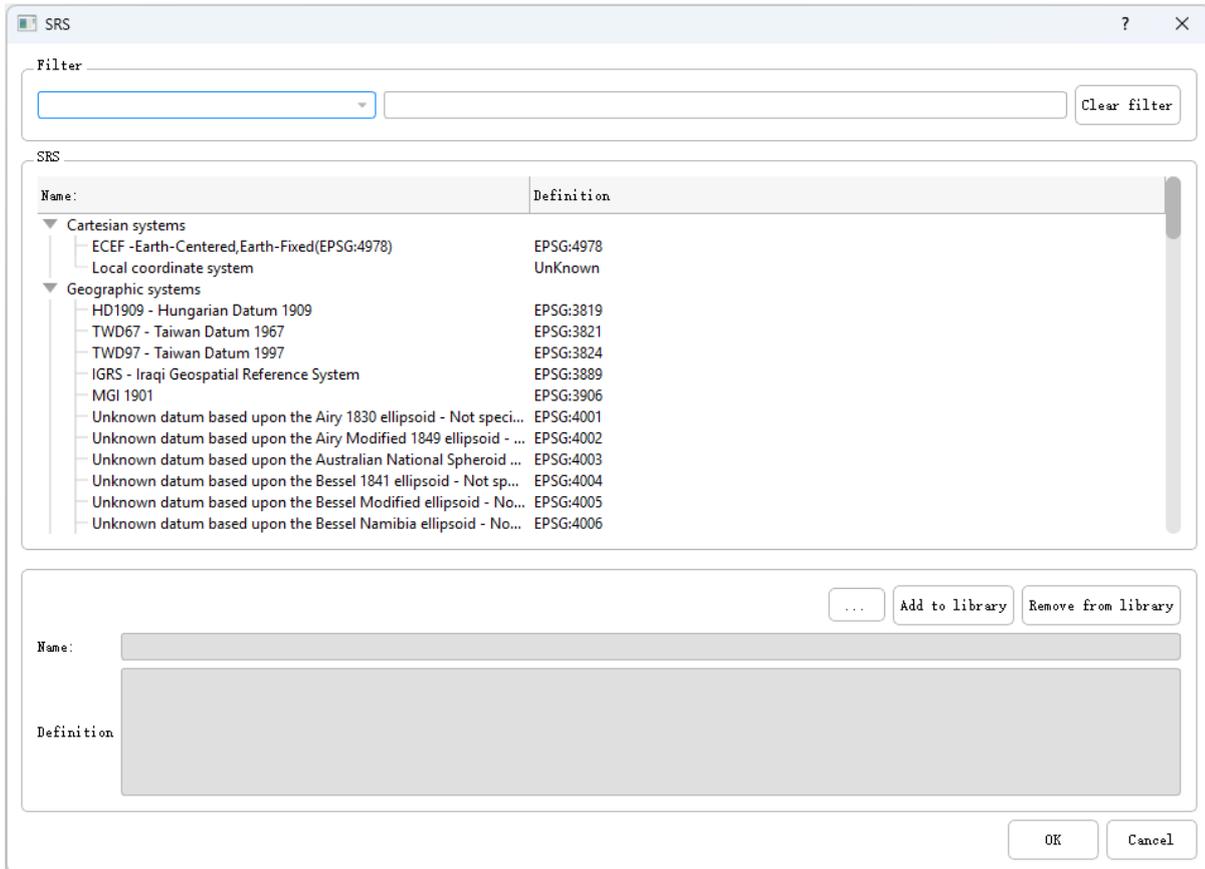

Custom ENU Coordinate System

1. Click **Define New System**.
2. Under **Name** and **Definition**, input in the format:


ENU: [Latitude], [Longitude]

(Example shown in **Figure 129**)

3. Click **Add to Library** to save the ENU system.

5.3.4.4 Adding/Importing Control Points

After completing the aerotriangulation (AT), it is necessary to add control points. To perform this operation, you must first duplicate the AT task, as editing is only allowed on a copied task.

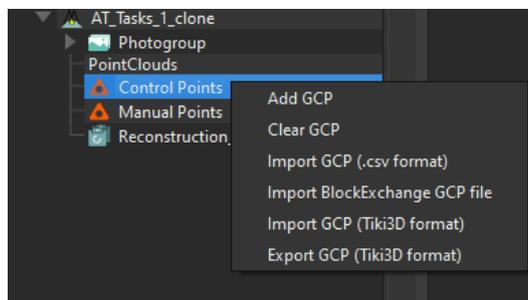


1. Importing Control Points
 - Right-click on the control point information and select "Import Formatted Text Control Points".
 - Choose the control point file and open it.
2. Coordinate System and Field Assignment
 - The process of importing control points is similar to importing POS data.
 - Select the correct coordinate system.

- Assign the appropriate fields to the control points.


3. Completion

- Click "Finish" to complete the import process.

This ensures that the control points are correctly integrated into the project for further processing.

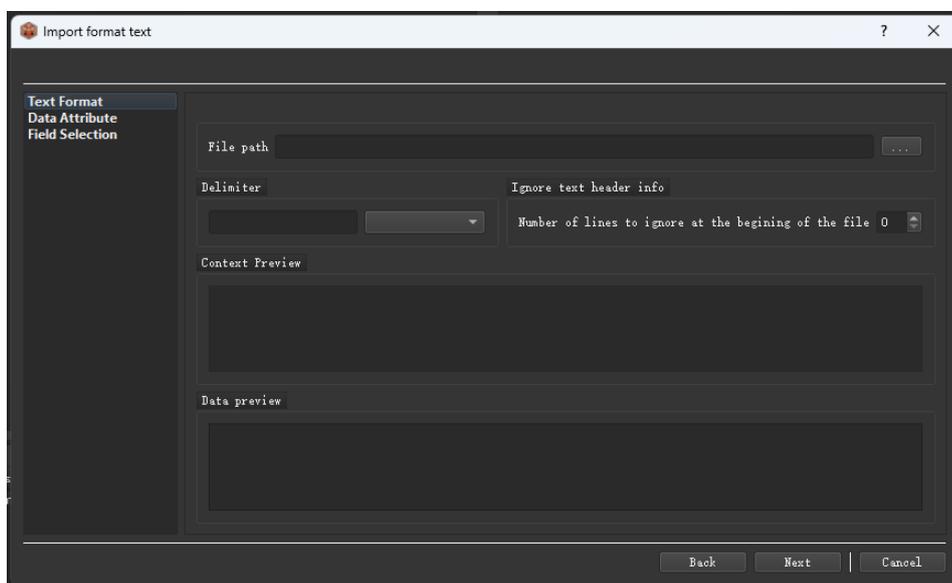


Selecting the Control Point Coordinate System

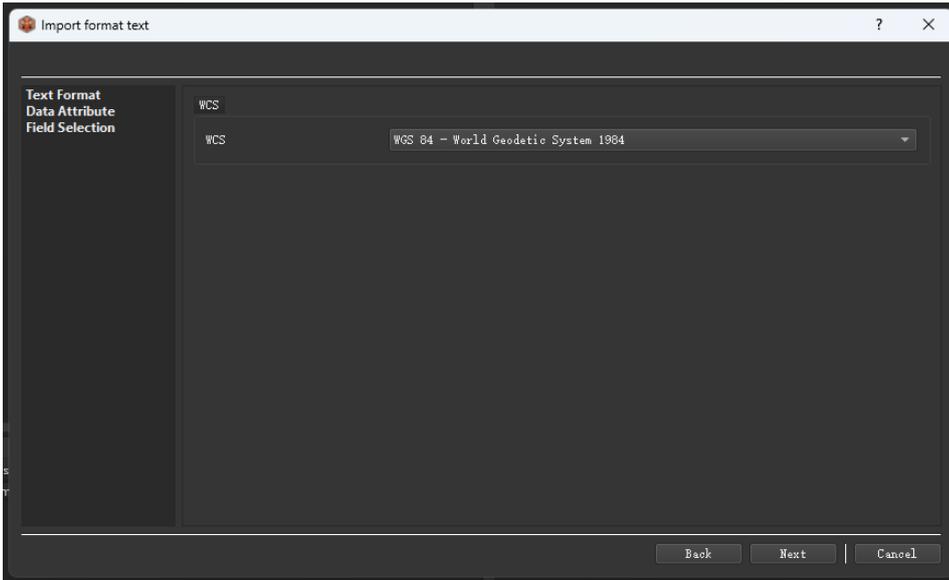

When assigning field attributes to each column, pay attention to the order of the XY values. In commonly used coordinate systems:

- A 6-digit length typically represents the **X value**.
- A 7-digit length typically represents the **Y value**.

Ensure the correct assignment to maintain data accuracy.

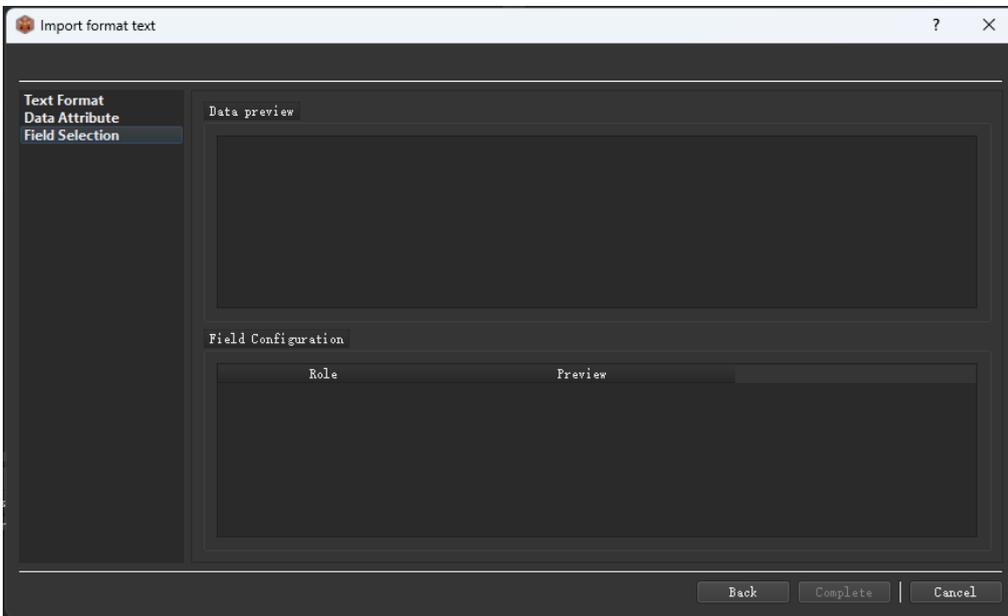

After importing, you can review the control points in the control point list. The list displays the error statistics for all control points.

After the control points are imported, they are displayed in a list format.

Additionally, you can view them in the 3D interface. In the interface:

- Red markers indicate points that have not been measured.
- Green markers represent completed control points.
- Yellow markers denote check points.

When marking points, click on a control point and locate its match in the photo interface. Here, you can see the images where the software predicts the control point is located. Click on one of the photos to start marking the point.

....

5.3.4.5 Tie Point Selection and Adjustment

Marking Control Points:

1. Click on a control point in the interface to view software-predicted photo locations.
2. Select a photo to begin marking (pinning).



Figure 140

Marking Interface Controls:

- Mouse wheel: Zoom in/out
- Left mouse button: Pan image
- Visual indicators:
 - Yellow cursor: Unrecorded point
 - Shift + Left click: Confirm marking (point turns red upon confirmation)
 - Right-side panel displays marked photos

Photo Status Colors:

- Red: Predicted point at photo edge

- Green: Predicted point near photo center
- Yellow: Intermediate position

Epipolar Line Display:

- Green epipolar lines appear (transparent)
- Press "V" to toggle visibility

Marking Requirements:

- Mark points in all camera groups
- Minimum 3 photos per lens group
- Require ≥ 4 control points before submitting adjustment



Figure 141

Check Point Usage:

- Scroll to bottom of control point list
- Checkbox in last column designates check points
- Check points:
 - Excluded from adjustment
 - Generate error reports in AT output (*Refer to Figure 142*)

Adjustment Options:

1. Control Point Adjustment (Recommended):


- a. Full geometric registration using control points
 - b. Default parameters suggested
2. Rigid Transformation (Not Recommended):
- a. Basic alignment only
 - b. No long-range geometric correction

Post-Adjustment:

- Always review AT quality report after computation
- Verify accuracy metrics before proceeding

5.3.4.6 Exporting Aerotriangulation Results


Right-click on the AT task and select **Export AT Results**.

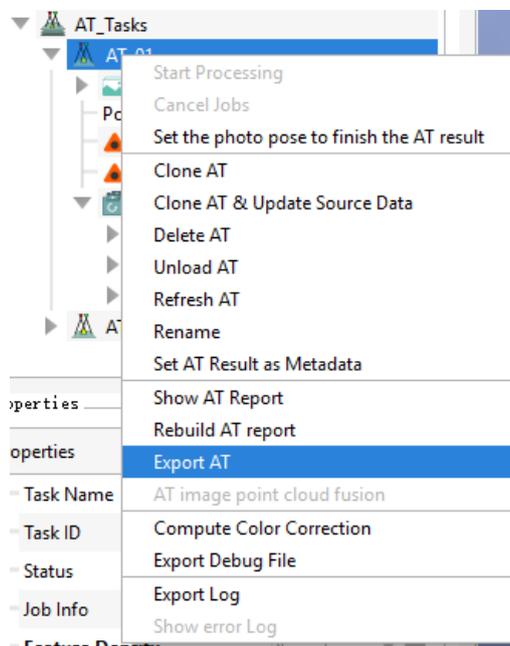

Supported Export Formats:

- 1. **.at Format** (Recommended)
 - a. **Tiki3D's proprietary format** for internal AT data transfer

- b. Advantages:
 - i. Smaller file size
 - ii. Faster import/export speeds
- c. Default output includes tie points.

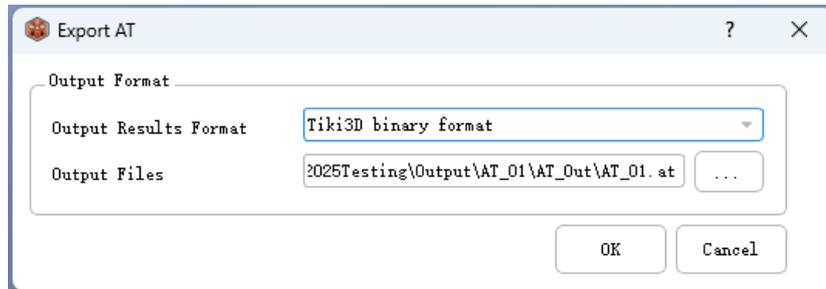


2. .xml Format (Universal)

- a. Standard format compatible with third-party software
- b. **BlockExchange XML Zip**: Compressed version (.xml.zip) for reduced storage

3. Text File (Internal/External Parameters)


- a. Exports camera calibration and positional data as plain text.

Export Options:


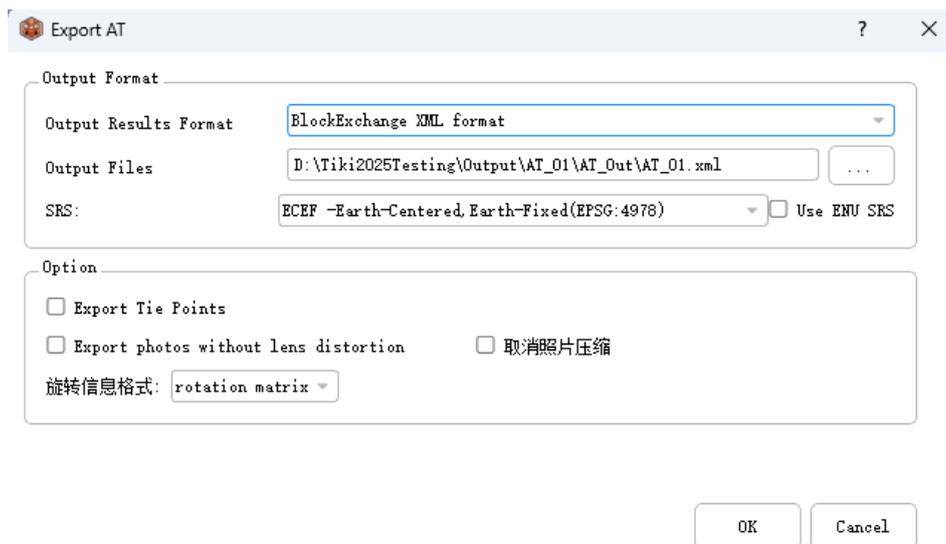


- For **BlockExchange XML/XML Zip**:

- Optional: Include tie points and distortion-corrected images.

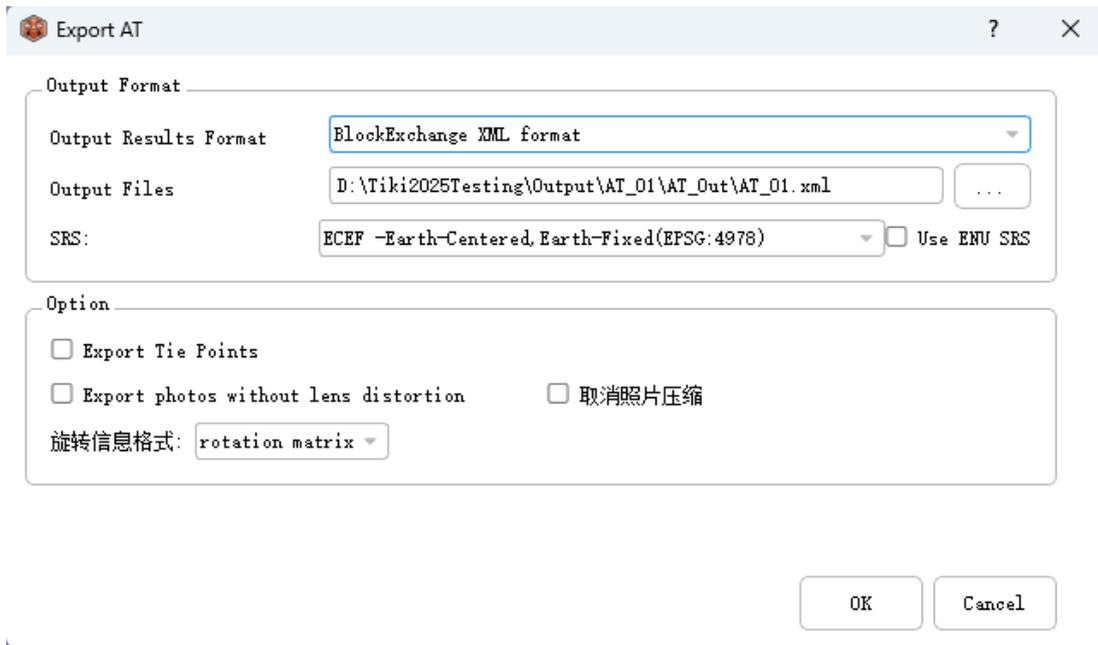

- For **Tiki3D Binary Format (.at)**:
 - Optimized for Tiki3D workflows (default selection).

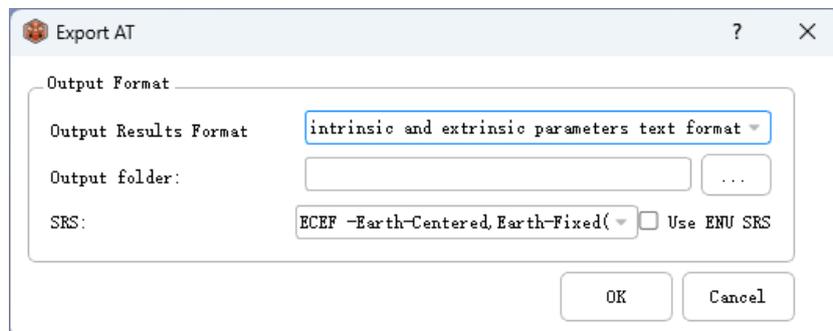

Click **Confirm** to export.

5.3.4.7 Importing Aerialtriangulation Results

Prerequisite:

AT results can only be imported into a **blank project**. Existing projects with data cannot accept AT imports.


Steps:

1. Create a New AT Project:

- a. Start by generating a fresh project.


2. Import AT Files:

- a. Right-click the **project name** → Select **Import AT Files**.

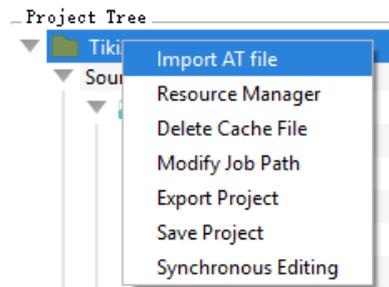

3. File Selection:

- a. Drag and drop the AT result files (.at/.xml/.xml.zip) into the dialog box.
- b. To **merge multiple AT tasks**, add all relevant files simultaneously. The software will automatically combine them during import.

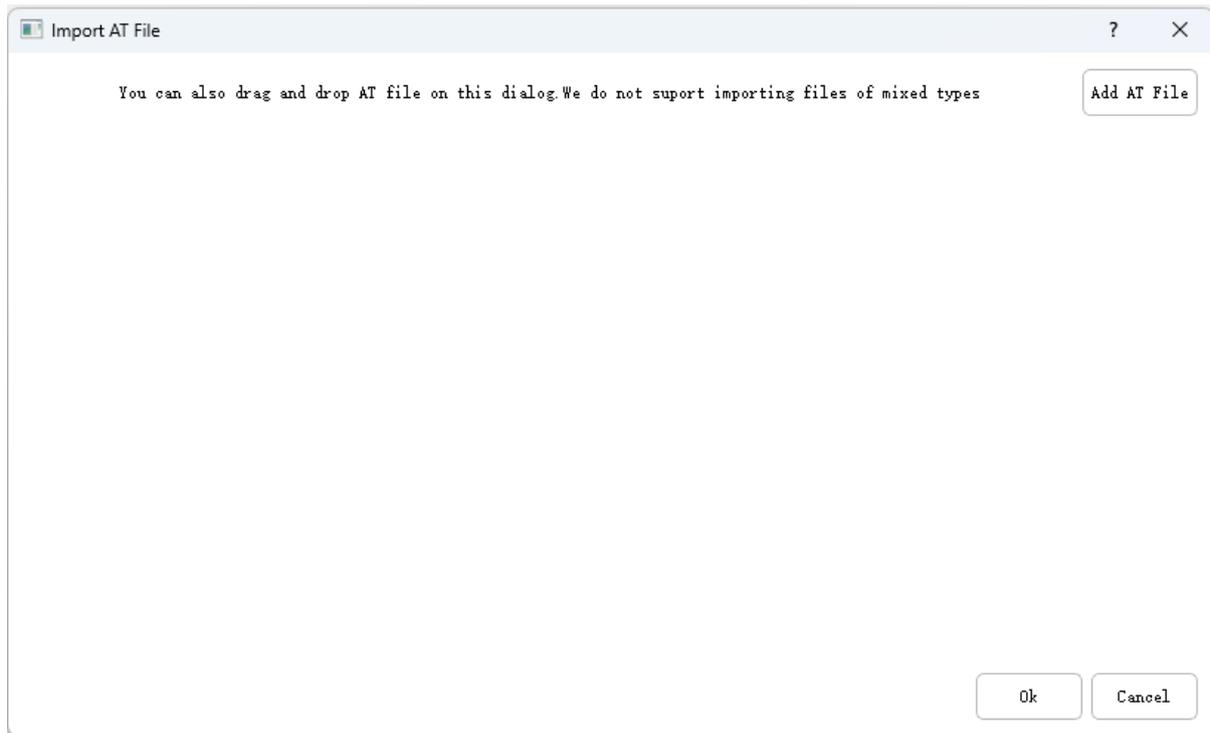


5.3.5 Tiki3D Master Reconstruction

5.3.5.1 Reconstruction Parameter Settings

Create Reconstruction Task

After confirming the AT results, proceed with 3D reconstruction:

1. **Right-click** the reconstruction task set → **Create Reconstruction Task**. (Refer to **Figure 143**)

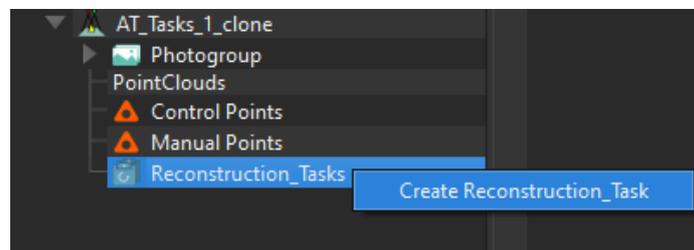


2. Enter the Reconstruction Task Name and click **Next**.

Tile Coordinate System

- Only available for **georeferenced projects**.


- Defines the spatial framework for tiles (independent of the final 3D model's CRS). (Refer to **Figure 144**)

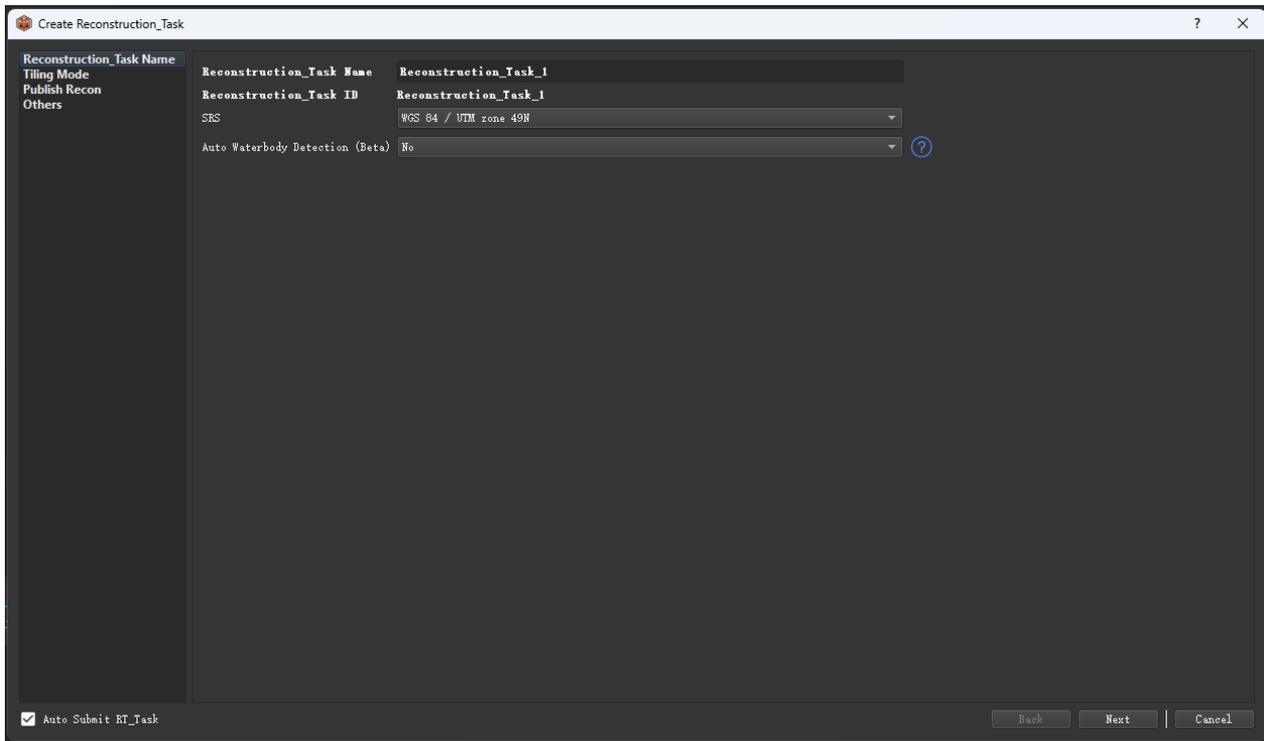

Auto Waterbody Detection (beta)

Model Partitioning (Tiling)

- **Why?** Large models exceed typical PC memory limits.
- **Rule:** Each tile's memory usage \leq **50% of system RAM**.
- **Adjust Bounding Box:** Drag edges in the 3D view or use constraints. (Refer to **Figure 145**)

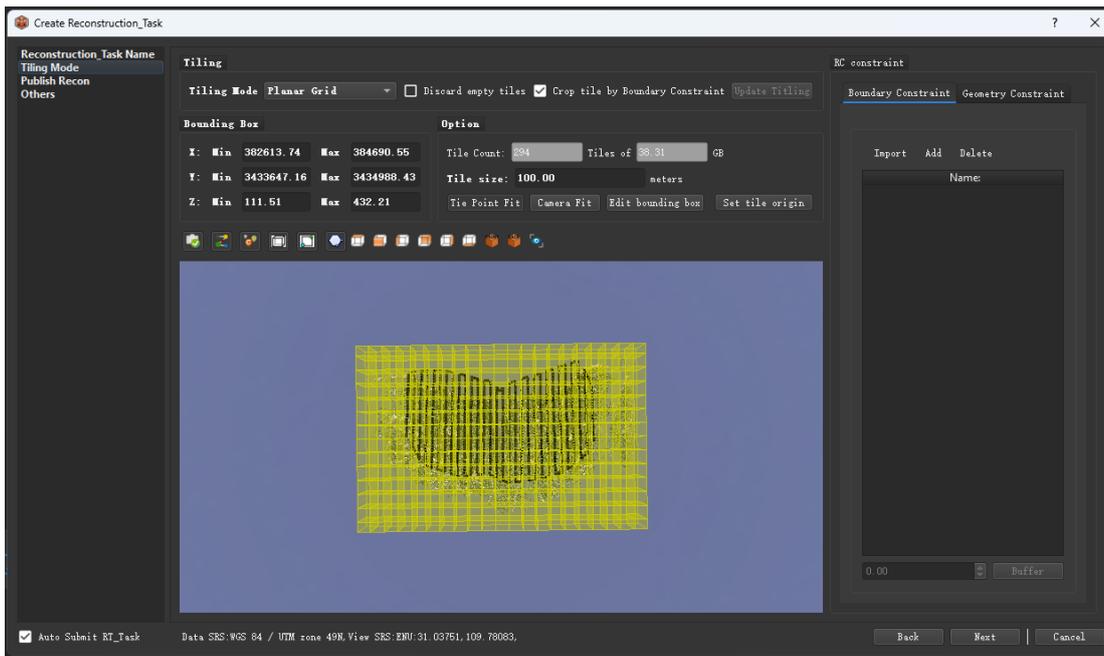

Tile Division Methods

1. **No Division:** Single tile (not recommended for large areas).
2. **Planar Division:** Splits along XY plane.
3. **Spatial Division:** Divides into cubic tiles.
4. **Adaptive Division:** Automatically balances tile size based on memory.

Set Tile Origin


- **Auto-Adaptive:** Centers data near the origin to avoid precision loss.
- **Custom:** Manually set the origin (useful for model merging).

Output Boundary Constraints

Tiki3D provides multiple methods to constrain the output range of the results.

- **Adapt to Tie Points:** During model production, all tie points are included in the production range (i.e., the default range).

- **Adapt to Cameras:** Projection range of the flight's exposure point position data is used as the production range.

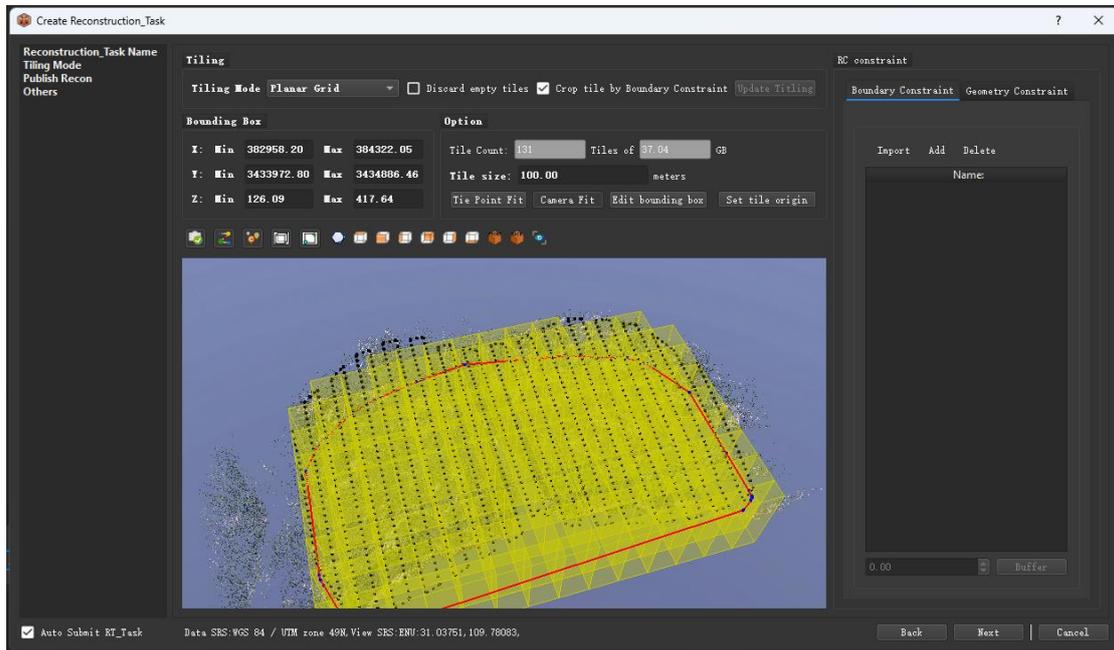

Boundary Constraint

Import


The software supports importing KML and SHP formats. For local coordinate systems, the SHP format is recommended. Click Import, then select the corresponding range file to import.

Add

Directly draw the model production range using the mouse.

Hold ALT + Left Mouse Button to start drawing and Right Mouse Button to finish.


Once the drawing is complete, a polygonal constraint range will be created.

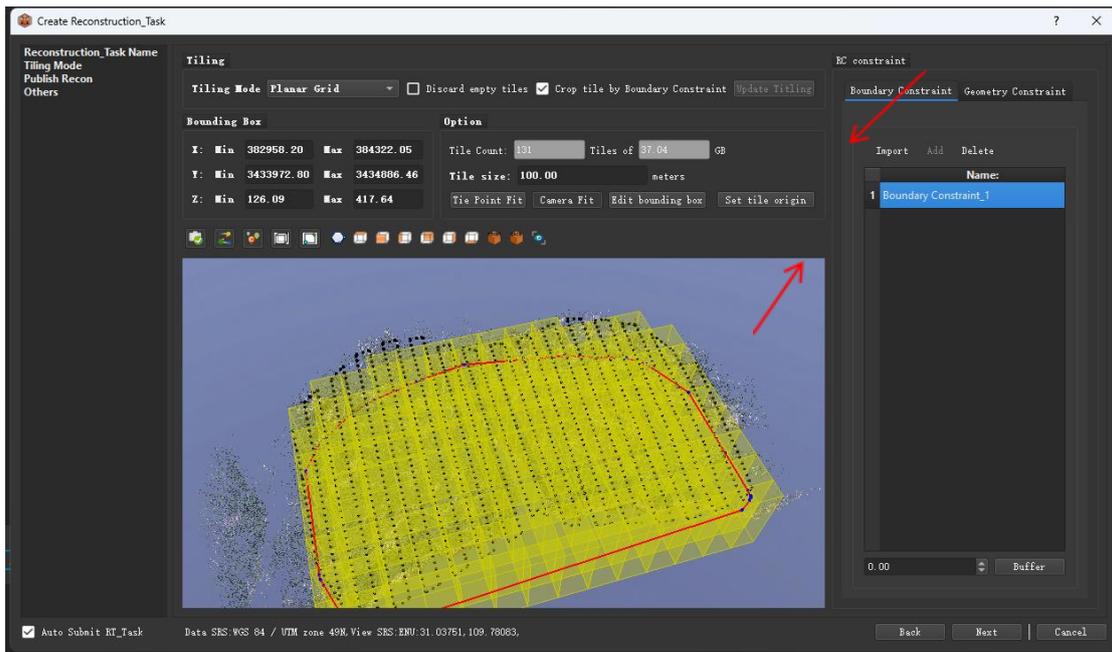

Geometric Constraint

During aerotriangulation, water surfaces, being weak-texture areas, often result in significant image loss, leading to holes and distortions in the model. Typically, these issues are addressed through post-modeling repairs. To improve this situation, water surface constraints can be added to the model.

In introducing constraints, locate the Geometry Constraint tab. Geometric constraints support two methods for defining the constraint range: importing files and manual addition. Imported files support .shp and .kml formats.

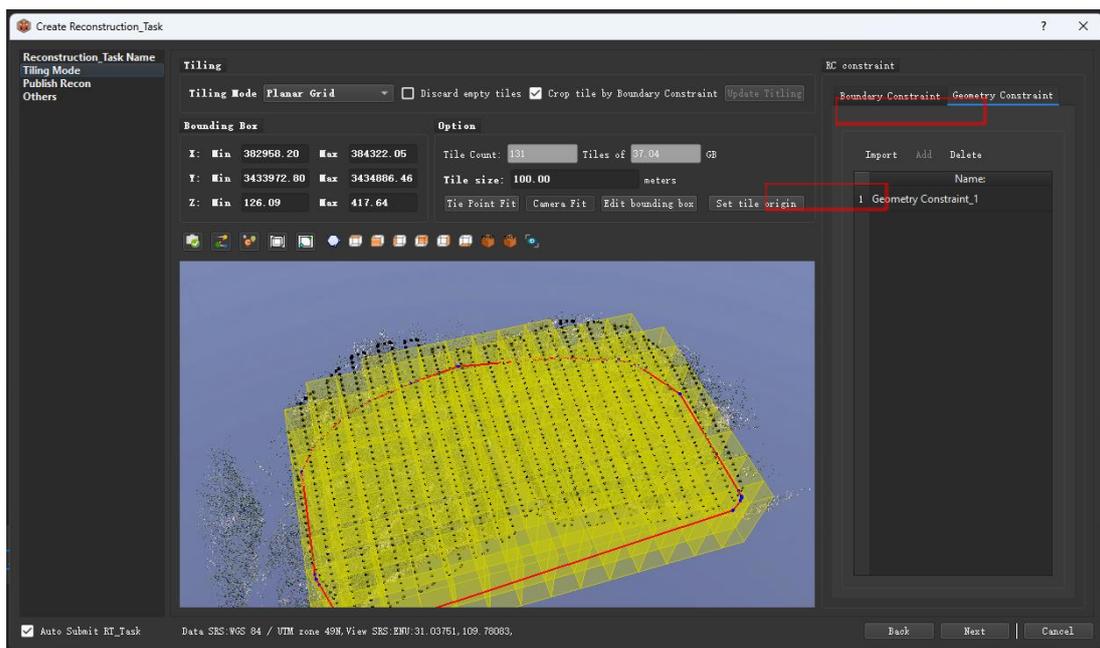

Import

Click Import and select the corresponding constraint range file to import.

The software supports .shp and .kml formats. For local coordinate systems, the .shp format is required.

Add

If there is no predefined water surface constraint range, you can directly draw it in the 3D view.


Hold the ALT key, use the left mouse button to start drawing, and the right mouse button to finish.

Edit Geometric Constraints

Right-click and select Edit Geometric Constraints to set the water surface elevation.

Hold the ALT key and drag the Z-axis or manually input the elevation value to define the water surface constraint elevation.

This process allows for precise control over water surface constraints, improving the accuracy and quality of the model in weak-texture areas

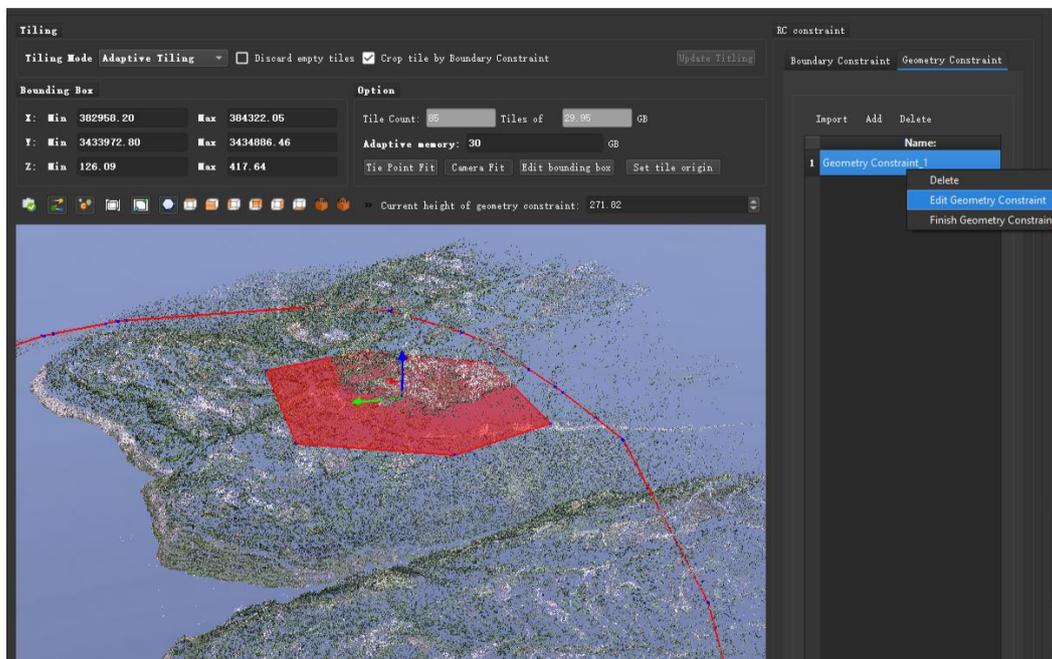

Water Surface Constraint

- Fixes water body distortions (common in weak-texture areas):


- Submit reconstruction.
- Import/draw water surface bounds + set elevation.
- Generate model.

Reconstruction Output Configuration

Select the output format and path. Individual tiles can be chosen for reconstruction, and the model coordinate origin can be customized.

Output Settings (Refer to *Figure 146*)

- **Output Formats:** OSGB, OBJ, DAE, 3DTiles, 3MX, LAS, Esri i3S, SuperMap S3M, FBX, Google Earth 3D KML, etc.
 - Note: For Fast OrthoMosaic (rapid orthophoto generation), avoid tiling. Large datasets may not support this output.
- **Output CRS:** Typically matches the control point coordinate system.
- **Texture Quality:** Ranges from 0% to 100% (original resolution)

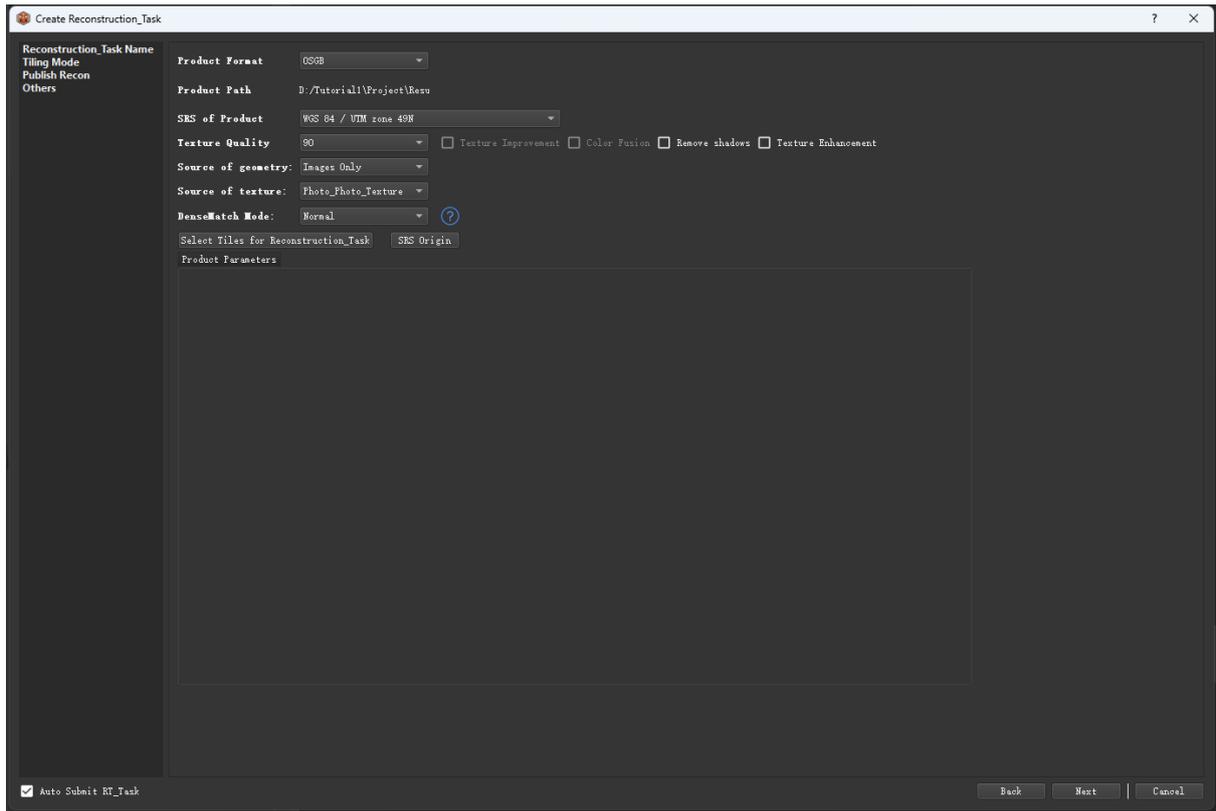

Geometry Source

Determines the primary data used for reconstruction:

- **Images for Geometry:** Relies solely on photos.
- **Hybrid (Images + Point Cloud):** Balances speed and detail.
- **Point Cloud for Geometry:** Uses LiDAR/scanned data.

Texture Source

- **Image-Based Geometry:** Only imagery can be used for texturing.
- **Point Cloud-Based Geometry:** Options include:
 - **Fast LiDAR-Image Fusion:** Lower resolution, faster processing.
 - **Standard/Fine Fusion:** Improved detail using dense point clouds.
 - **LiDAR Only:** Applies native point cloud coloring.

Hybrid Geometry Texturing

- **Fusion:** Combines imagery and point cloud data.
- **Fine/Standard Image Texturing:** Uses advanced algorithms for clarity.

Optimization Features

- **Dense Matching Enhancement:** Repairs holes in thin structures (e.g., walls, signs).
- **Inter-Tile Color Harmonization:** Reduces color discrepancies between tiles.
- **Shadow Removal:** Filters out model shadows.
- **Texture Enhancement:** Corrects artifacts like chromatic aberrations.

Tile Selection

Enable selective reconstruction by choosing specific tiles.

Coordinate Origin for Published Data

Set the model's coordinate origin (default is recommended). For merged models, ensure consistent origins across all outputs.

Task Priority

- High/Medium/Low.

Geometry Precision:

- **Fast:** Default for quick results.
- **Ultra-Fine:** Maximum detail (resource-intensive).

Image Pair Selection

- **Standard Mode:** Default pair count for general use.
- **Enhanced Mode:** Increases pairs to improve local quality (e.g., correcting distortions in roads or roofs).

Compression

Reduces temporary file storage by 30% (slightly increases computation time).

Denosing

Optimizes planar surfaces (e.g., roads, walls).

DenseMatching Types

1. **Aerial Data v1.0:** Legacy algorithm.
2. **Aerial Data v2.0 (Beta):** Enhanced for buildings/roads.
3. **Numerical Surround v2.0 (Beta):** Optimized for lattice structures (e.g., towers).
4. **Universal v3.0:** Default hybrid mode.


Cache & System Settings

- **Cache Path:** Defaults to the project folder (change if disk space is limited).
 - **Tip:** Store cache files on separate drives for better performance.
- **Geometry/Texture Pyramids:** Level 0 = highest detail. Lower levels speed up processing.
- **Tile Overlap:** Adjust for seamless merging. Click **[Finish]** to start reconstruction.

Tile Management




Name:	Job status	Job Info	Time update	Engine update	k submission orc	
49	Tile_+083	Pending	None	None	42	
50	Tile_+082	Pending	None	None	53	
51	Tile_+081	Pending	None	None	87	
52	Tile_+080	Pending	None	None	65	
53	Tile_+079	Completed	Complete	2025-03-04 03:55:19	DESKTOP-UP699SS	21
54	Tile_+078	Completed	Complete	2025-03-04 06:33:22	DESKTOP-UP699SS	26
55	Tile_+077	Completed	Complete	2025-03-03 20:42:01	DESKTOP-UP699SS	6
56	Tile_+076	Completed	Complete	2025-03-03 18:41:18	DESKTOP-UP699SS	2
57	Tile_+075	Completed	Complete	2025-03-03 23:48:13	DESKTOP-UP699SS	13
58	Tile_+074	Completed	Complete	2025-03-03 21:53:12	DESKTOP-UP699SS	9
59	Tile_+073	Running(60%)	TextureMesh	2025-03-04 11:02:27	DESKTOP-UP699SS	37
60	Tile_+072	Pending	None	None	50	
61	Tile_+071	Completed	Complete	2025-03-04 02:31:56	DESKTOP-UP699SS	18

- **Visibility:** Toggle all tiles or selected subsets in the 3D view.
- **Import Tile Names:** Load predefined tile selections.

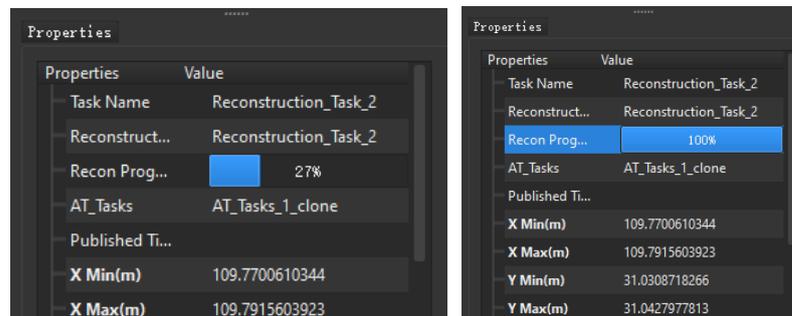

Reset Options:

- **Full Reset:** Restarts the task from scratch.
- **Structure/Texture Reset:** Rebuilds specific components.

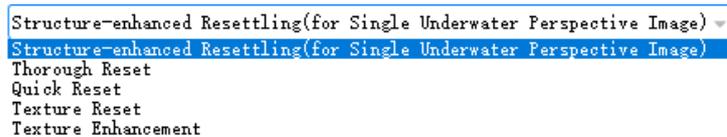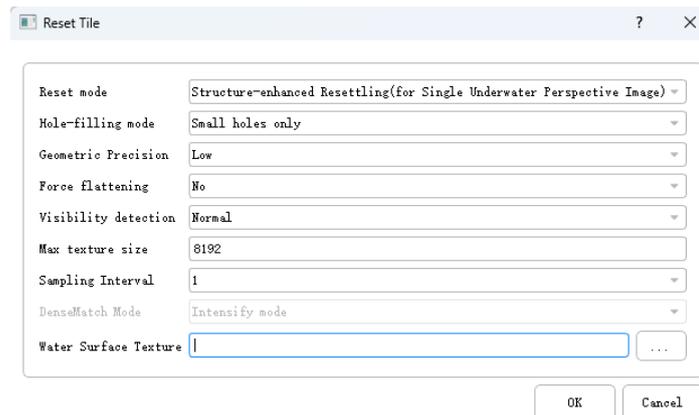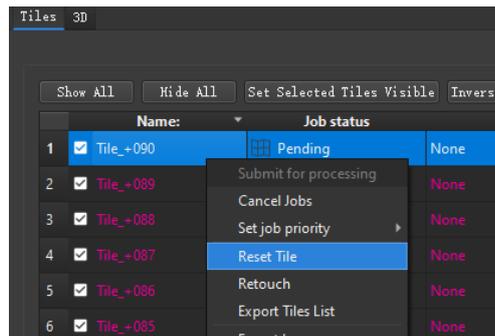

The cache for the currently selected tiles will be cleared, and the model will begin regenerating from scratch.

Structure Reset Enhancement (Best for Nadir-Only Imagery)

This option is designed for nadir-only modeling scenarios, specifically optimizing building facade structures to address issues such as missing, recessed, or damaged sections on building sides.

- **Depth Reset:** Regenerates all cache files related to the tile's depth data.
- **Structure Reset:** Retains partial cache files but regenerates both the model's geometry and textures.
- **Texture Reset:** Only regenerates texture data while preserving the existing geometry.
- **Texture Enhancement:** Resolves texture artifacts such as overexposed highlights ("burned" areas) or irregular spotting.

Hole-Filling Method

- **Patch Small Holes:** Fills minor internal gaps within tiles.
- **Patch All Holes:** Completely fills all cavities in the model, particularly useful for repairing holes in weak-

texture regions.

Geometry Precision

- **Fast:** Default setting, ideal for rapid modeling.
- **Standard:** Balanced precision.
- **High:** Increased detail, resulting in larger file sizes.
- **Ultra-High:** Maximum precision, requiring significant memory and computation time (not recommended for large-scale areas).

Forced Flattening

Applies artificial flattening to specific features in the model, such as water surfaces.

Visibility Detection

- **Standard:** Uses default texture mapping.
- **Enhanced:** Corrects texture errors caused by occlusion by filling gaps with larger mesh patches.

Maximum Texture Size

Configures the dimensions of texture files.


Sampling Interval

Sets the sampling interval (default: 1).

View Error Logs / Export Logs

If reconstruction fails:

- Right-click the tile → **View Error Logs** to quickly diagnose the issue.
- If the cause remains unclear, right-click → **Export Logs** to save the log file for technical support.

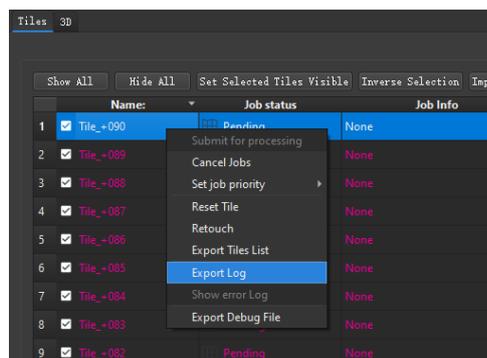

Pop-up 3D View

Enables synchronized viewing between the 2D tile table and 3D model interface, eliminating the need to switch windows.



5.3.5.2 Format Conversion

Format Conversion Tool in Tiki3D

After model production is completed, additional output formats are often required. Tiki3D provides a format conversion tool to transform data formats and deliverables without reprocessing.

How to Use


1. Locate the completed reconstruction task in the project.
2. Under the **Reconstruction Output Set**, right-click and select **Convert Data Format**.

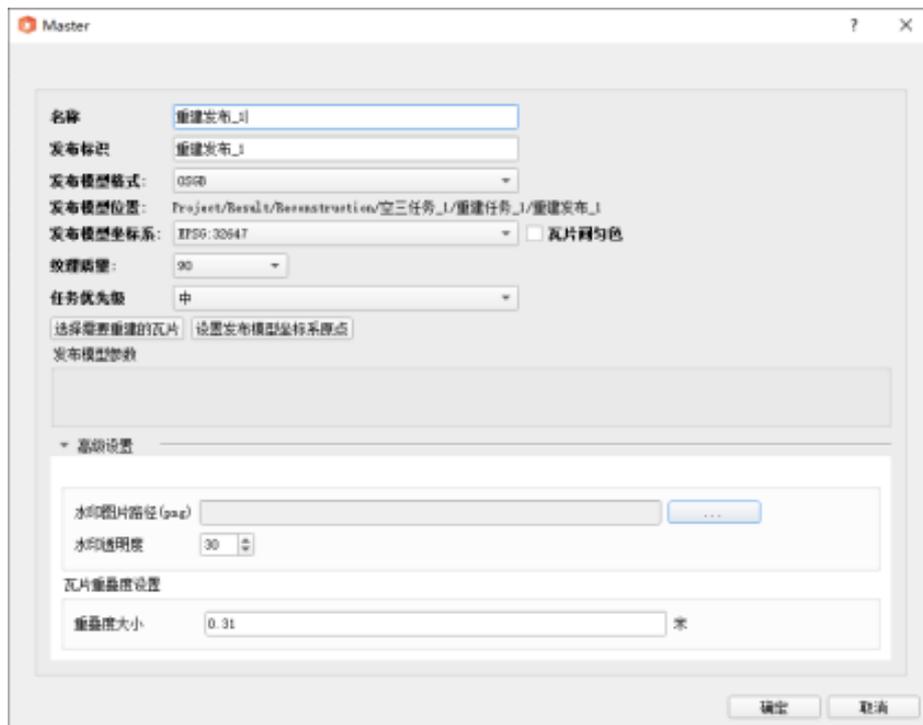


Supported Output Formats

Tiki3D currently supports conversion to the following formats:

- **OSGB, OBJ, DAE, 3DTiles, 3MX**
 - **LAS** (Point cloud data in .las format; sampling interval selectable in pixels or meters)

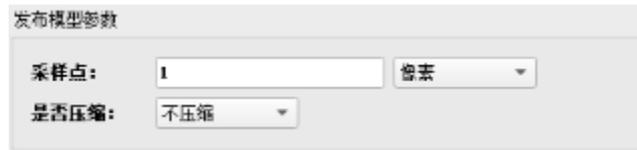

- **Esri i3S, SuperMap S3M, FBX, Google Earth 3D KML**
 - **DOM/DSM** (True Digital Orthophoto & Digital Surface Model)

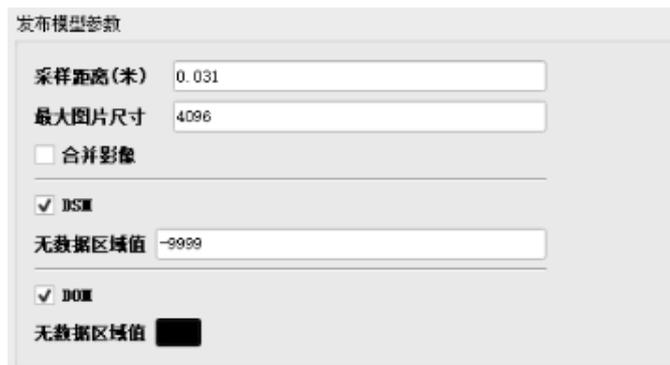

Key Conversion Options


- **Fast Ortho Mosaic:** Converts to .tif format (resolution depends on AT sampling rate).
- **DOM/DSM Generation:**
 - **Uncheck "Merge Images":** Outputs tiles separately.
 - **Check "Merge Images":** Stitches into a single large image (not recommended for massive datasets).

Execution & Monitoring

- After submission, a new conversion task appears under the reconstruction job.



- Launch the processing engine to begin conversion.
- Track progress and output paths directly in the software interface.

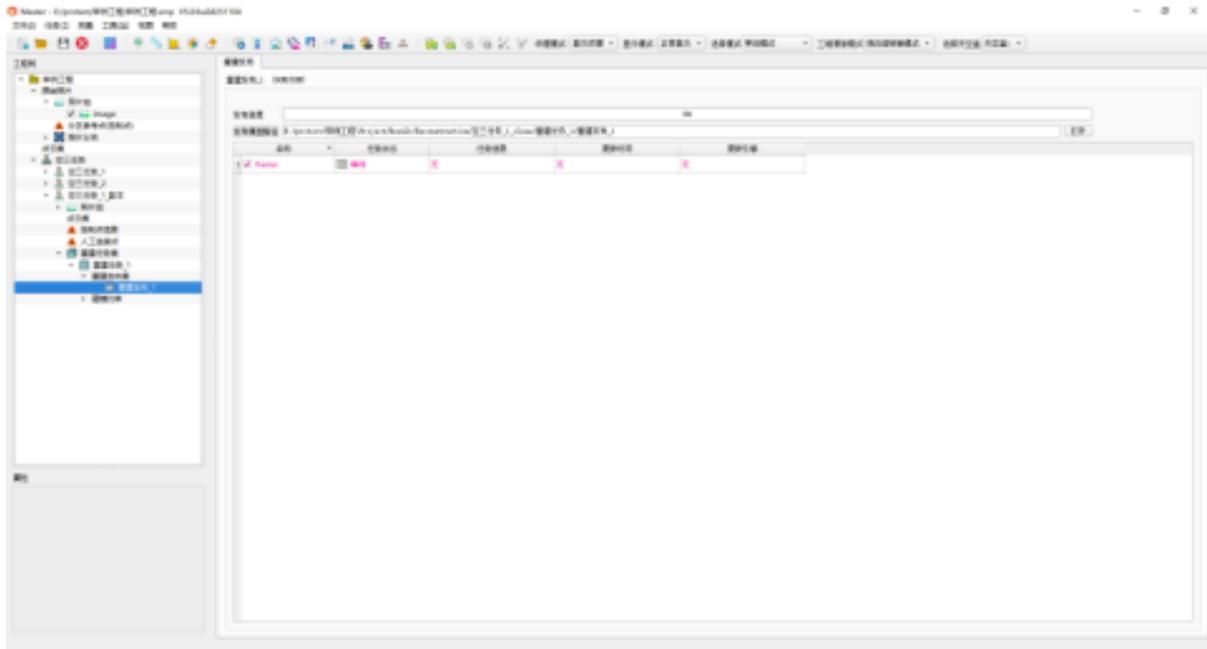

5.3.5.3 3D Model Result Visualization

After the model is generated, you can review its results in the software's 3D interface.

Navigation

Use the mouse to navigate the 3D scene:

- **Left-click + drag:** Adjust the viewing angle.
- **Mouse wheel:** Zoom in/out.
- **Middle-click + drag:** Pan the view.
- **Double-click:** Set the focus point on a specific area.

Display Options


- **3D View Auto-Adaptation:**
Click this button or press the **Spacebar** to reset the view to the default position.
- **Texture Mode:**
Toggle between:
 - **Textured View** (Refer to **Figure 153**)
 - **Grayscale View** (Refer to **Figure 154**)
 - **Normal Map View** (Refer to **Figure 155**)
- **Display Mode:**
Switch between:
 - **Solid View** (Refer to **Figure 156**)
 - **Wireframe Mode** (Refer to **Figure 157**)
 - **Point Cloud Mode** (Refer to **Figure 158**)

Tile Selection

- **Single Tile:** Click to select (highlighted in red).
- **Multi-Select:** Hold **Ctrl** while clicking.
- **Box Selection:** From the selection mode dropdown, choose **Box Select** to drag a selection area.

5.4 Tiki3D Viewer Browser

Tiki3D Viewer is a free, lightweight visualization software designed to explore and display 3D model data generated by Tiki3D within a unified scene.

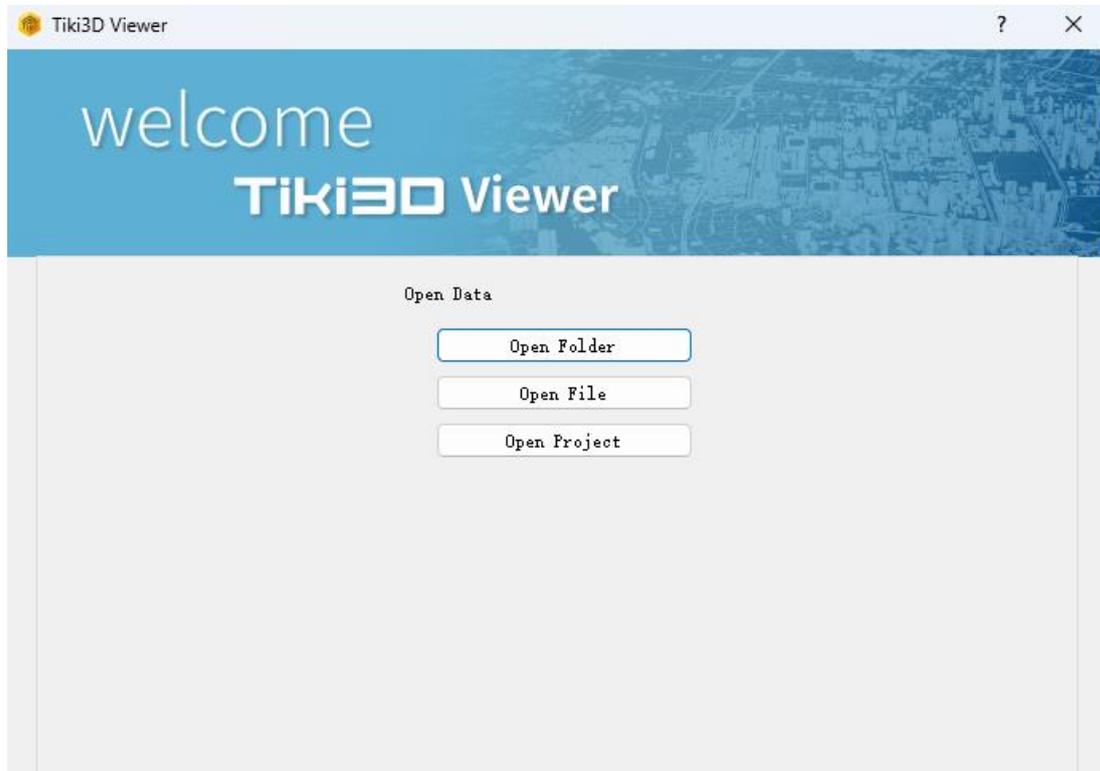


5.4.1 Data Loading

Folder	Tile_+023_+019	6/17/2024 9:20 AM	File folder
Folder	Tile_+023_+020	6/17/2024 9:20 AM	File folder
Folder	Tile_+023_+021	6/17/2024 9:20 AM	File folder
Folder	Tile_+023_+022	6/17/2024 9:20 AM	File folder
Folder	Tile_+023_+023	6/17/2024 9:20 AM	File folder
Folder	Tile_+023_+024	6/17/2024 9:20 AM	File folder
File	metadata	2/14/2025 9:16 PM	Microsoft Edge H...
File	newViewer.svps	12/18/2023 11:43 AM	SVPS File
File	Viewerrrd	8/16/2022 11:11 AM	Tiki3D Viewer proj...

- **Direct Folder Drag-and-Drop:**

Tiki3D Viewer automatically detects all model files within the folder. Alternatively, drag and drop an index file to open the model.

- **Supported Formats:** OSGB, SDB, OBJ, FBX.
- **Multi-Model Import:**
Simultaneously load models from multiple regions or individual tiles.
 - *Note:* For models created by other software, ensure the metadata.xml file is placed at the same directory level as the tile files.
- **Scene Merging:**
Models from the same area are automatically merged for unified viewing.

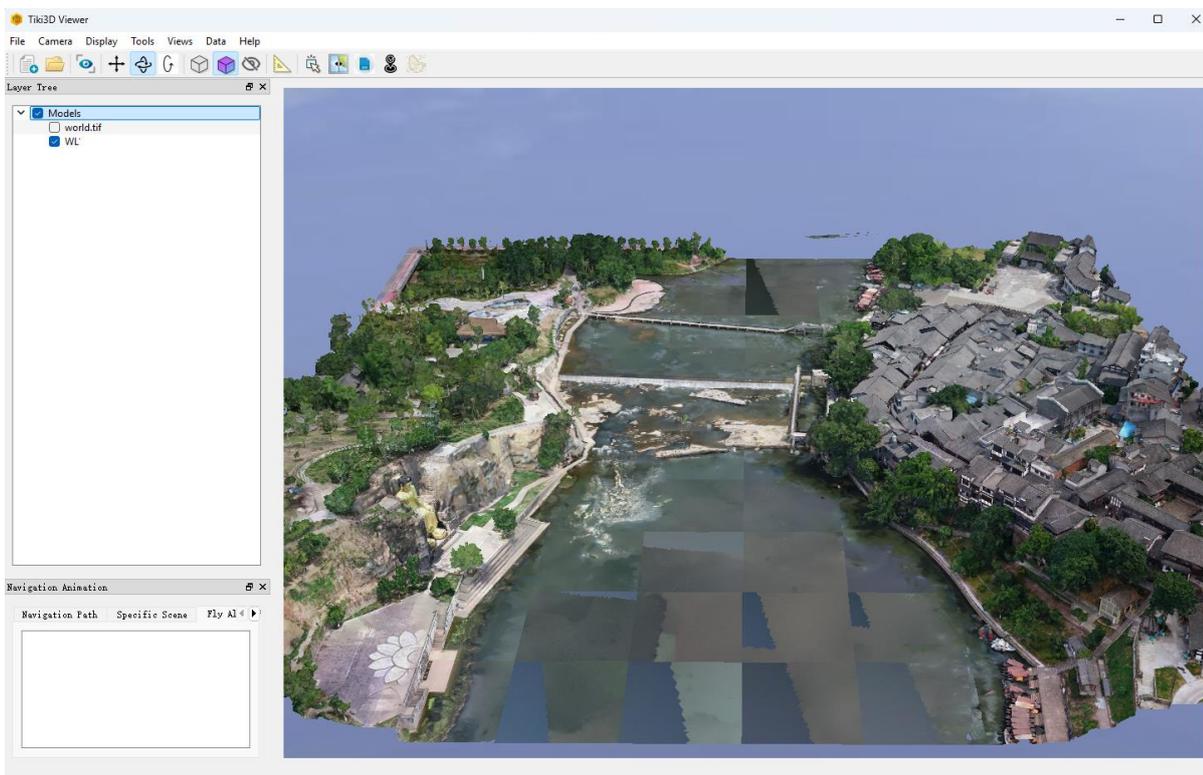

Post-Loading Features:

- Perform measurements.
- Set up navigation animations.
- Save the session as a project file (*File* → *Save*) for future use.

5.4.1.1 Merging Model Files

To merge multiple tile-based models:

1. **Pre-Merge Checks:**

a. Ensure consistent:

i. Tile Coordinate System

ii. Tile Origin

iii. Output CRS

iv. Output Origin

b. Tile sizes must match or be multiples of each other.

i. Purpose: Prevents naming conflicts and overlapping in merged models.


2. **Merge Steps:**

a. Copy all tile files into a single folder.

b. Drag the folder into **Tiki3D Viewer** to open.


c. Right-click the reconstruction task → **Create Index File** (supports .osgb/.sdb formats).

d. Open the model via the generated index file (e.g., scene.osgb).

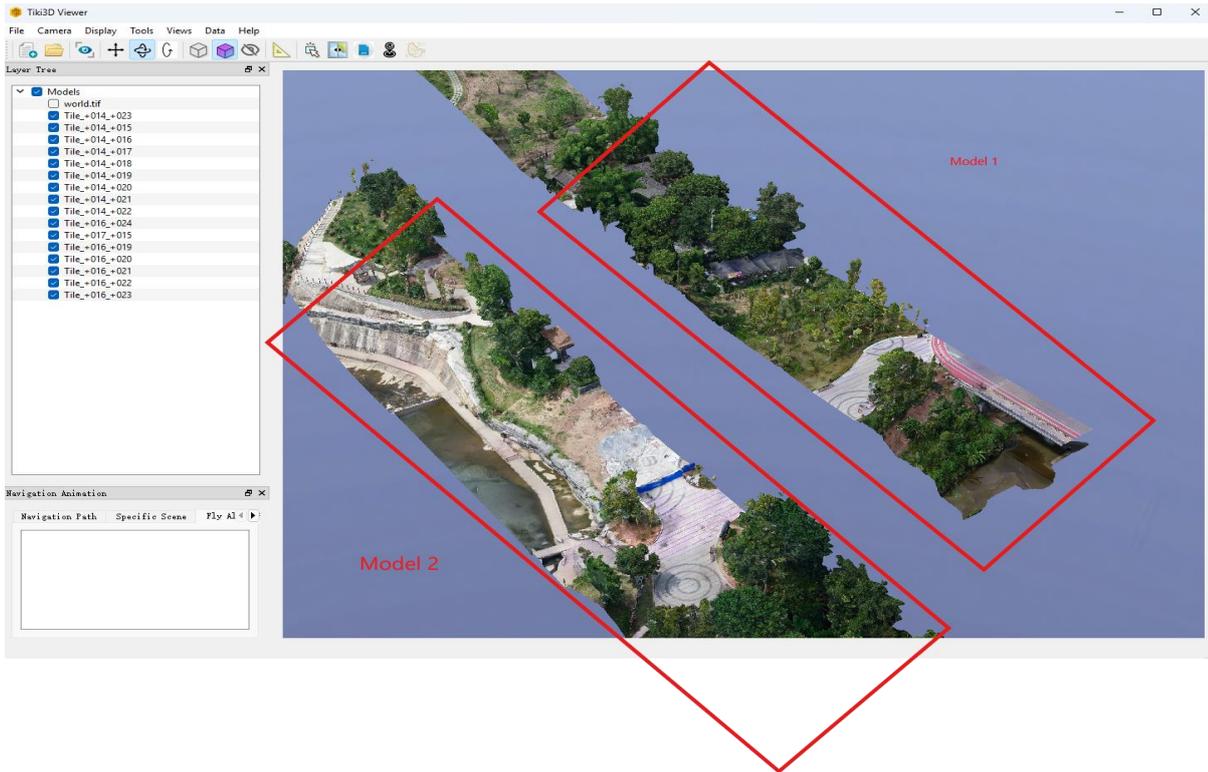

3. Index File Editing:

- a. Right-click → **Edit Index File**.
- b. *Selection Tools*:
 - i. Box selection (drag between two corners).
 - ii. Polygon selection (draw custom shapes).
- c. Selected tiles turn **yellow**; unselected tiles remain normal.
- d. Modify tile names as needed.
- e. Save changes to the index file.

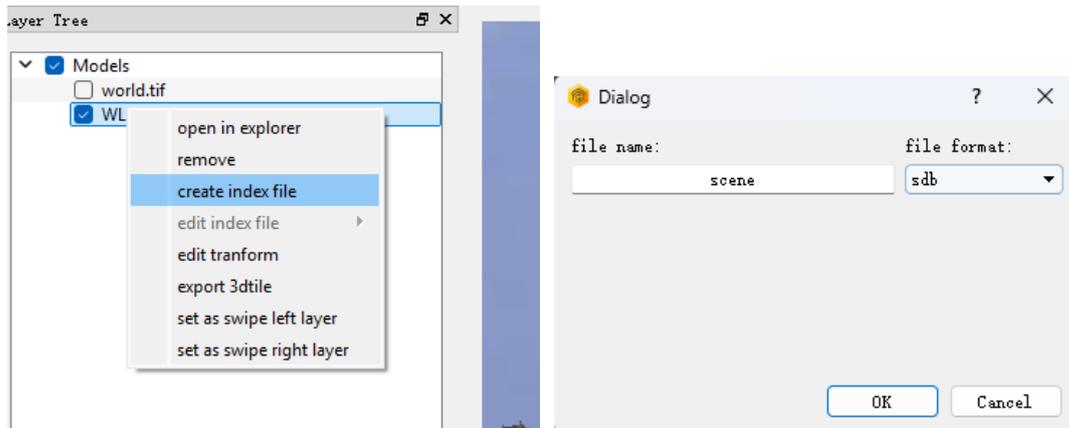

5.4.1.2 Merging Model Scenes

To combine multiple 3D scenes into one project:

1. Load all models into **Tiki3D Viewer** (*no need for coordinate consistency*).
2. **File** → **Save** to store as a unified project file.

5.4.1.3 Index Editing

- **Access:** Right-click the model name → **Edit Index File**.
- **Selection Methods:**
 - Box/Polygon/Point-based tile selection.
 - Selected tiles highlight in **yellow** (both in 3D view and tile list).
- **Save:** Export edits to a new .osgb index file.


5.4.2 Outputting High-Resolution Images

Select **【Tools】** → **【Export High-Resolution Image】** to export a high-definition image of the current view at a custom resolution.

- In the pop-up window, select the output path and specify the **resolution** (higher values produce sharper images).
- The software generates multiple sub-images based on the resolution, which must be merged for final

use.


- The merged result is shown below.

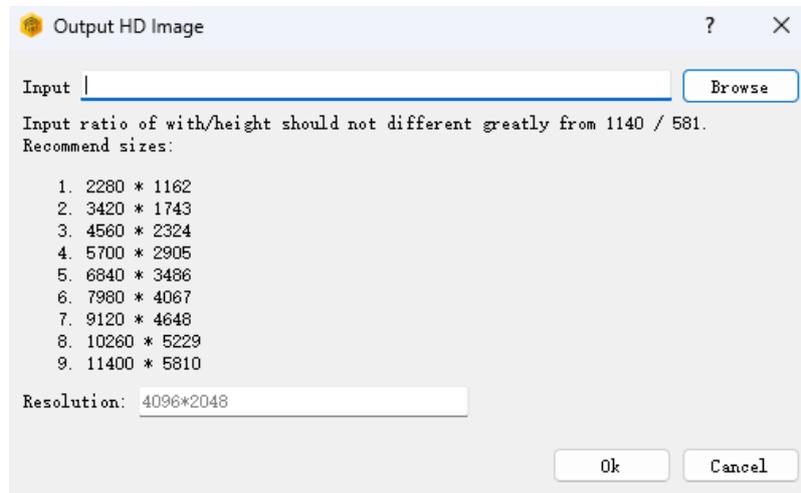

5.4.3 Measurement


Includes: **Coordinate measurement, Distance measurement, Area measurement, Volume measurement.**

Access via **【Tools】** → **【Measure】** or click the measurement icon.



① Coordinates

- Displays coordinates in the **local CRS** (default) or a manually selected CRS.
- The measurement window shows the coordinates of the clicked position.

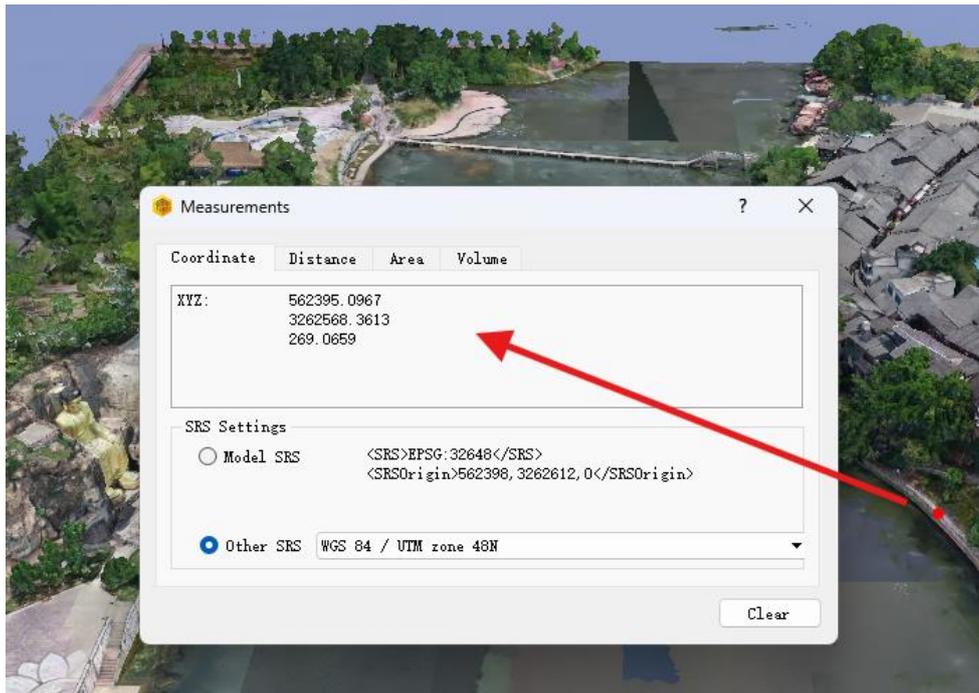


② Distance, Area, Volume

- **Distance:**
 - Left-click to start, right-click to end.
 - Measures multi-segment lengths and total distance.




- **Area:**

- Left-click to draw a polygon, right-click to close.
- Calculates surface area and perimeter based on the 3D contour's average plane projection.

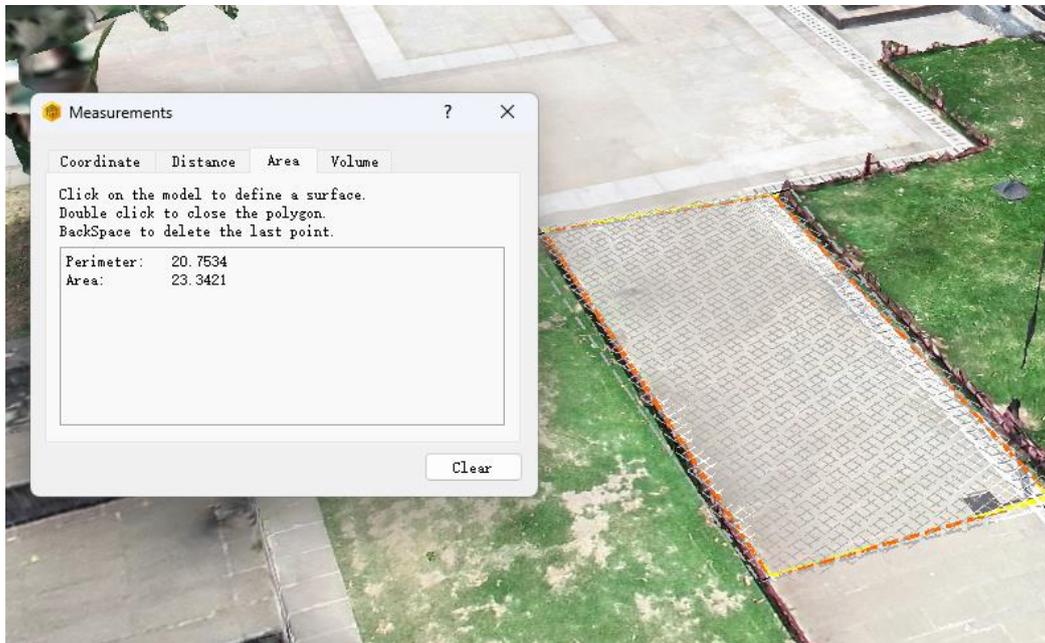



- **Volume:**
 - Measures the volume between a **reference plane** and the 3D model.
 - Left-click to define the contour, right-click to finish. Press **Spacebar** to undo the last point.
 - **Cut Volume:** Volume **above** the reference plane.
 - **Fill Volume:** Volume **below** the reference plane.

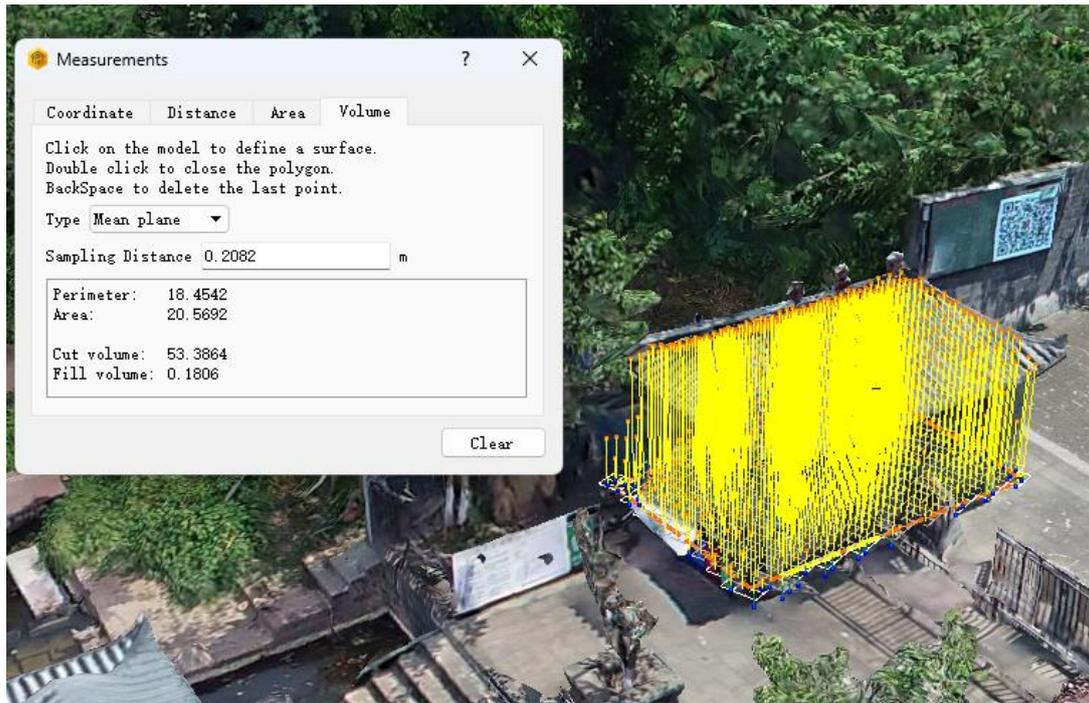

5.4.4 Browsing Modes


- **Wireframe Mode:** Press **W**.
- **Texture Mode:** Press **T**.
- **Fullscreen Mode:** Press **F11**.



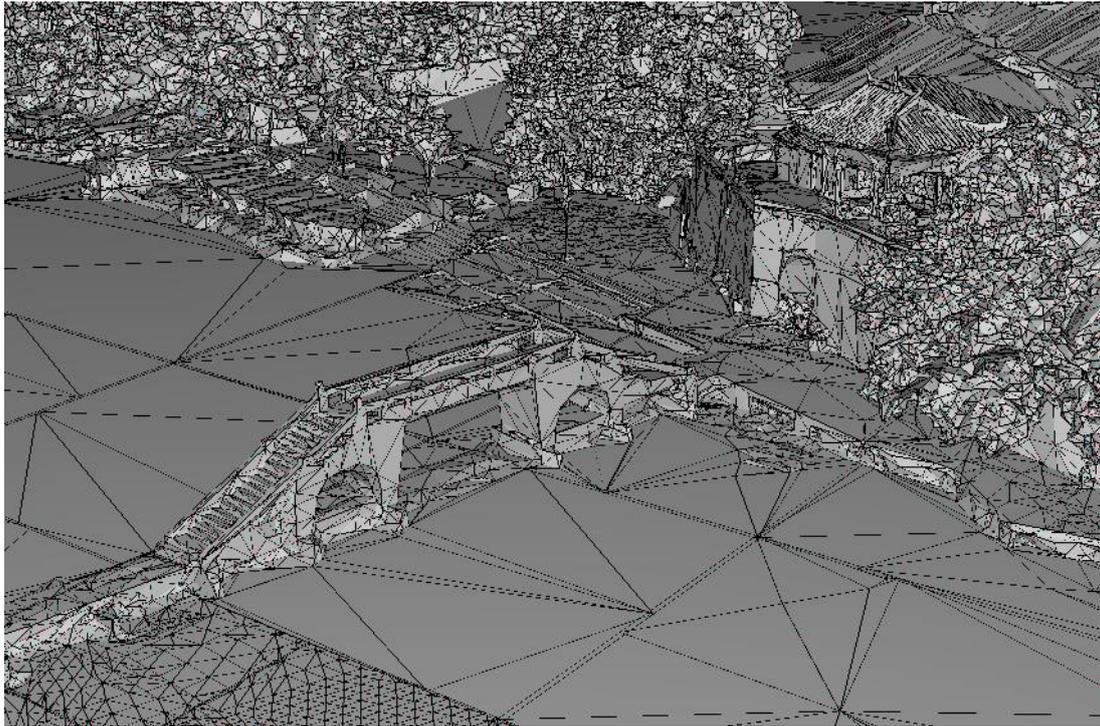


Tile Name Inspection



- **Tile Marking Tool:**
 - Select tiles by name and export the list to a **TXT file**.
 - Access via **【Tools】** → **【Tile Marking Tool】** .
 - Right-click tiles to mark them; add notes in the table's second column.
 - Save the marked tiles after completion.

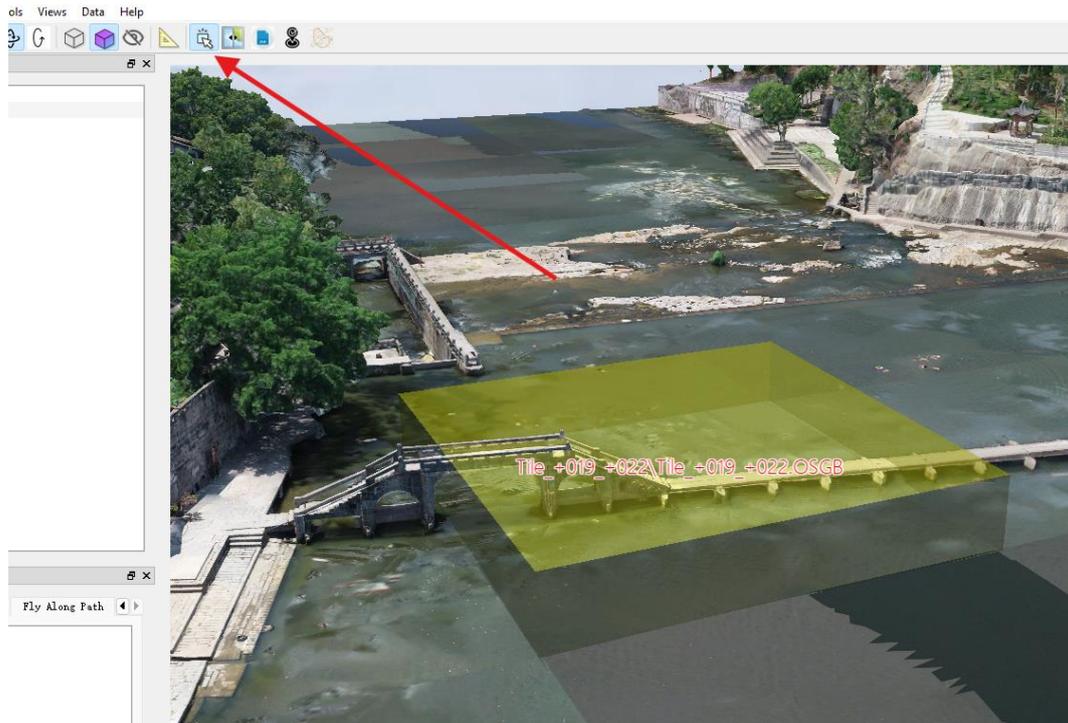

5.4.5 Model Animation

1. Right-click the **Navigation Animation Bar** → **New Path** (or load a **CC animation path**).
2. Adjust viewpoints and set transition times for speed control.
3. Right-click the path → **Play** to start the fly-through.

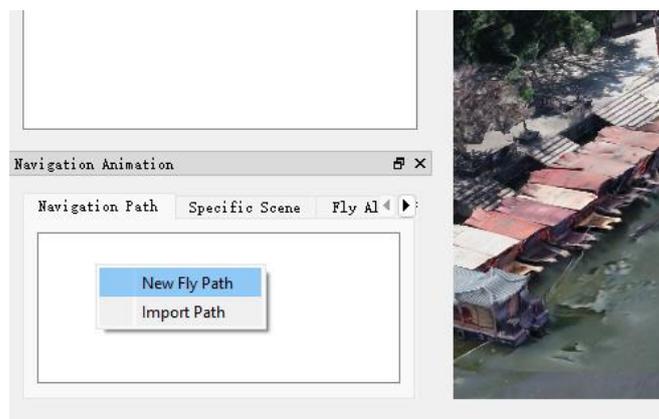

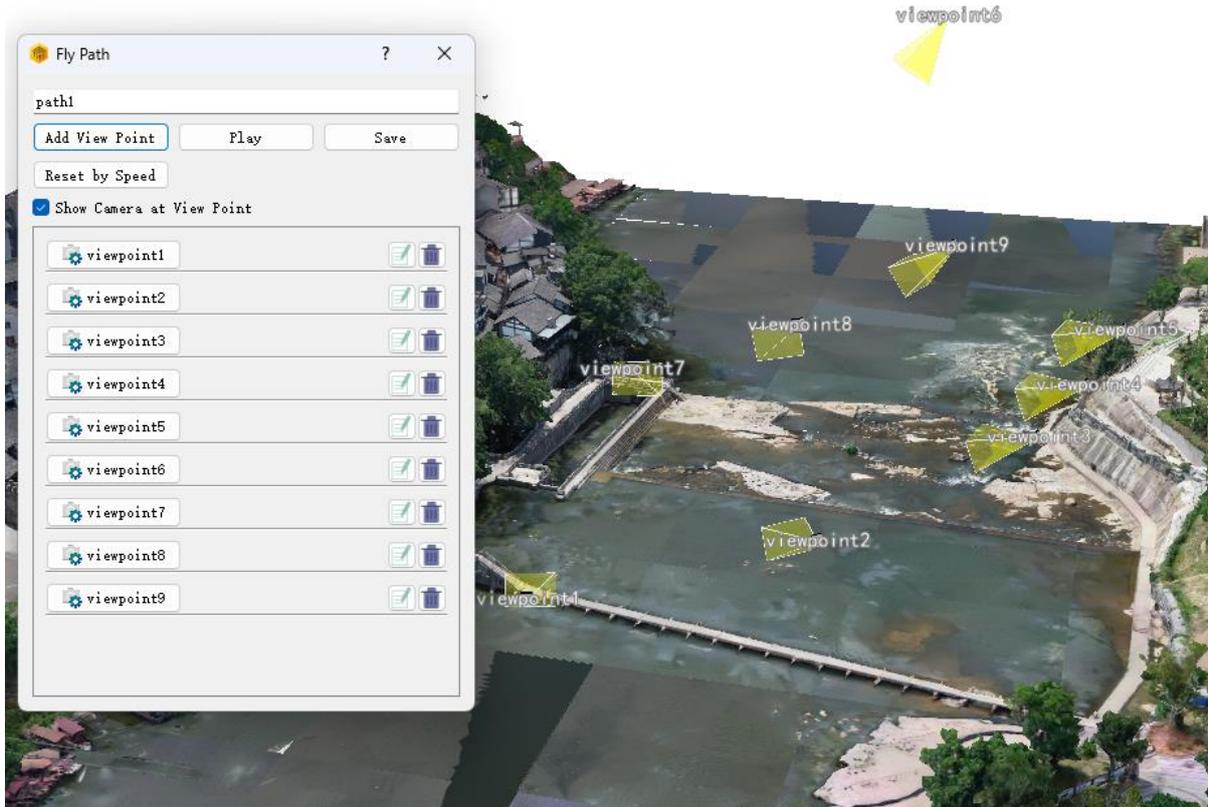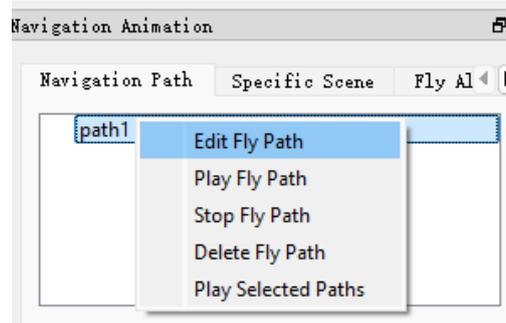

5.4.6 Deformation Detection

1. Click the **Generate DEM** icon.



2. Set **sampling interval** and **elevation tolerance**.
3. The software automatically compares data and calculates volumetric differences between terrains.
4. Switch to **White Model Mode** for clearer visualization.

5.4.7 Split-Screen Mode

Compare terrain changes between two time periods.

1. Load both models into **Tiki3D Viewer** (ensure alignment).
2. Right-click **Model A** → **Set as Left Swipe Layer**.
3. Right-click **Model B** → **Set as Right Swipe Layer**.
4. Click the **Swipe Tool** icon.
5. Hold **Ctrl + Drag** to adjust the swipe position.

5.4.8 Accuracy Verification

1. Click Accuracy Check, then select the checkpoint file's CRS.
2. File format: Point Name, X, Y, Z.

3. Double-click a checkpoint, then click its location in the model to display the error.
4. Export a full accuracy report after verification.